


ILLUSTRATIONS



ENVIRONMENTAL PROTECTION

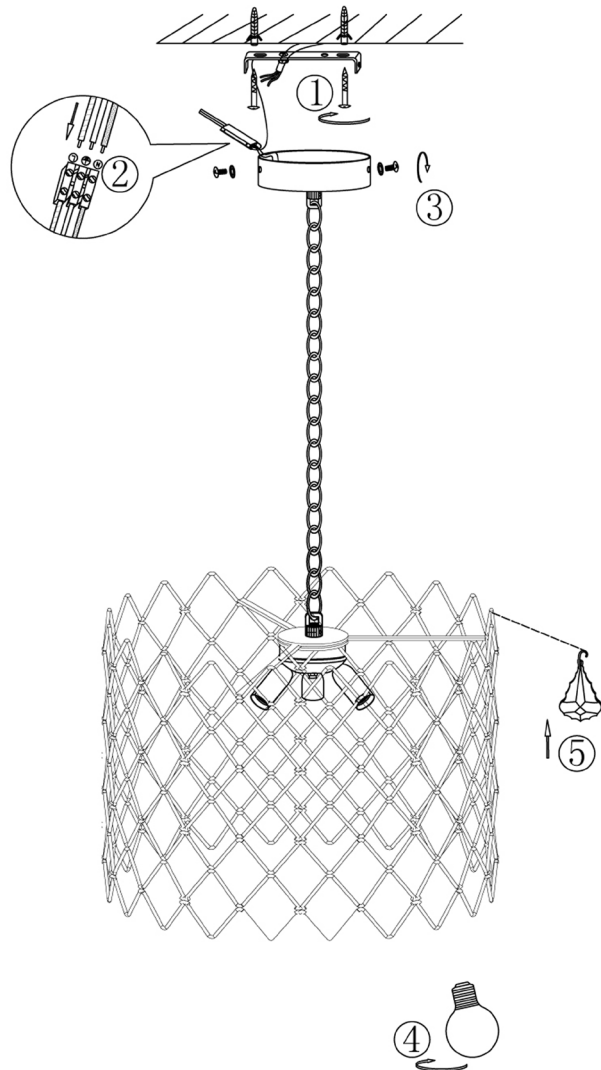

Waste electrical & Electronic equipment regulations requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such products from other waste types and recycle it responsibly at your local facilities.

eurolux
Lighting your way

Round Chrome Crystal Pendant



Excluding 3 x E14 Max 60W

PRODUCT CODE

P374CH

Cape Town - 9 Racecourse Road, Milnerton, 7441
Johannesburg - 10 Milkyway Avenue, Linbro Business Park, Sandton, 2065
email: admin@eurolux.co.za, web: www.eurolux.co.za

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Fitting material:** Chrome coloured steel with clear glass crystal.
- **Lamp type:** Excluding: 3 X E14 60W Max
- **Voltage:** 220V - 240V ~ 50Hz.
- **Protection against electric shock:** Class 1. Requires earthing.
- **IP Rating:** IP20. Dust Protected. Protected against solid foreign objects of 12.5mm Ø and greater. Not protected against water. • Commercial / domestic use
- Not suitable for outdoor use.
- Not for use in areas exposed to moisture e.g. bathrooms or kitchens
- **Maximum Ambient temperature range:** 20°C - 40°C.
- **Dimensions:** (H) 250mm X (Ø)410mm.
- **Chain length:** 510 mm

IMPORTANT SAFEGUARDS

P374 - attachments:

If the external flexible cable or cord of this luminaire is damaged, it should be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard. To ensure that you get maximum longevity and maximum use out of your luminaire, please observe the following safety instructions.

- ⚠ Electrical products can cause death, injury, or damage to property. Installation of the luminaire must be carried out by a qualified electrician, in accordance with SANS 10142. On completion of installation, ensure that the Certificate of Compliance is updated.

- On completion of installation, ensure that the Certificate of Compliance is updated.
- Before connecting the luminaire, ensure that voltage indicated on the rating label corresponds with the mains voltage in your home.
- When changing the lamp, ensure that the power is turned off.
- Ensure that the correct lamp type and wattage is fitted.
- This luminaire is checked in full for conformity to the quality standards and safety requirements.
- The manufacturer / supplier is not responsible for any damage of properties and persons, caused by the incorrect use or installation of the luminaire.
- Should you be unsure of how to install this luminaire correctly, please consult a professional electrician or your supplier for assistance.
- Ensure all items / components, threads and screws are tightly secured.

IMPORTANT:

- Tampering with this luminaire, i.e using silicon sealers or incorrect cabling, will invalidate your warranty.
- When the protection glass is damaged, it should be replaced immediately. The luminaire must not be used without the protection glass.
- Please check whether the connection of the power cord is safe and reliable before installation.
- If your mains wiring differs in any way from diagram luminaire, consult a qualified electrician.
- Always ensure that the mains supply voltage is correct.
- Always replace the lamp with one of an identical rating and wattage.
- Choking hazard: May contain small parts. Keep away from children.
- Do not insert your fingers or any part of your body into the electrical contact and sockets of this product whilst it is connected to the electrical supply.
- Item may vary slightly from the picture on the carton.
- Coastal humidity may effect the longevity of the luminaire.
- Outdoor luminaires must be cleaned to prevent rust occurring.

INSTALLATION

- Before installation always ensure the power supply is turned off.
- This luminaire is only suitable for fixed mounting.
- Not for use outdoors or in areas exposed to moisture EG. Bathrooms or Kitchens
- Insert masonry plugs into the mounting surface. Test to ensure the mounting surface will hold the weight of the fitting.
- Connect main supply into terminal block making sure all connections are tight.
- Connect the blue/brown wires to the L and N position of the lamp socket, and connect the green/ yellow wires to the lamp body where the earth symbol is placed.
- Fix the fitting onto the bracket with screws (3).
- Fix the bulb (4) to the lamp holder.
- Fix the crystals (5).
- Reconnect power supply.

CLEANING

- Before cleaning always ensure the power supply is turned off.
- Do not immerse the luminaire in water.
- No abrasive products, solvents, detergent may be used to clean this luminaire.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- Use a soft white cloth to clean.