

conecto Elasto

Expansion profiles consist of aluminum clamps connected by an elastomer expansion joint.

The elastomer component is made of modified PVC for better durability and enhanced wear, resistance to UV and aggressive chemicals.

Confined cover is a significant advantage of the system.




With a small minimum installation height, the system can be used without grooving for 3 mm PVC carpets, 5 mm textile carpets, or tile slabs.

The profiles perfectly suit as flush mounted floor, wall and ceiling applications.

Elastomer types:



10 colors available

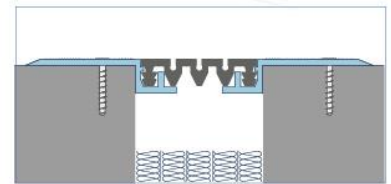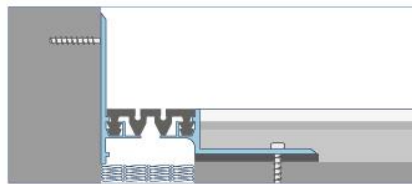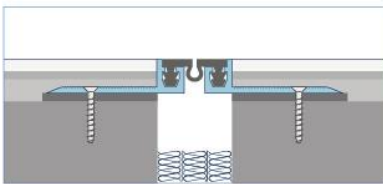

Profile type conecto Elasto	Visible element (mm)	Joint width (mm)	Base width (mm)	Installation height (mm)	Material type	Maximum load (kN)	Horizontal/Vertical compensation (mm)
EL.30.6	30	30	150	N, 5, 7, 10, 12, 14, 20, 24, 30, 40, 50, 60, 70, CV	Aluminum, modified PVC	30	12 (± 6) 12 (± 6)
EL. 50.8	50	50	175	N, 5, 7, 10, 12, 14, 20, 24, 30, 40, 50, 60, 70, CV	Aluminum, modified PVC	30	16(± 8) 16(± 8)
EL.65.10	65	65	185	N, 5, 7, 10, 12, 14, 20, 24, 30, 40, 50, 60, 70, CV	Aluminum, modified PVC	30	20 (± 10) 20 (± 10)