



SLIDING WINDOW RANGE

Betcrete Innovative windows.

The SIDE HUNG WINDOW RANGE is a specific range of windows used in conjunction with the standard windows or on it's own.

Betcrete Window consist of the Betcrete Polycrrete Outer frame and the Aluminium sliding insert. These windows comes in a specific Range of sizes, various aluminium colour and glass types.

INDEX with page numbers

PAGE 1/7




Sliding Windows Sizes

2



Window Installation

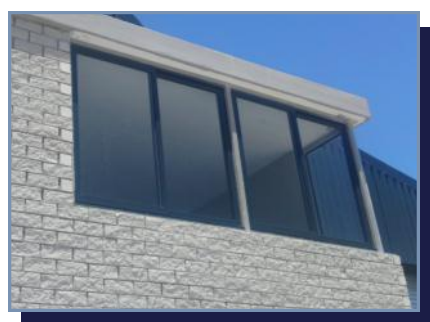

Technical Information

4-5




Betcrete™
INNOVATIVE POLYMER PRODUCTS




SLIDING WINDOW RANGE


BSL126
1190 x 590




BSL129
1190 x 890




BSL1212
1190 x 1190




BSL1512
1490 x 1190



BSL1215
1190 x 1490



BSL1515
1490 x 1490





WINDOW INSTALLATION

PAGE 4/8

Betcrete Polycrete Window frame is standardly build into the wet phase of the Building proses.

Window can also be epoxied in afterwards.


More information to follow soon.



Betcrete™
INNOVATIVE POLYMER PRODUCTS



EXTERIOR RANGE

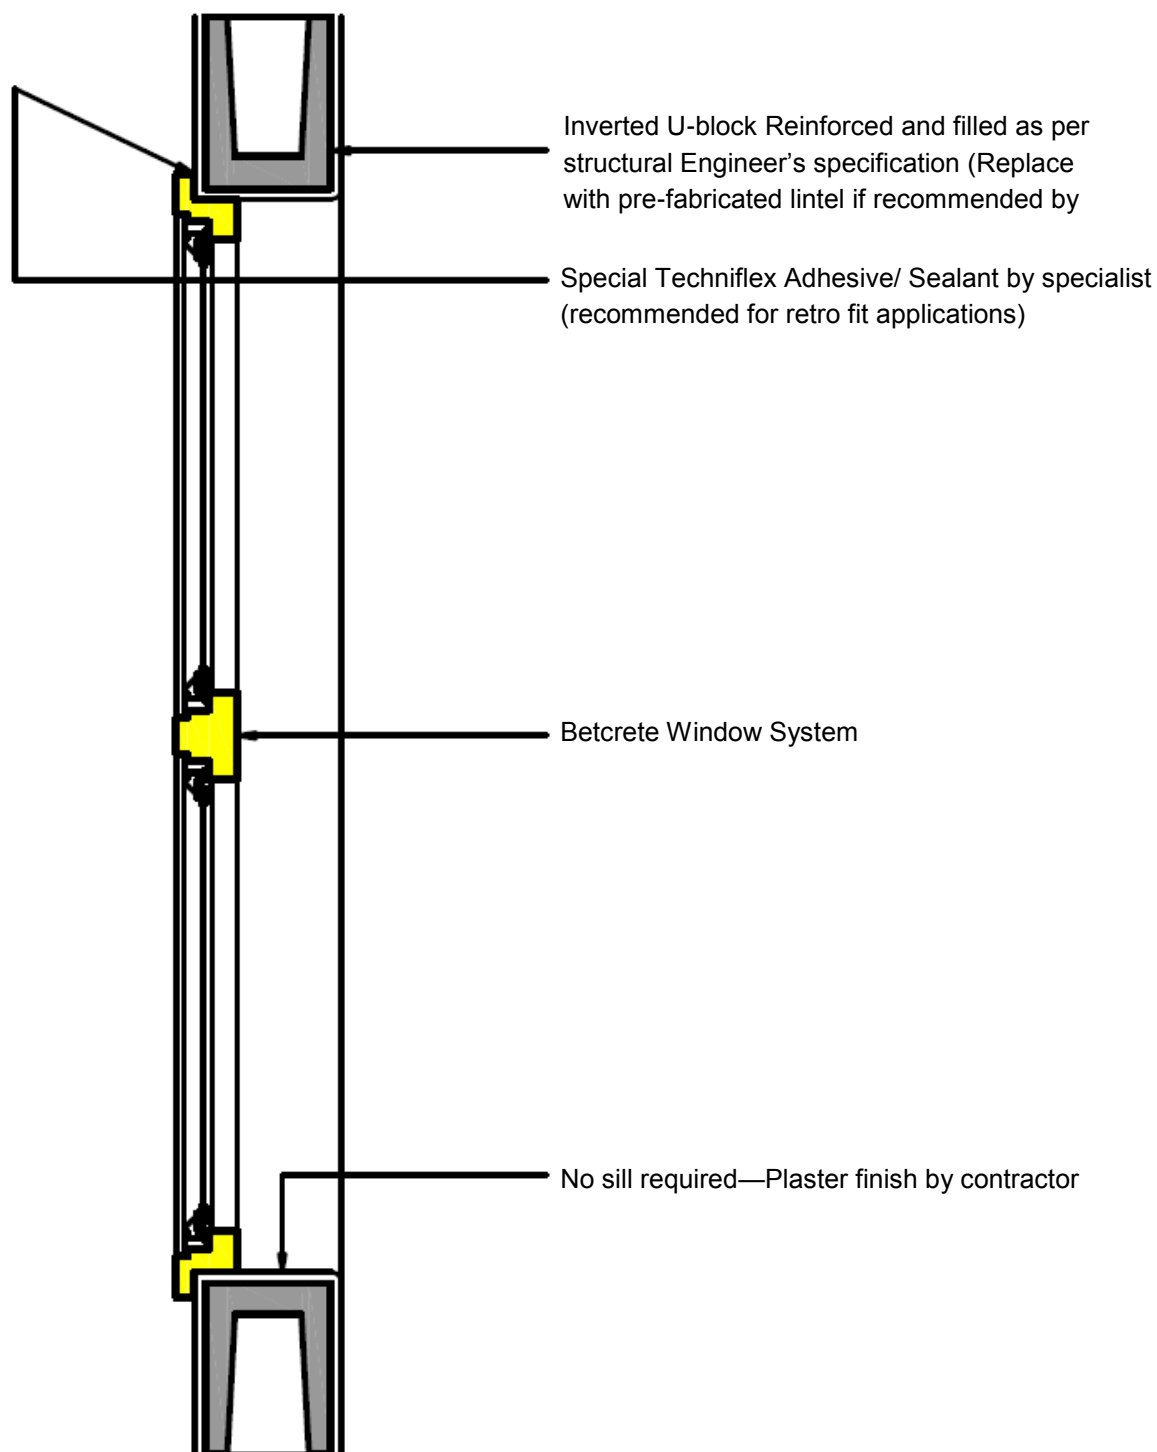



Information will follow soon.

GLASS



Betcrete is a member of the AAAMSA group and adhere to SAGGA regulation:

- Max 0.75m^2 = 3mm Glass
- Max 1.50m^2 = 4mm Glass
- Max 2.10m^2 = 5mm Glass
- Max 3.20m^2 = 6mm Glass
- Safety glass when lower than 500mm from ground
Read more on AAAMSA website
- Betcrete Safety Glass - Marked with **B①**