



INTERIOR DOUBLE LIFE TIMBAVARNISH



PRODUCT USES

For application to all new interior wooden surfaces such as furniture, built-in cupboards, panelling, skirting boards and doors where a durable finish is required.

Not suitable for wooden floors.

May also be used over previously varnished interior surfaces, provided the surface is sound and not cracked or flaking.



FEATURES AND BENEFITS

Available in 3 levels of gloss - high gloss, eggshell and matt.

Quick drying with low dirt pick-up.

Extremely hard finish which resists heat from hot coffee cups, etc and household stains.

Very easy to apply with good flow to give a professional finish.

Excellent hold-out that gives uniformity of gloss, sheen or mattness in depth.



PRODUCT INFORMATION


Appearance	High Gloss Sheen and Matt
Colour	Clear only
Density at 23°C	Approx. : 0.92 kg/L.
Solids Content	By weight : Approx. 49% By volume : Approx. 41%
Packaged Viscosity	Viscosity at 23°C : Approx 55 seconds
Spreading Rate	Approx 10m ² per litre depending on surface porosity, profile and application method
Recommended DFT per coat	Min. 25µm. Max. 35µm.



APPLICATION INFORMATION

Application conditions	Surface Temperature between 10 - 35°C Relative Humidity between 10 - 85 %
Thinner	Mineral Turpentine if required
Drying Time	Touch dry 4 hours (Drying times will be extended during cold, wet or humid conditions)
Recoating Time	18 hours (overnight)
Cleaning of equipment	Fixit Brush Cleaner/Degreaser or Mineral Turpentine
Substrates	Suitable for application to all interior wooden furniture, windows, doors, barge boards, etc.

High performance varnish available in high gloss, sheen and matt

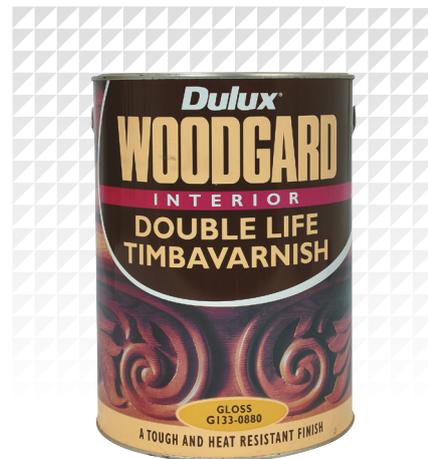



APPLICATION INFORMATION

Precautions

Ensure that surfaces are sound and free from dust, dirt, grease and oil. Surfaces must be thoroughly dry - no more than 12% moisture content.

Do not apply during cold (below 10°C) or wet weather.

Stir well before use.

Do not apply directly to bare metal surfaces – stop nail holes with wood filler.

Do not apply to wet or damp timber.

It is important to treat the end grain of timber to prevent moisture ingress.

N.B. Woodgard Interior Double Life Timbavarnish is not recommended for floors or decking.

APPLICATION METHODS

Brush/Roller (short-nap mohair or foam)

Apply first coat thinned up to 10% with Mineral Turpentine.

Allow to dry overnight and sand lightly with 320 grit paper.

Apply second coat.

For maximum protection, apply a third coat, sanding lightly between coats

Conventional Spray

Thin up to 10% with Mineral Turpentine.

N.B. Thinning reduces solids, therefore more coats will be needed to produce the same colour, build, gloss and durability.

Coats Required

For new work, apply three coats.

Apply one to two coats for general maintenance.



SURFACE PREPARATION

NEW SURFACES

New interior surfaces must be clean, dry and well sanded.

Sand lightly between coats.

PREVIOUSLY PAINTED SURFACES

Sound surfaces should be well sanded.

Varnish which is cracked and flaked must be stripped to bare wood either by sanding or by the use of **Fixit Double Strength Paint Remover**.

Sand any discoloured areas to fresh wood.

For maximum protection of exterior timber, apply three coats of varnish.



HEALTH AND SAFETY INFORMATION

For detailed safety information refer to Material Safety Data Sheet.

Keep out of reach of children.

Ensure good ventilation during application and drying.

Flash Point 37°C.



ADDITIONAL INFORMATION

Storage Conditions

Store under cool dry conditions.