
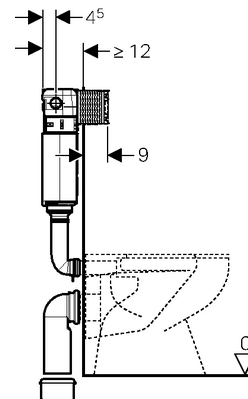


Omega concealed cistern 12 cm, 6 / 3 litres, installation height 106 cm

PRO_142009

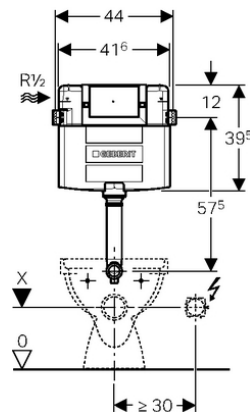

Verwendungszwecke / Application Purposes

- For masonry walls
- For installation in part- or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing and wall-hung WCs
- For dual flush

Eigenschaften / Characteristics

- Concealed cistern with front actuation, fully insulated against condensation
- Immediate post flush possible with factory setting
- Flush bend welded
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the left or rear left
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length

Technische Daten / Technical Data

Flow pressure	10-1000 kPa
Minimum flow pressure	0.5 bar
Minimum flow pressure	50 kPa
Maximum operating temperature, water	25 °C
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 / 7.5 l
Flush volume small, adjustment range	3-4 l
Calculated flow rate	0.11 l/s

Lieferumfang / Scope of delivery

- Water supply connection R 1/2, compatible with MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Connection set for WC, ø 90 mm
- Connection bend, ø 90 / 110 mm
- 2 protection plugs
- 2 fixing brackets
- Fastening material

Bestelltabelle / Order Table

Art. no.

109.060.00.1

Zusätzlich zu bestellen / To order additionally

Zubehör / Accessories

Interne Daten / Internal Data

Art. no.	Material short text	Sales launch date	GS
109.060.00.1	C/C Omega-12 H106 90/110 DE	2014-07-01	50

Logistik Daten / Logistic Data

Art. no.	PU1[Pc.]	PU4[Pc.]	PU1 - L x W x H[mm]	VP4 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
109.060.00.1	1	24	790 x 145 x 608	1200 x 800 x 1820	4.124	3.324