
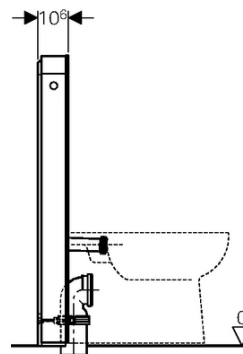


sanitary module for floor-standing WC, 101 cm, with connection bend 90°, water supply connection, bottom

PRO_143600



Verwendungszwecke / Application Purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with P-bend and flush water inlet height 32–36 cm above the floor (EN 33)
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For mounting on finished floors
- For installation in front of solid walls

Eigenschaften / Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Front cladding made of glass (ESG)
- Height compensation ± 1 cm
- Cistern fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection on the left/right possible
- Water supply connection, bottom
- Soft-touch buttons for flush actuation and odour extraction
- Orientation light and odour extraction activated when a user approaches
- Orientation light can be set in seven colours
- User detection range can be set
- Day/night detection can be set for orientation light
- Odour extraction unit with filtration, integrated in the concealed cistern
- Odour extraction unit with active carbon filter can be installed without tools
- Ceramic honeycomb filter for odour neutralisation can be replaced without tools
- Odour extraction unit automatically switches off after a predefined running time
- Operation with extra-low voltage, no mains voltage in cistern
- Mains connection with flexible three-wire sheathed cable

Technische Daten / Technical Data

Protection degree	IPX4
Nominal voltage	100-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Power consumption	5 W
Flow pressure	0.1-10 bar
Flow pressure	10-1000 kPa
Maximum operating temperature, water	25 °C
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 l
Flush volume small	3 l

Lieferumfang / Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- Female socket for mains connection
- Power supply unit
- Fastening material for solid wall

Bestelltabelle / Order Table

Art. no.	Colour / Surface
131.201.SI.1	white glass
131.201.SJ.1	black glass
131.201.SQ.1	umber glass

Zusätzlich zu bestellen / To order additionally

Zubehör / Accessories

Geberit outlet mounting box

Interne Daten / Internal Data

Art. no.	Material short text	Sales launch date	GS	GS 51 as of	GS 52 as of	Assortment status
131.201.SI.1	MLith Plus WC fl-st Al-b bc out-bend 90G	2014-01-01	50	2016-04-01	2016-07-01	Active
131.201.SJ.1	MLith Plus WC fl-st Al-b bc out-bend 90G	2014-01-01	50	2016-04-01	2016-07-01	Active
131.201.SQ.1	MLith Plus WC fl-st Al-b bc out-bend 90G	2014-01-01	50	2016-04-01	2016-07-01	Active

Logistik Daten / Logistic Data

Art. no.	PU1[Pc.]	PU1 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
131.201.SI.1	1	1200 x 600 x 200	28	26.2
131.201.SJ.1	1	1200 x 600 x 200	28.022	26.022
131.201.SQ.1	1	1200 x 600 x 200	28	26.2