
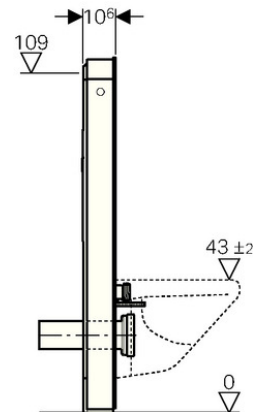


## sanitary module for wall-hung WC, 114 cm, with straight connector, water supply connection, rear centre

PRO\_143645

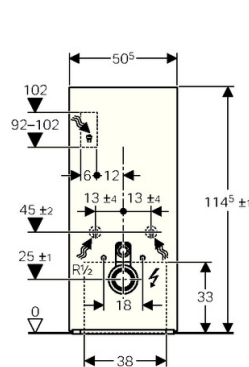

### Verwendungszwecke / Application Purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height 23 cm
- For replacing wall-hung WCs with close-coupled exposed cisterns
- For replacing wall-hung WCs with pressure flushing valve with additional water supply connection set
- For replacing wall-hung WCs with concealed cistern with maximum service opening height 109 cm
- For connecting Geberit AquaClean Sela
- For connecting Geberit AquaClean Mera
- For mounting on finished floors
- For installation in front of solid walls

### Eigenschaften / Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Front cladding made of glass (ESG)
- Height compensation  $\pm 1$  cm
- Fastening height WC ceramic appliance  $35 \pm 1$  cm
- Cistern fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Adjustable flush volume
- Water supply connection, rear centre
- Water supply connection on the left/right possible
- Water supply connection on the bottom possible
- Soft-touch buttons for flush actuation and odour extraction
- Orientation light and odour extraction activated when a user approaches
- Orientation light can be set in seven colours
- User detection range can be set
- Day/night detection can be set for orientation light
- Odour extraction unit with filtration, integrated in the concealed cistern
- Odour extraction unit with active carbon filter can be installed without tools
- Ceramic honeycomb filter for odour neutralisation can be replaced without tools
- Odour extraction unit automatically switches off after a predefined running time
- Operation with extra-low voltage, no mains voltage in cistern
- Mains connection with flexible three-wire sheathed cable

### Technische Daten / Technical Data

Protection degree	IPX4
Nominal voltage	100-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Power consumption	5 W
Flow pressure	0.1-10 bar

Flow pressure	10-1000 kPa
Minimum flow pressure	0.5 bar
Minimum flow pressure	50 kPa
Maximum operating temperature, water	25 °C
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 l
Flush volume small	3 l
Calculated flow rate	0.11 l/s

### Lieferumfang / Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend 90° made of ABS, ø 50 / 44 mm, 23 x 23 cm
- Sleeve made of EPDM, ø 44 / 55 mm
- Straight connector made of PE-HD, ø 90 mm
- Adapter socket made of PE-HD, ø 90 / 110 mm
- 2 threaded rods M12
- Sound insulation set
- Female socket for mains connection
- Power supply unit
- Fastening material for solid wall

### Bestelltabelle / Order Table

Art. no.	Colour / Surface
131.231.SI.1	white glass
131.231.SJ.1	black glass
131.231.SQ.1	umber glass

### Zusätzlich zu bestellen / To order additionally

#### Zubehör / Accessories

Water supply connection set, bottom, for Geberit Monolith sanitary module for WC, 114 cm Geberit outlet mounting box

### Interne Daten / Internal Data

Art. no.	Material short text	Sales launch date	GS	GS 51 as of	GS 52 as of	Assortment status
131.231.SI.1	MLith Plus WC w-h Al-b strt ct 6/3L H114	2014-01-01	50	2016-04-01	2016-07-01	Active
131.231.SJ.1	MLith Plus WC w-h Al-b strt ct 6/3L H114	2014-01-01	50	2016-04-01	2016-07-01	Active
131.231.SQ.1	MLith Plus WC w-h Al-b strt ct 6/3L H114	2014-01-01	50	2016-04-01	2016-07-01	Active

### Logistik Daten / Logistic Data

Art. no.	PU1[Pc.]	PU1 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
131.231.SI.1	1	1200 x 600 x 200	31.92	29
131.231.SJ.1	1	1200 x 600 x 200	31.92	29
131.231.SQ.1	1	1200 x 600 x 200	31.92	29