


Front View
Scale 1:4

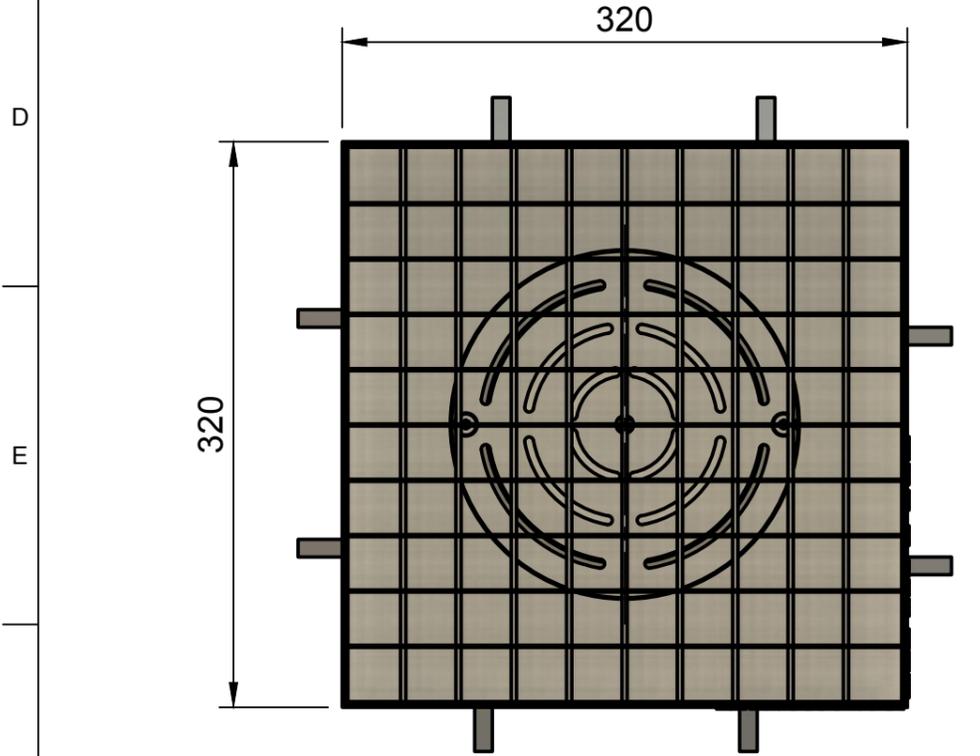

Top View
Scale 1:4


GTS 200 H Heavy Duty Floor Drain with Grating

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Grating frame type: square
- Top cover plate type: Slots/holes - as requested
- Flow rate 3 l/s
- Load capacity 2500kg
- Outlet position bottom horizontal
- Outlet pipe outside diameter 100mm

Typical applications: wherever there is a need for higher load capacity - general food processing, wine beverage, dairy, packaging etc.

Note floor finish to be specified

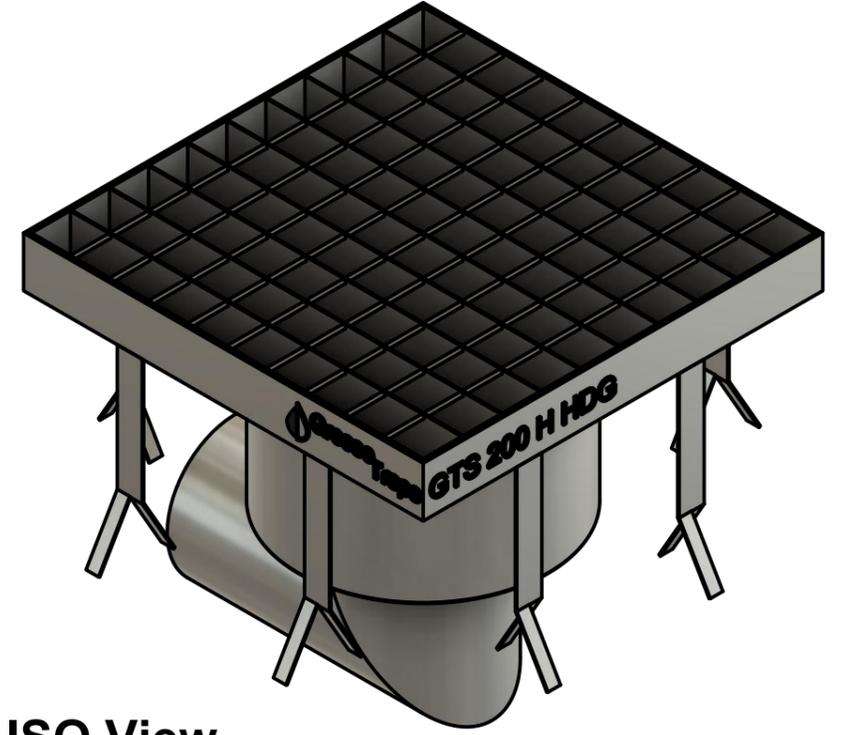

ISO View
Scale 1:4

Dept. KZN	Technical reference H Vorster	Created by W Louw	2017/11/19	Approved by H Vorster	2017/11/19
		Document type Genarel Arrangement	Document status Approved		
		Title GTS 200 H HDG www.greasetraps.co.za JHB KZN CPT	DWG No. GA-1000		
		Rev. A	Date of issue 2017/11/19	Sheet 1/1	