


GTS 200 H Floor Drain

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Top flange type: round (for epoxy floors) or square (for tiled floors)
- Top cover plate type: Slots/holes - as requested
- Flow rete 3 l/s
- Load capacity 1000kg
- Outlet position bottom horizontal
- Outlet pipe outside diameter 100mm

Typical applications: restaurants, steakhouses, kitchens, dining halls, horse stables, pigsties, nursing homes etc.

Note floor finish to be specified

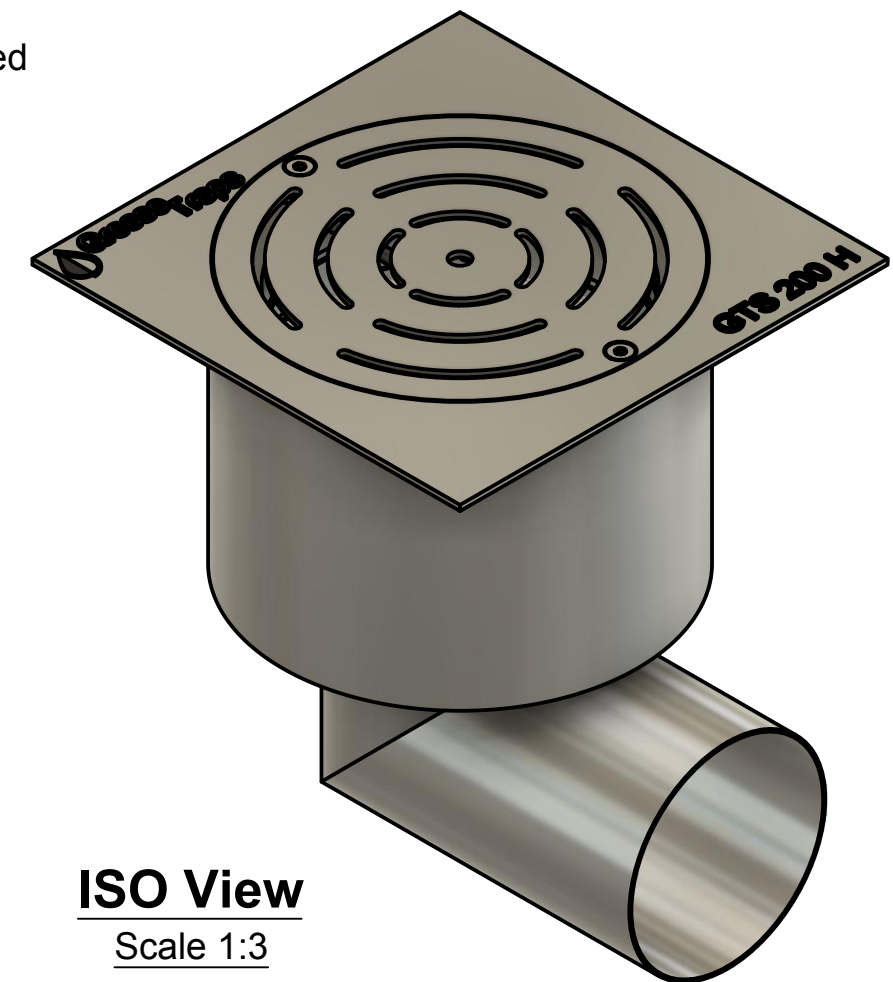

Dept. KZN	Technical reference H Vorster	Created by W Louw	2017/12/05	Approved by H Vorster	2017/12/05
		Document type General Arrangement	Document status Approved		
		Title GTS 200 H www.greasetraps.co.za JHB KZN CPT	DWG No. GA-1000		
		Rev. A	Date of issue 2017/12/05	Sheet 1/1	