


Front View

Scale 1:4
240

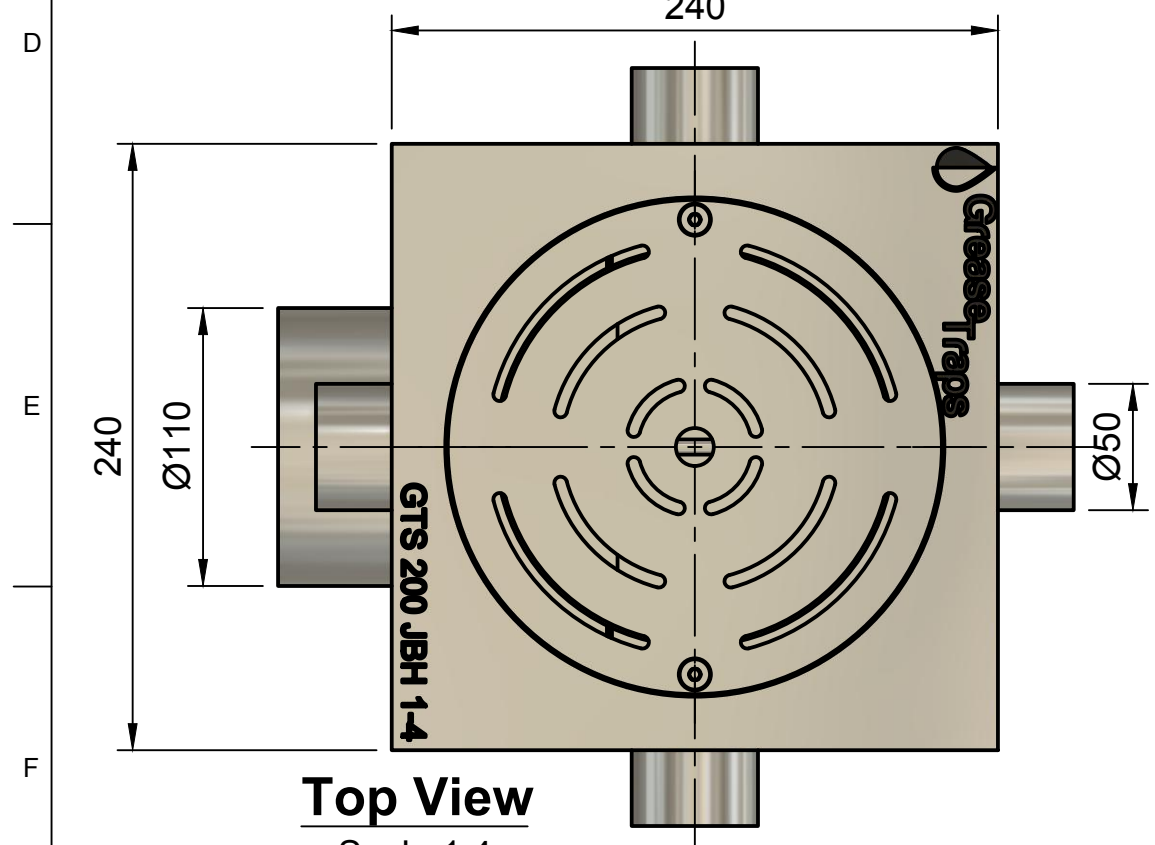

Top View

Scale 1:4


GTS 200 JBH Floor Drain with 1-4 side inlets

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A single water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Grating frame type: square
- Top cover plate type: Slots/holes - as requested
- Extension for side inlets: 1, 2, 3 or 4 inlets
- Flow rate 3 l/s
- Load capacity 1000kg
- Outlet position bottom horizontal
- Outlet pipe outside diameter 100mm


Typical applications: restaurants, steakhouses, kitchens, dining halls, horse stables, pigsties, nursing homes etc.

Note floor finish to be specified

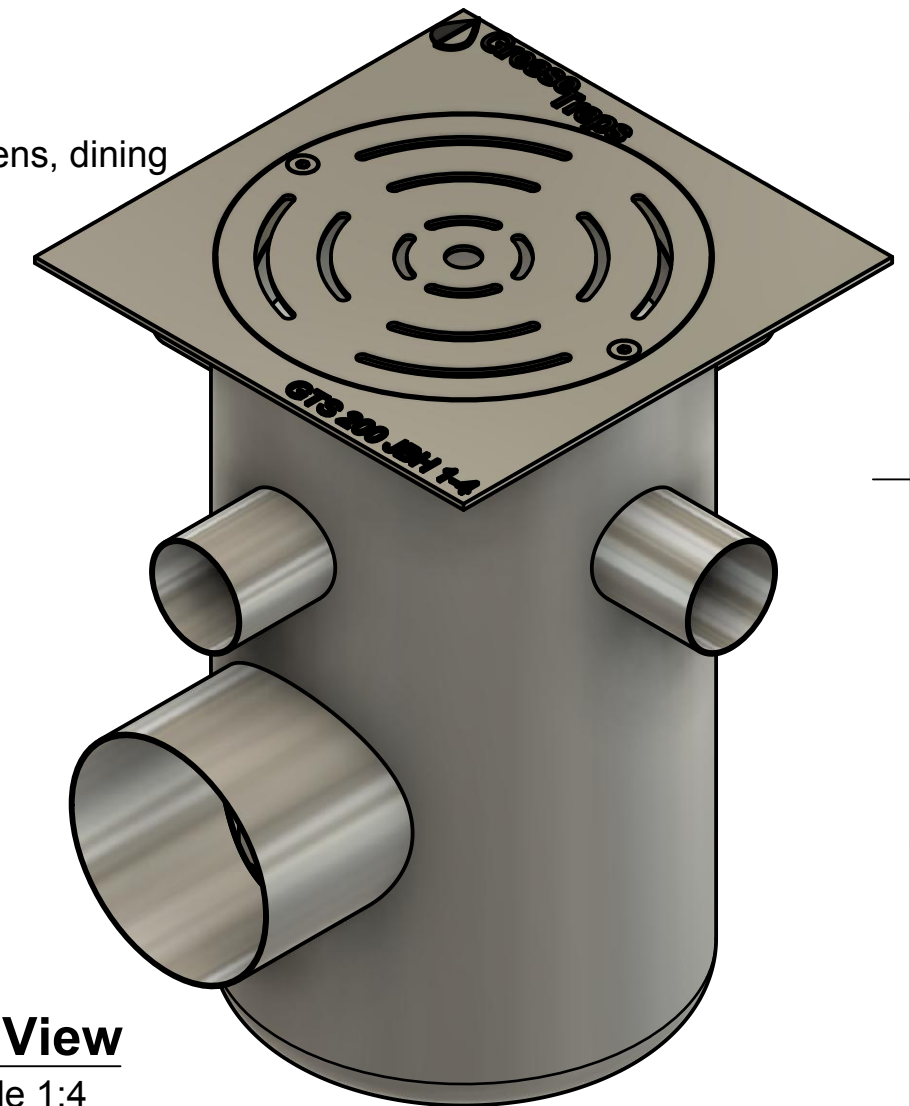

ISO View

Scale 1:4

Dept. KZN	Technical reference H Vorster	Created by W Louw 2017/11/22	Approved by H Vorster 2017/11/22
		Document type General Arrangement	Document status Approved
		Title GTS 200 JBH 1-4 www.greasetraps.co.za JHB KZN CPT	DWG No. GA-1000
		Rev. A	Date of issue 2017/11/22
		Sheet 1/1	