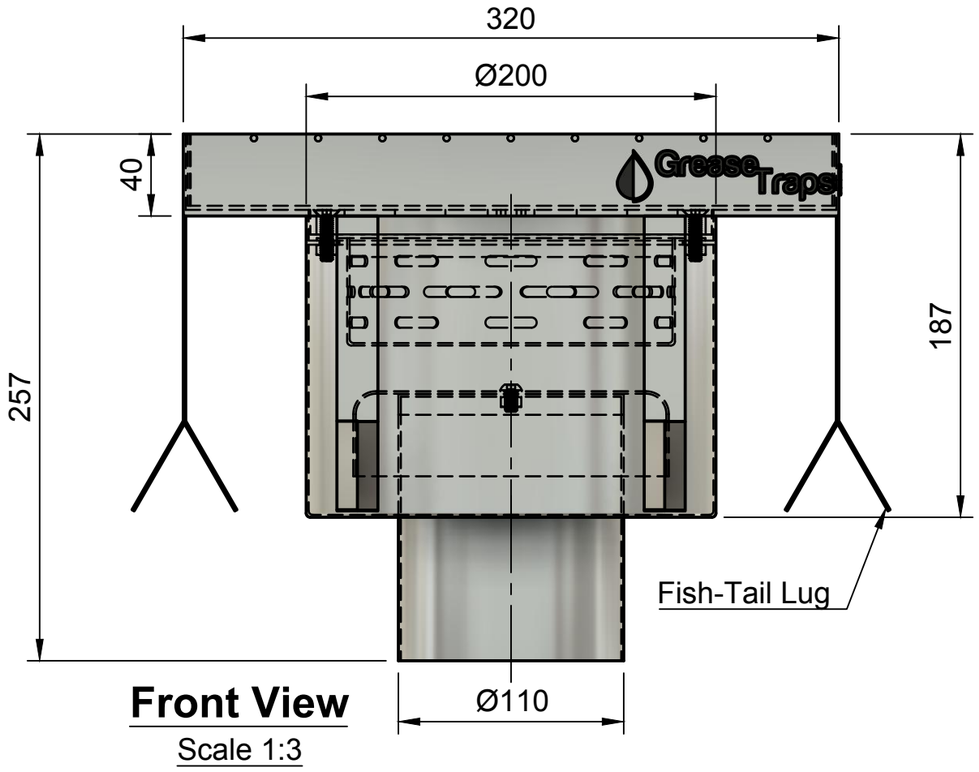

Front View

Scale 1:3

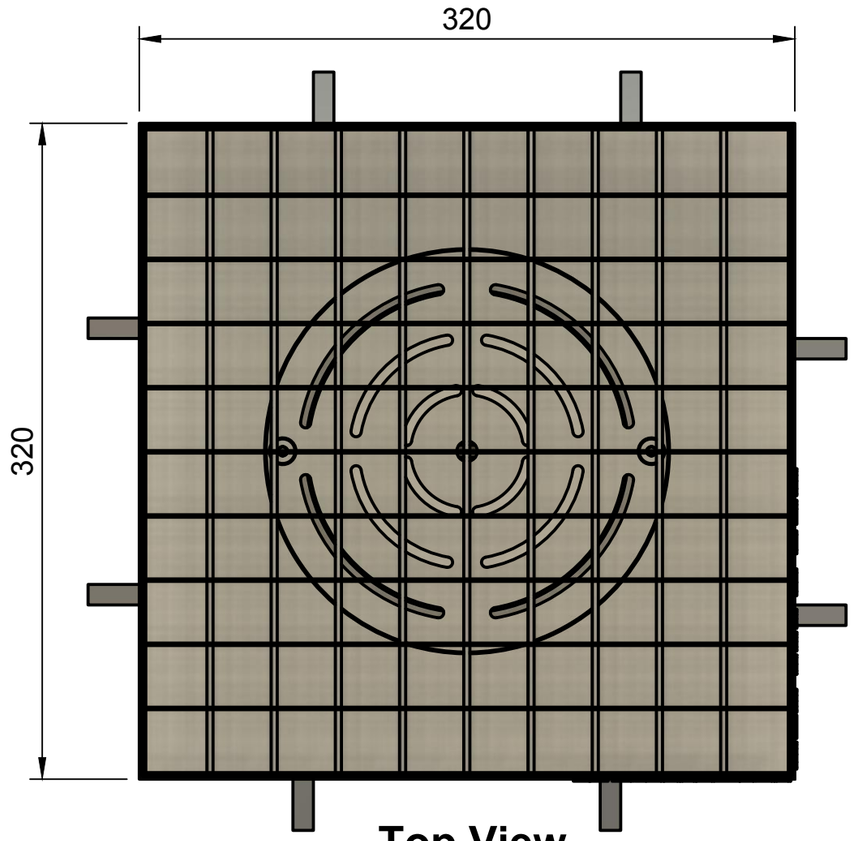

Top View

Scale 1:3

GTS 200 V Heavy Duty Floor Drain with Grating

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Grating frame type: square
- Top cover plate type: Slots/holes - as requested
- Flow rete 3 l/s
- Load capacity 2500kg
- Outlet position bottom vertical
- Outlet pipe outside diameter 100mm

Typical applications: wherever there is a need for higher load capacity - general food processing, wine beverage, dairy, packaging etc.

Note floor finish to be specified

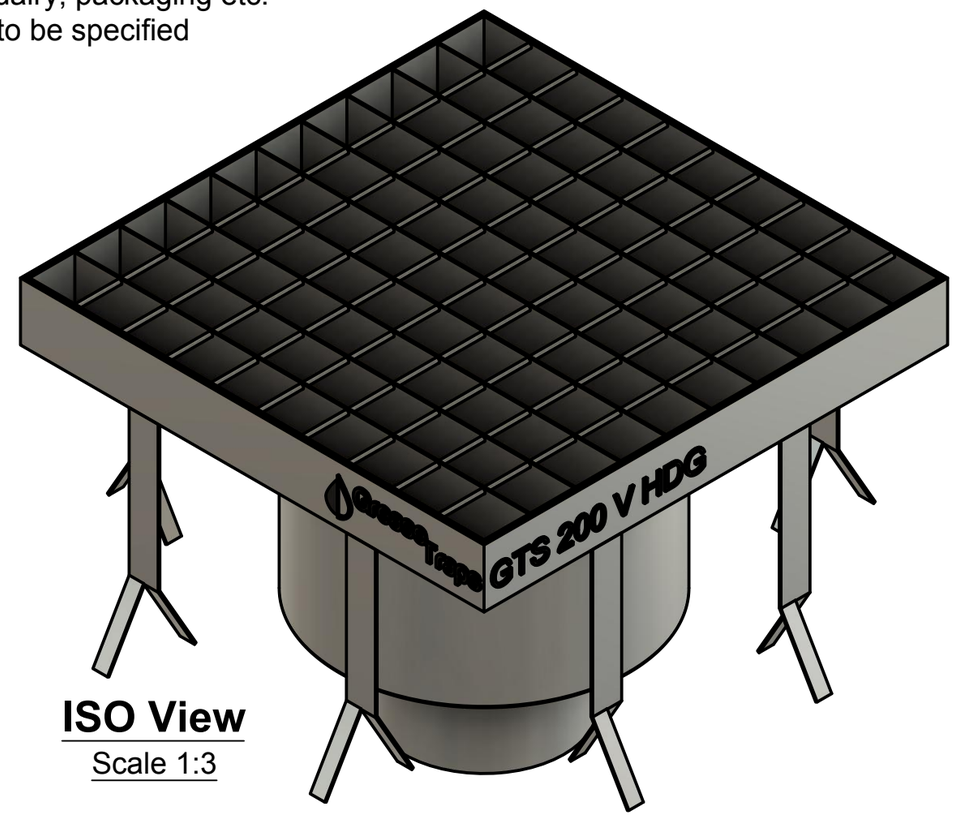

ISO View

Scale 1:3

Dept.	Technical reference	Created by	Approved by
KZN	H. Vorster	W. Louw 2017/11/18	H. Vorster 2017/11/18
		Document type: General Arrangement	Document status: Approved
		Title: GTS 200 V HDG www.greasetraps.co.za JHB KZN CPT	DWG No.: GA-1000
			Rev.: A; Date of issue: 2017/11/18; Sheet: 1/1

Grease Traps
Enviromentally Friendly