


GTS 200 VS with 1-4 Side Inlets


Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Top flange type: round (for epoxy floors) or square (for tiled floors)
- Top cover plate type: Slots/holes - as requested
- Extension for side inlets: 1, 2, 3 or 4 inlets
- Flow rate 3 l/s
- Load capacity 1000kg
- Outlet position bottom vertical
- Outlet pipe outside diameter 100mm

Typical applications: restaurants, steakhouses, kitchens, dining halls, horse stables, pigsties, nursing homes etc.

Note floor finish to be specified

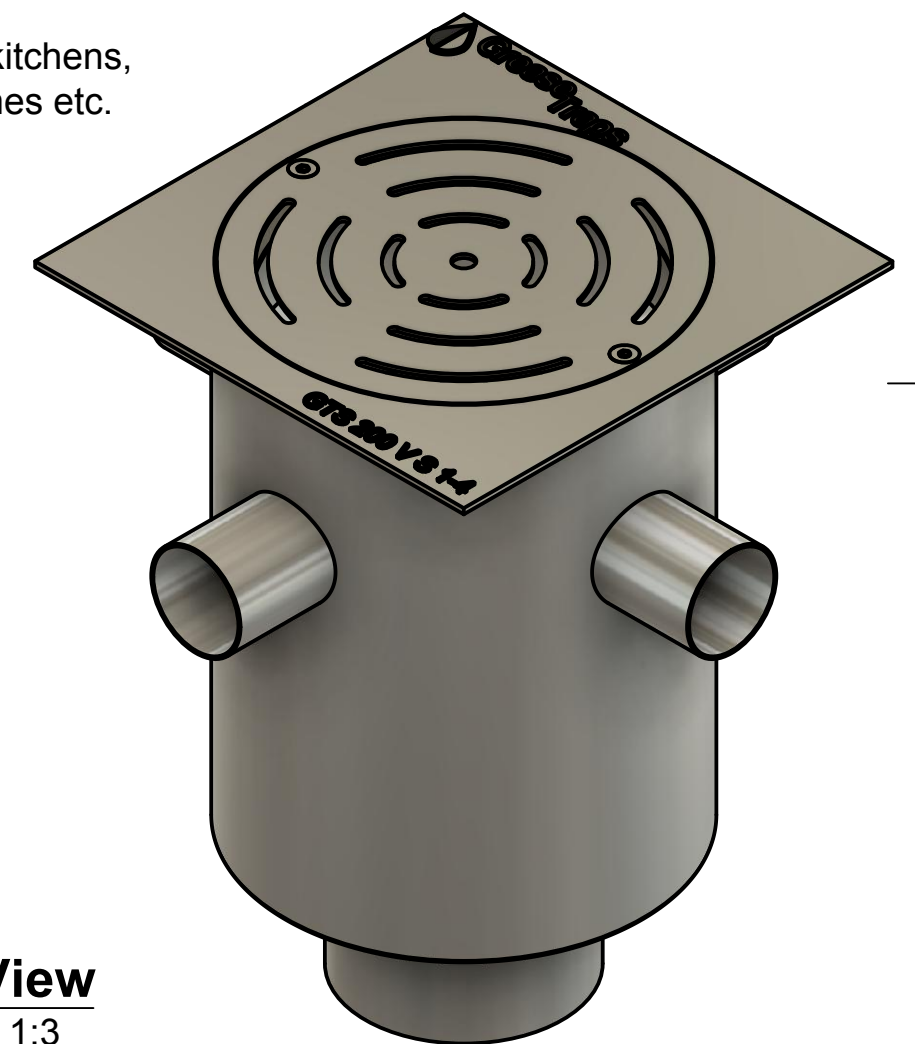

Dept. KZN	Technical reference H. Vorster	Created by W. Louw 2017/11/17	Approved by H. Vorster 2017/11/17
		Document type General Arrangement	Document status Approved
		Title GTS 200 VS 1-4 www.greasetraps.co.za JHB KZN CPT	DWG No. GA-1000
		Rev. A	Date of issue 2017/11/17
		Sheet 1/1	