


**Front View**

Scale 1:3

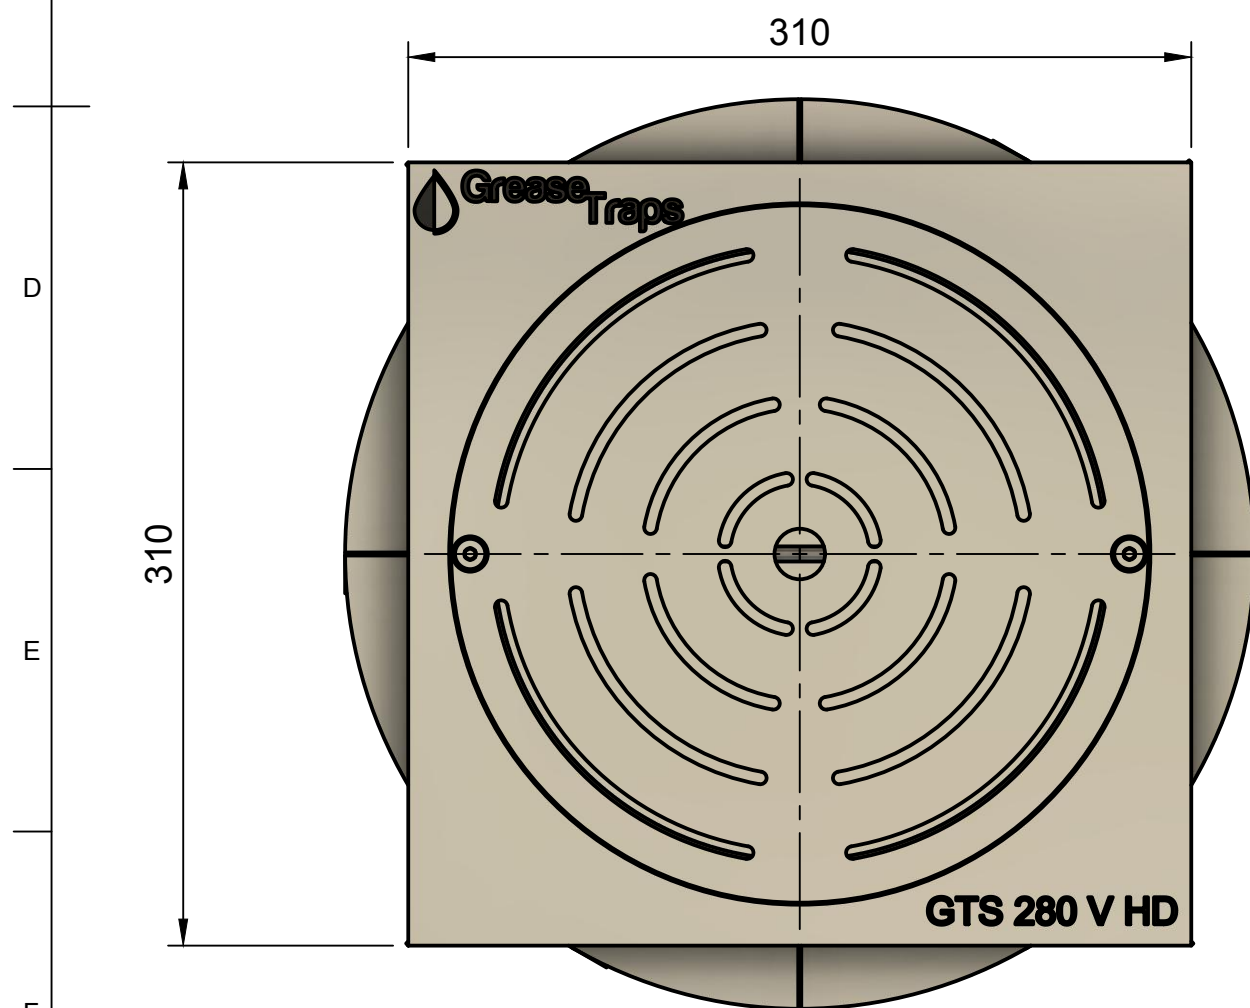

**Top View**

Scale 1:3


### GTS 280 Heavy Duty Floor Drain

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Top flange type: round (for epoxy floors) or square (for tiled floors)
- Top cover plate type: Slots/holes - as requested
- Flow rete 4.5 l/s
- Load capacity 2500kg
- Outlet position bottom vertical
- Outlet pipe outside diameter 100mm

Typical applications: wherever there is a need for higher load capacity - general food processing, wine beverage, dairy, packaging etc.

Note floor finish to be specified

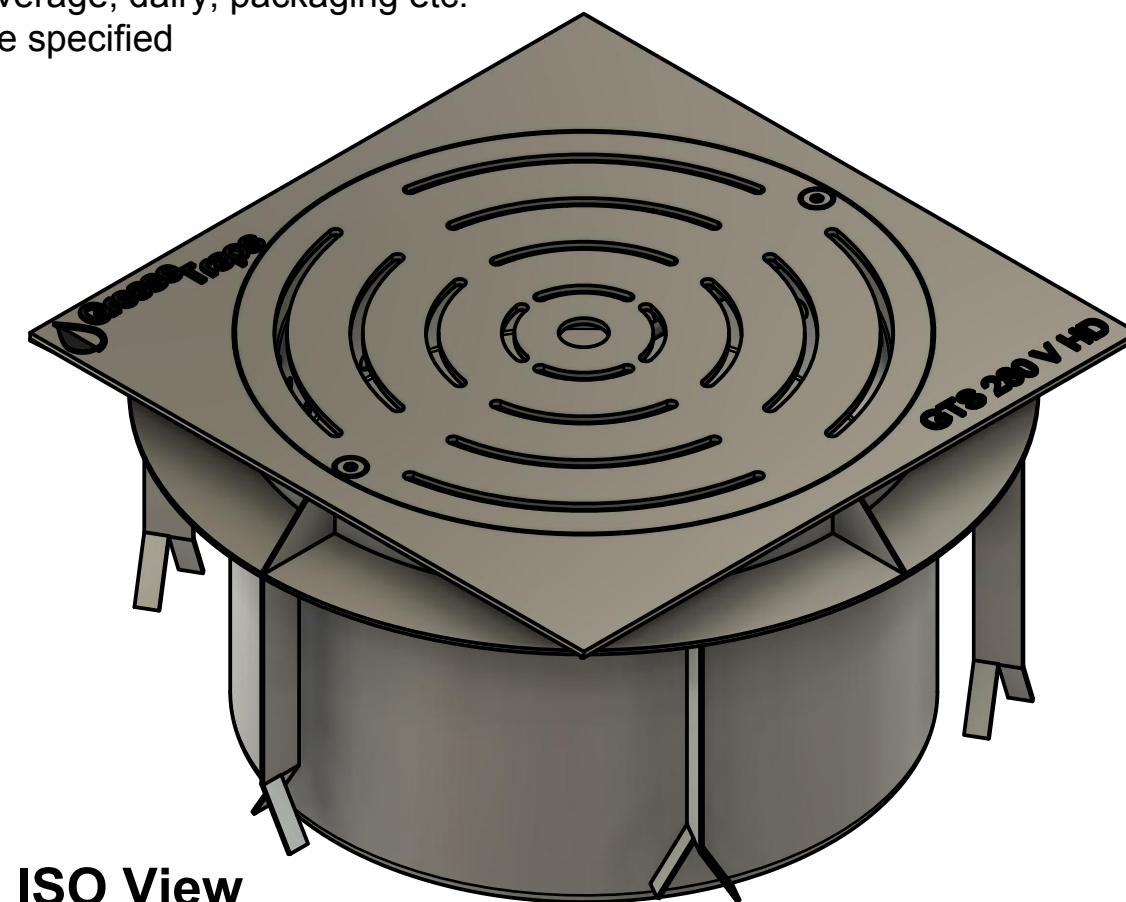

**ISO View**

Scale 1:3

Dept. KZN	Technical reference H Vorster	Created by W Louw 2017/11/23	Approved by H Vorster 2017/11/23
		Document type General Arrangement	Document status Approved
		Title GTS 280 V HD www.greasetraps.co.za JHB KZN CPT	DWG No. GA-1000
		Rev. A	Date of issue 2017/11/23
		Sheet 1/1	