


Front View

Scale 1:4

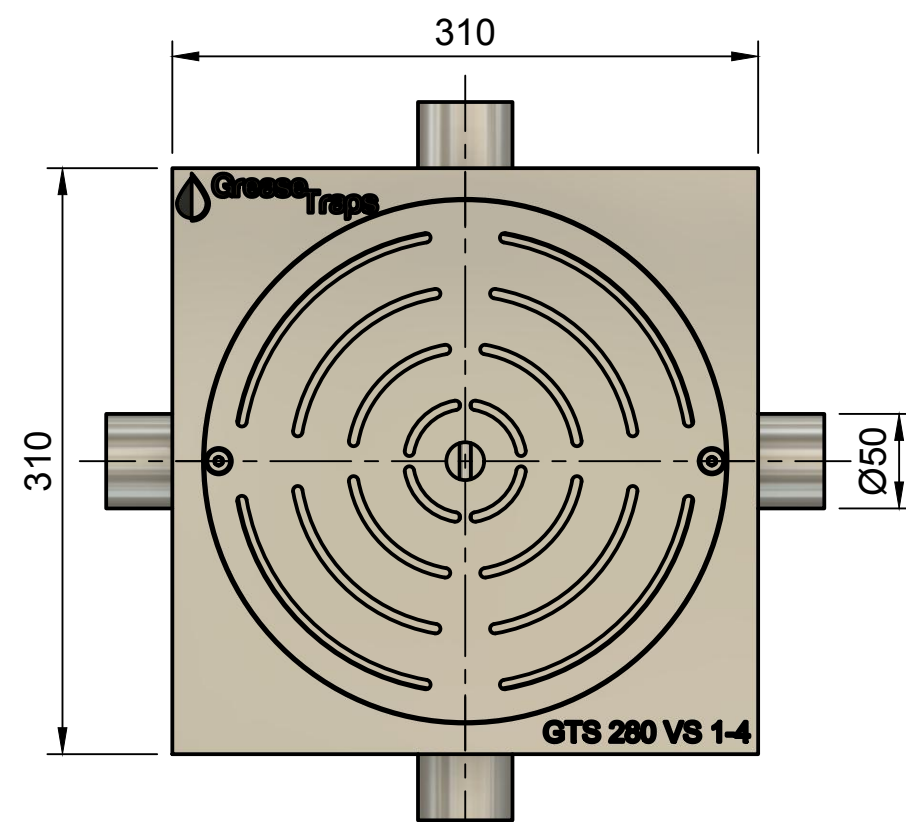

Top View

Scale 1:4


GTS 280 V Floor Drain With 1-4 Side Inlets

Unique full flow floor trap with the following features

- Manufactured from stainless steel 304 to ensure acid corrosion and stain resistance.
- A double water seal to ensure odour-free operation.
- Smooth surfaces for easy cleaning, minimum dirt collection and high flow rates.
- A large sludge box which retains all the coarse slurry
- Easy to dismantle
- The discharge pipe is fully accessible once the drain has been dismantled.
- Grating frame type: square
- Top cover plate type: Slots/holes - as requested
- Extension for side inlets: 1, 2, 3 or 4 inlets
- Flow rete 4.5 l/s
- Load capacity 1500kg
- Outlet position bottom vertical
- Outlet pipe outside diameter 100mm


Typical applications: general food processing, wine beverage, dairy, packaging etc.

Note floor finish to be specified

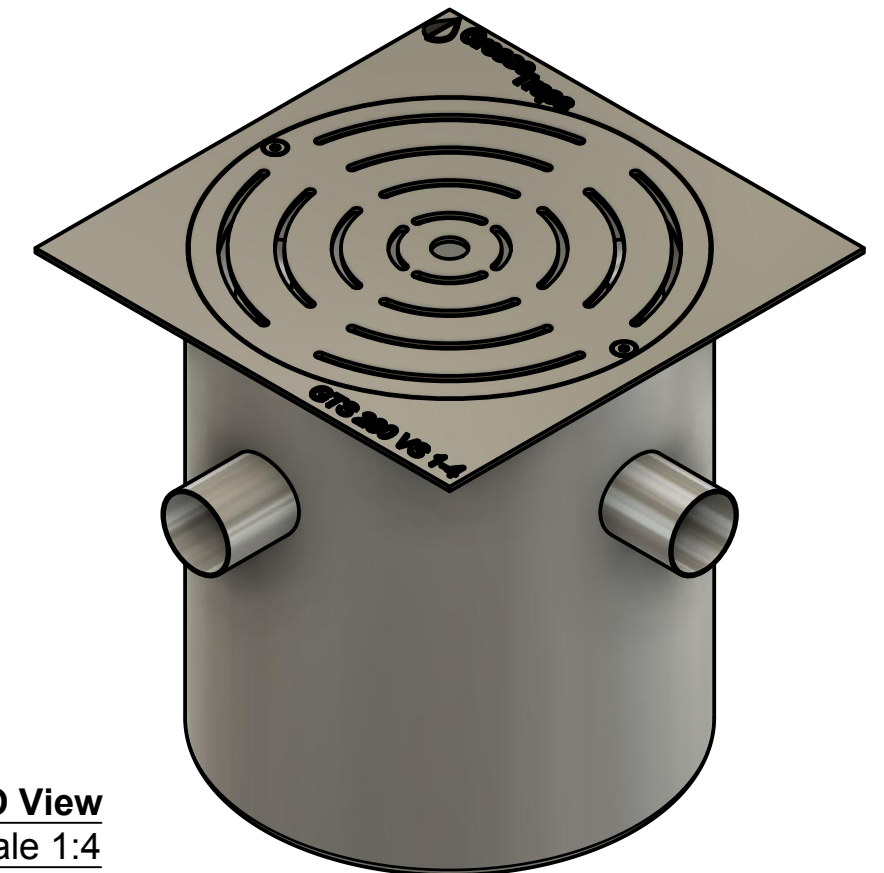

ISO View

Scale 1:4

| | | | | | |
|---|----------------------------------|---|-----------------------------|--------------------------|------------|
| Dept. KZN | Technical reference H Vorster | Created by W Louw | 2017/11/22 | Approved by H Vorster | 2017/11/22 |
|  | | Document type General Arrangement | Document status Approved | | |
| | | Title GTS 280 VS 1-4 www.greasetraps.co.za JHB KZN CPT | DWG No. GA-1000 | | |
| | | Rev. A | Date of issue 2017/11/22 | Sheet 1/1 | |