

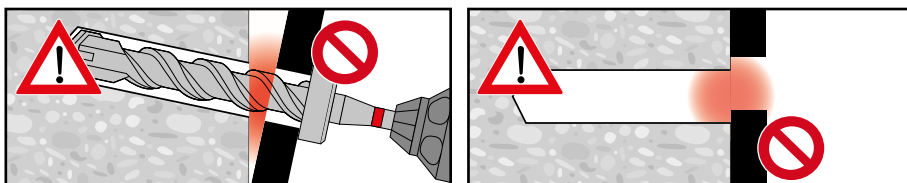
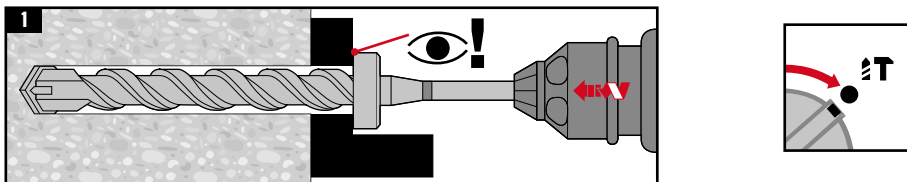
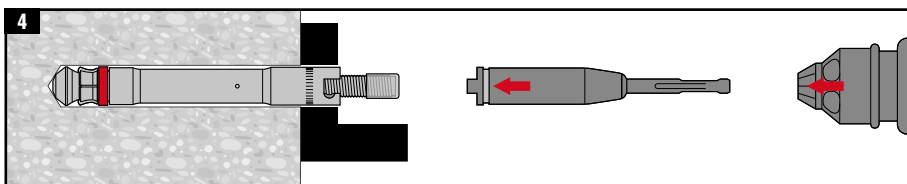


	HDA-T/TF/TR	max. t _{fix}	d _f
	HDA-T/TF/TR M16x190/40	40 mm	32 mm
	HDA-T/TF/TR M16x190/60	60 mm	32 mm

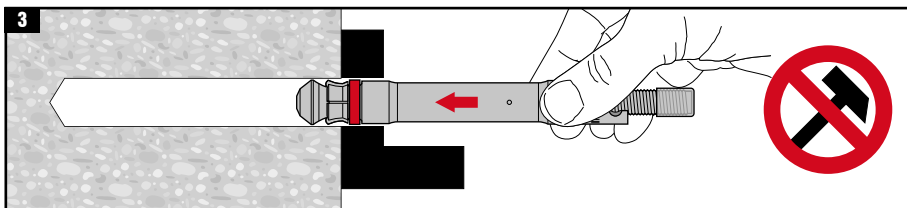


HDA-T/TF/TR	TE-Y (SDS max)
HDA-T/TF/TR M16 x 190/40	TE-Y-HDA-B 30 x 230
HDA-T/TF/TR M16 x 190/60	TE-Y-HDA-B 30 x 250

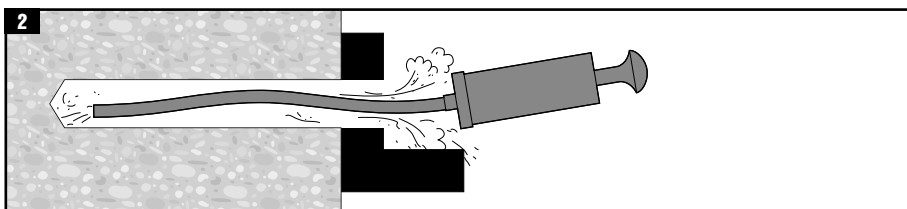

HDA-T/TF/TR	TE-Y (SDS max)
HDA-T/TF/TR M16	TE 70, TE 75, TE 76, TE 80

HDA-T/TF/TR	TE-Y (SDS max)
HDA-T/TF/TR M16	TE-Y-HDA-ST30-M16

		t _{setting}
TE 70		15 ... 30 sec (max. 60 sec)
TE 75		20 ... 40 sec (max. 60 sec)
TE 76		20 ... 40 sec (max. 60 sec)
TE 80		15 ... 30 sec (max 60 sec)

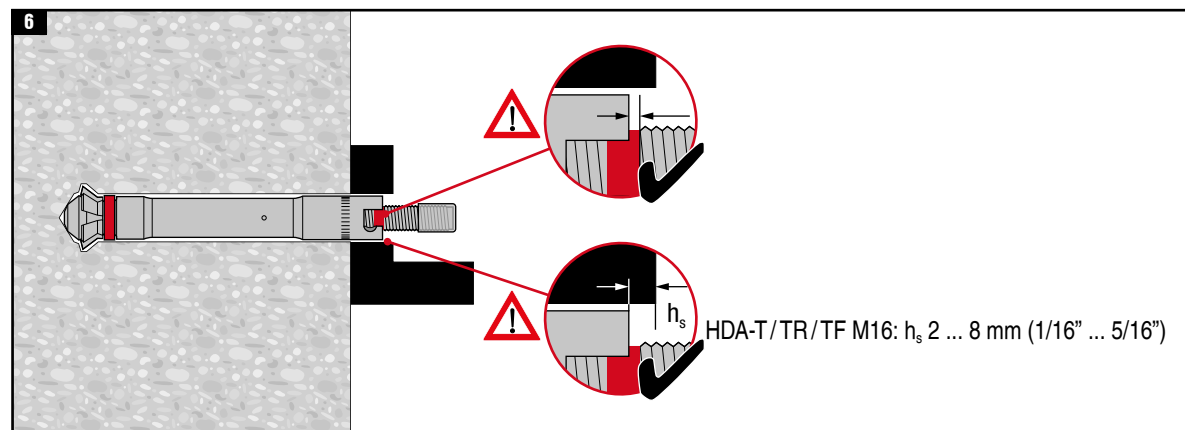

HDA-T/TF/TR	SW	T _{inst}
HDA-T/TF/TR M16	24	120 Nm (89ft-lb)