




# 5

## Edge trim possibilities (panel ends)

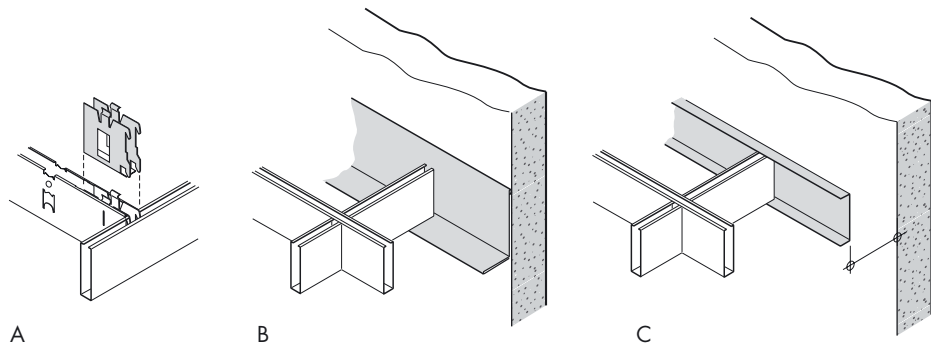

## Cutting the tiles

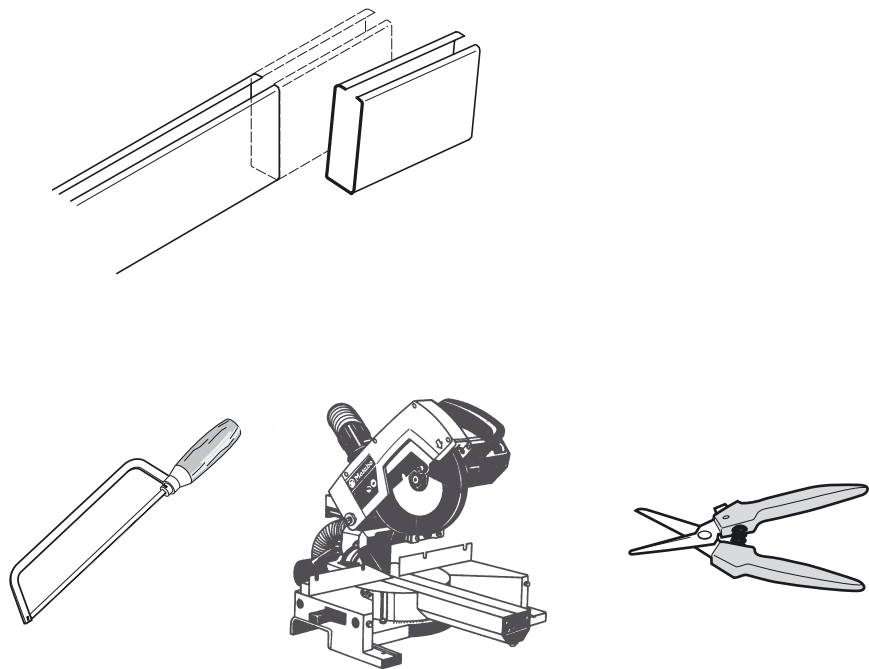

## Maintenance

Luxalon® Ceilings are, by utilising high quality materials and extensively tested coatings, easy to maintain. When cleaning is required, it is advised to use a slightly damp, non-linting and non-abrasive cloth. A mild neutral cleaning agent may be used if necessary. Never use aggressive cleaning agents since they will cause damage to the panels. Before cleaning the ceiling always try the chosen method of cleaning on a non-visible part of the panel.


### Ventilation

When using a Luxalon® Ceiling in rooms with higher humidity levels it is important always to use aluminium panels and carriers and to ensure that the rooms are ventilated properly.



[www.hunterdouglascontract.com](http://www.hunterdouglascontract.com)

## Luxalon® Open Cell Ceiling 22, 40 and 50(E)

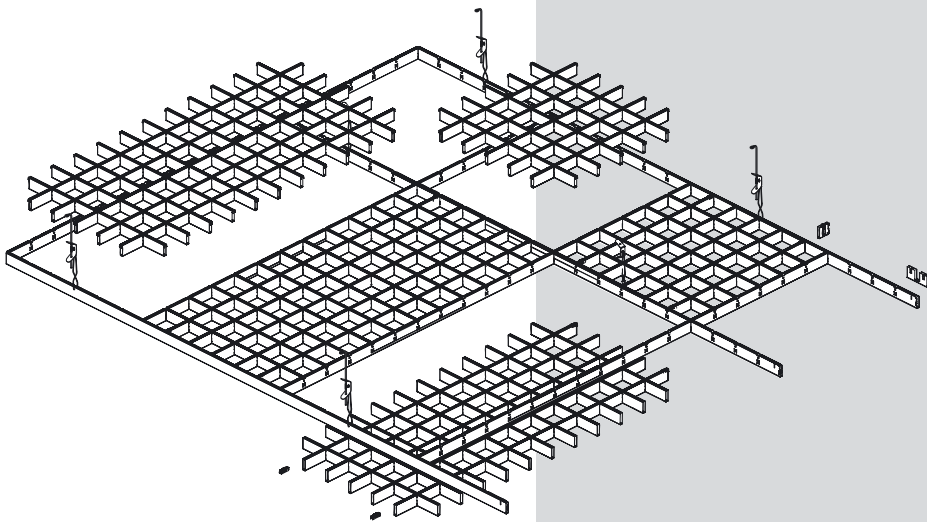

We have endeavoured to design these instructions to assist a trained ceiling professional with the mounting and installation of a Luxalon® ceiling. We accept no responsibility for poor workmanship, failure to comply with these instructions, improper installation or installation by someone other than a trained ceiling professional.

revision 1

**HunterDouglas**


WINDOW COVERINGS | CEILINGS | SUN CONTROL | FAÇADES

**HunterDouglas**

CEILINGS

# 1


## Marking suspension points

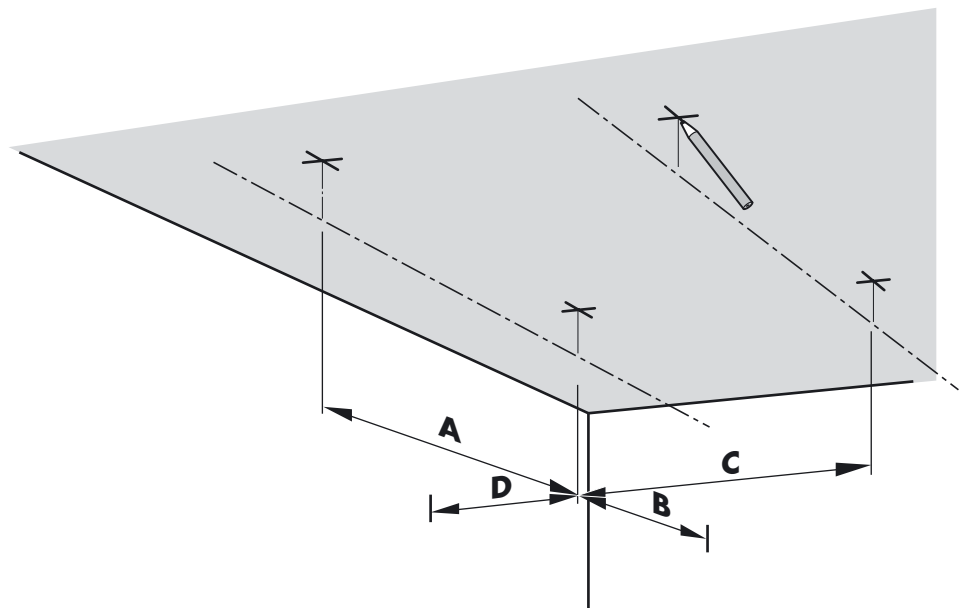

Type	Carrier span		Panel span	
	A	B	C max.	D max.
Cell 22	900	300	600/1200	600/1200
Cell 40, 50(E)	1200	300	600/1200	600/1200




# 2

## Installing the hangers

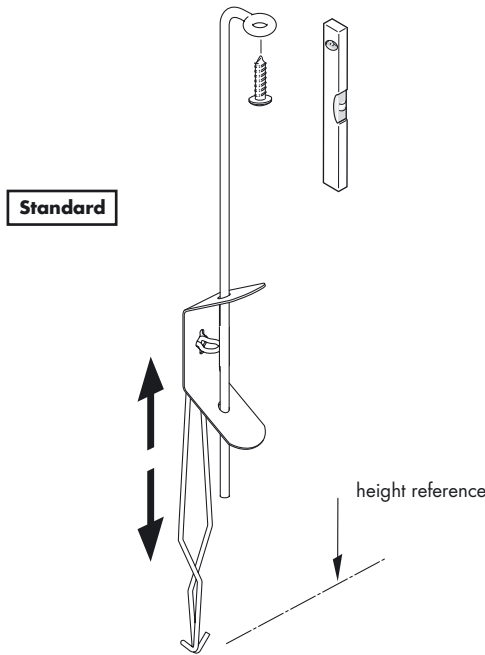




# 3

## Installing the carriers

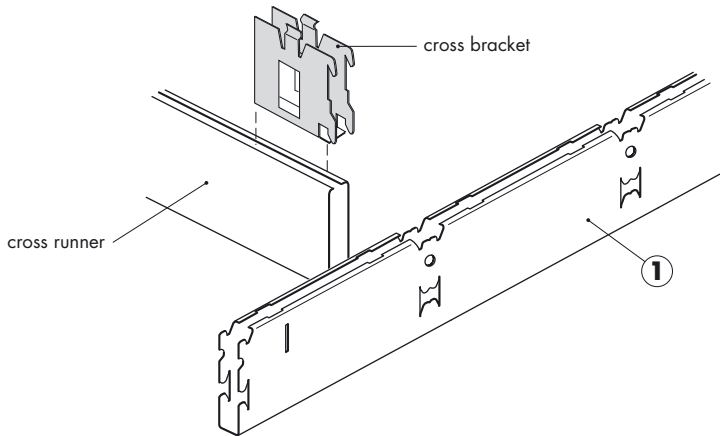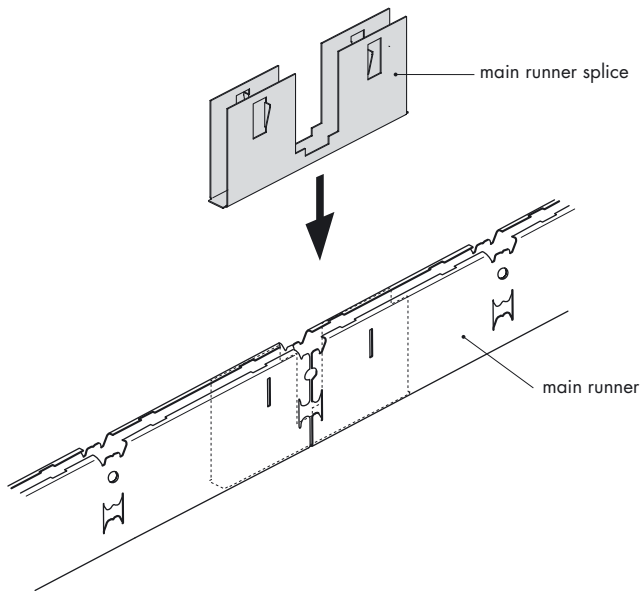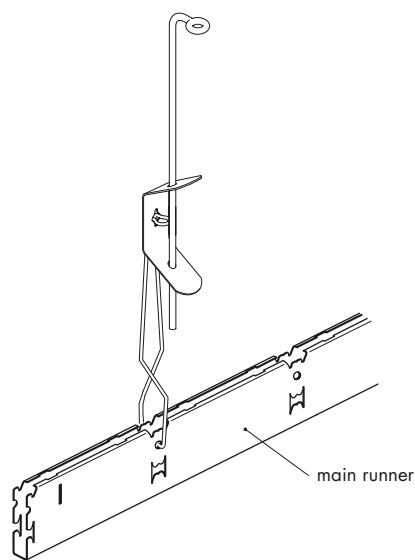

# 4

## Installing the tiles

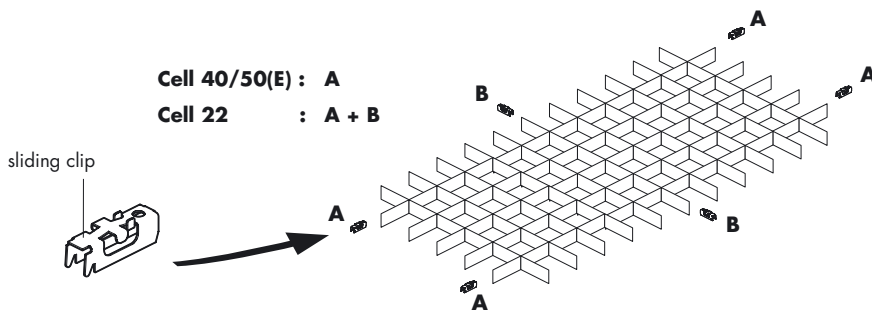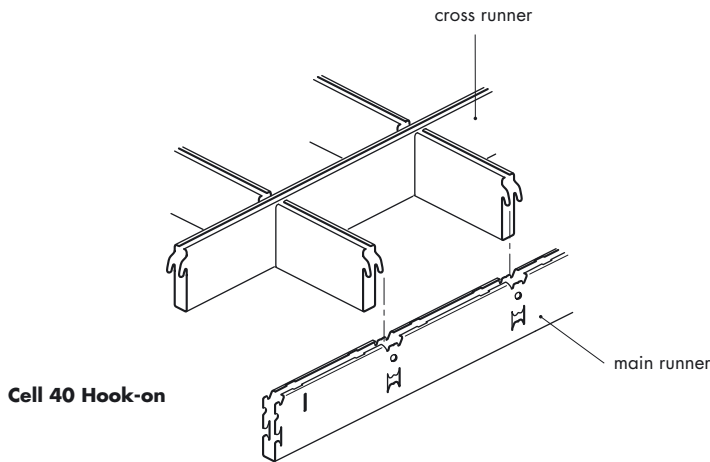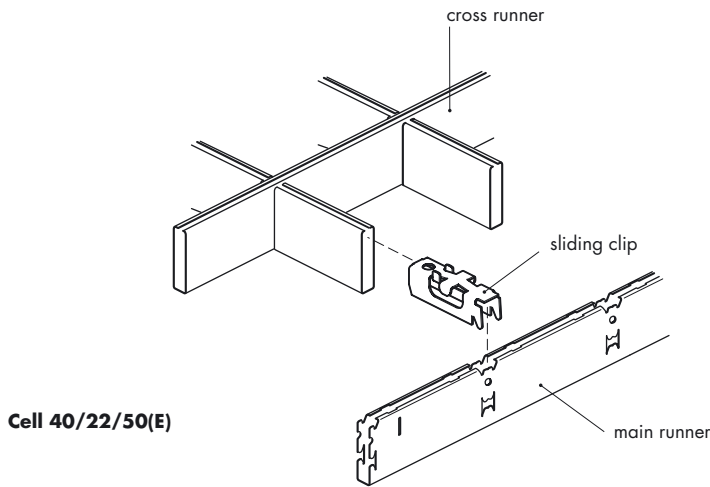

### ATTENTION!

To avoid fingerprints and damages, always wear (white) cotton **gloves** when handling the panels.

Make sure that:  
- Cut-outs in the panels for spots and other installations are made before installing the panels.