



# Cineplex

## Glasswool: A tissue-faced acoustic ceiling tile

### DESCRIPTION

Cineplex ceiling tiles are manufactured from non-combustible inorganic Glasswool and bonded with an inert thermosetting resin binder. The tile is faced with a black non-woven glass tissue for optimal sound absorption.

### QUALITY MANAGEMENT SYSTEM

ISOVER products are manufactured according to ISO 9001:2008.

### ENVIRONMENTAL SUSTAINABILITY

ISOVER products are manufactured according to ISO 14001:2004.

Less material, less energy and less emissions

- Zero ozone depleting potential (ODP)
- Zero global warming potential (GWP)

### FEATURES & BENEFITS

- Lightweight and easy to handle
- Exceptional acoustic properties
- Good thermal resistance values
- Safe application and use
- Will not sag when correctly installed

### FIRE PROPERTIES

- Non combustible tested to SANS 10177-5

### THERMAL PROPERTIES

Contributes to indoor comfort and contributes to lifelong savings by reducing heat loss/gain due to the inherent thermal insulation properties.

### ACOUSTIC PROPERTIES


Offers exceptional acoustic properties and enhances indoor environmental quality by absorption of noise. Reduces sound transmission to and from a room or building.

### APPLICATIONS

Suspended ceilings in commercial buildings such as cinemas.

### DURABILITY

- Odourless, inert and fully compatible with all standard building materials and components
- Will not sustain vermin
- Will not breed or promote fungi, mould or bacteria
- Non-hygroscopic
- Dust settlement will not hamper the product's performance

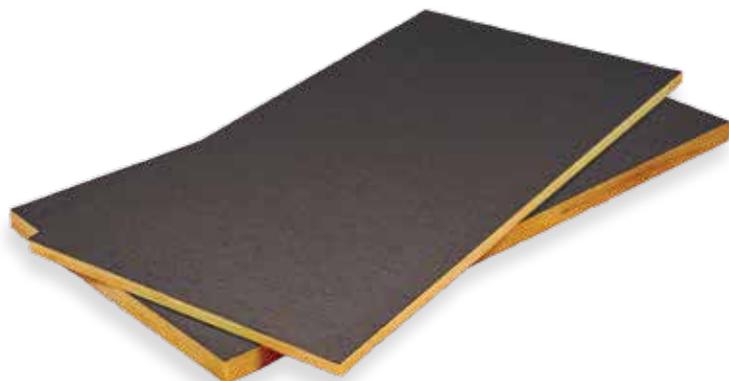

# Cineplex

## PHYSICAL PROPERTIES

Rval (m <sup>2</sup> .K/W)	Thickness (mm)	Length (mm)	Width (mm)	k-value (W/m.K)	Qty/box
1.25	40	595	595	0.032	20
1.25	40	1195	595	0.032	10

Typical values

Thickness (mm)	Installation	Noise Reduction Coefficient (NRC val)	Sound Absorption Coefficient (Frequency in Hz)				
			125	250	500	1000	2000
40	Without Plenum	0.8	0.19	0.38	0.75	0.95	1.03
40	300mm Plenum	0.9	0.74	0.80	0.79	0.98	1.01

Typical values

## TOOLS NEEDED FOR INSTALLATION

Cineplex panels are designed to fit standard grid systems. Hold down clips are provided to secure ceiling tiles in the grid system. A sharp knife/blade to be used for trimming/sizing of panels.

## INSTALLATION INSTRUCTIONS & PRECAUTIONS

1. Cineplex acoustical ceiling tiles are laid in a suspended ceiling grid system and, where instructed by the architect, secured by means of hold down clips as supplied by ISOVER.
2. The contractor is to take care when installing the tiles to ensure that the facings are kept free from dust and grime, finger-marks or any other possible blemish or damage.
3. No damaged tiles are to be installed and extreme care is to be taken when further work is carried out on the ceiling (e.g. installation of the light fittings).
4. Any light fitting, fan or any other fixture is to be independently secured by whatever means required and should not rest on the ceiling tile so as not to put any pressure on the tile whatsoever.
5. The ceiling grid is to be laid out as per the manufacturer's instructions.

## HANDLING & STORAGE

Store product under cover and in dry conditions. Handle with care, especially on the edges and corners, which can be damaged if subject to sharp or heavy impact. Do not apply excessive pressure, for example by standing or sitting on the product, as permanent damage may be caused.

## ARCHITECTURAL SPECIFICATION

Install 40mm thick "Cineplex" acoustic suspended ceiling tiles with T-sections, hangers, hold down clips etc. Installation strictly in accordance with manufacturer's detail and specification.

ISOVER reserves the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Isover will endeavour to ensure publications are up to date, it is the users' responsibility to check with us that it is correct prior to use.