


## TOPIQ® Sound

■ TOPIQ® Sound provides the highest possible class A sound absorption with high humidity resistance and different coating options.

SYSTEM	■ C Exposed Grid System, demountable ceiling
Dimensions	■ 600 x 600 mm, 625 x 625 mm
Please note	■ The minimum quantities according to the price list!
Thickness / Weight	■ 40 mm (c. 6,0 kg/m²)
Colour	■ White similar to RAL 9010
Edge details	■ SK, VT-S 15/24





SK

VT-S 15/24

### TECHNICAL PERFORMANCE

Reaction to fire	■ A1 as per EN 13501-1
Sound absorption	■ EN ISO 354 $\alpha_W = 0,90$ as per EN ISO 11654 (Suspension height 200 mm) $NRC = 0,90$ as per ASTM C 423 (Suspension height 200 mm)  $\alpha_W = 1,00$ as per EN ISO 11654 (Suspension height 100 mm) $NRC = 1,00$ as per ASTM C 423 (Suspension height 100 mm)
Sound attenuation	■ $D_{n,t,w} = 35$ dB as per EN ISO 10848 (according test report, 40mm) $CAC = 34$ dB as per ASTM E413-10 (according test report, 40mm)
Sound attenuation	■ $R_w = 21$ dB as per BS EN ISO 717-1:2013 (according test report, 40mm)
Light reflection	■ For white similar to RAL 9010 glare-free approx. 88%
Humidity resistance	■ up to 100% relative humidity

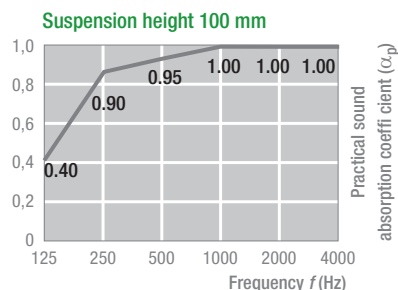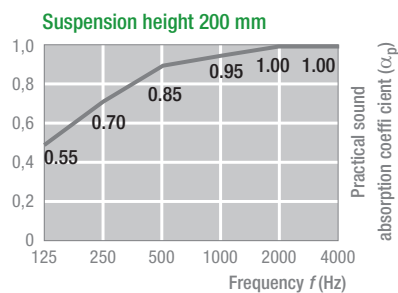

Knauf AMF GmbH & Co. KG  
 Elsenthal 15  
 D-94481 Grafenau  
 Phone +49 8552 / 422-0 - Fax +49 8552 / 422-30  
 info@knaufamf.com - www.knaufamf.com

Due to reproduction processes colours shown in this catalogue may differ from the actual product colour. Product selection should always be made from AMF samples. All details and technical information stated in this brochure or other publicity material referring to AMF ceiling systems are based on test reports obtained under laboratory conditions. It is the responsibility of the customer to ensure that this data is suitable for the proposed application. All information provided is based on current technical data. Further relevant test reports, assessments and installation guidelines are available. All system details conform with current standards and are based on the use of AMF products and system components. AMF accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data. Mixing of production batches is not recommended. All technical data is subject to change without prior notice and is governed by AMF Terms and Conditions of Sales. This catalogue supersedes all previous editions. Errors and omissions excepted. Printing errors excepted.