




# Mapecolor CPU

**Powdered pigment for colouring polyurethane-cement based products from the Mapefloor CPU line**

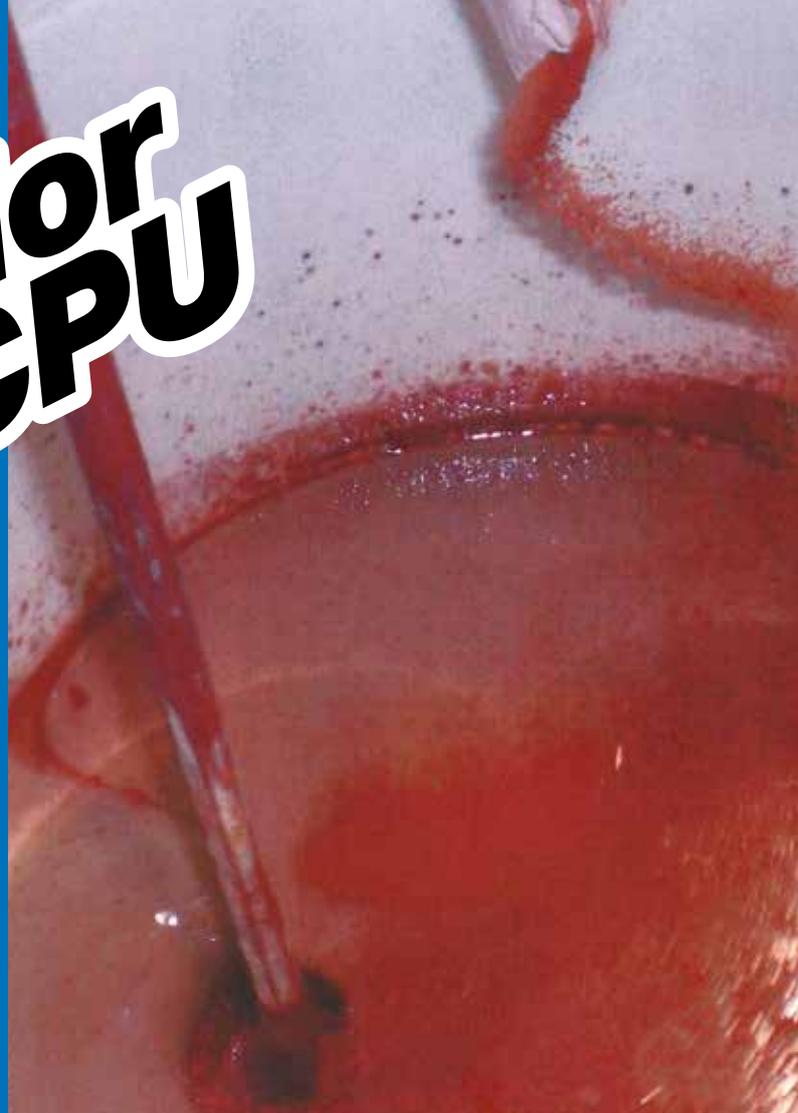

## WHERE TO USE

**Mapecolor CPU** is a powder containing pigments and selected aggregates and is used to colour the polyurethane-cement based products **Mapefloor CPU/RT**, **Mapefloor CPU/HD** and **Mapefloor CPU/MF**.

## HOW TO USE

**Mapecolor CPU** is added during the mixing phase of components A, B and C of products from the **Mapefloor CPU** line to obtain the colour required. Add **Mapecolor CPU** immediately after mixing components A and B. Mix to reach an homogeneous powder dispersion, then slowly add component C and mix again with an electric low-speed mixer to reach an even and homogeneous mortar. Total mixing time must be at least two minutes. Add one 5 kg bag of **Mapecolor CPU** for each complete kit of **Mapefloor CPU/RT**, **Mapefloor CPU/HD** or **Mapefloor CPU/MF**.

Do not mix partial quantities.

Do not apply **Mapefloor CPU/RT**, **Mapefloor CPU/HD** and **Mapefloor CPU/MF** without adding **Mapecolor CPU**.

For further technical details and information on how to apply **Mapefloor CPU/RT**, **Mapefloor CPU/HD** and **Mapefloor CPU/MF** refer to the relative Technical Data Sheet for each product.

## CONSUMPTION

Add one 5 kg bag of **Mapecolor CPU** for each kit (A+B+C) of **Mapefloor CPU/RT**, **Mapefloor CPU/HD** and **Mapefloor CPU/MF**.

## COLOURS AVAILABLE

Oxide red, green, ochre yellow, grey (RAL 7030) and beige (RAL 1001).

## PACKAGING

Boxes of four 5 kg bags.

## STORAGE

The product may be stored for 12 months if kept in its original packaging in a dry place at a temperature of +5°C to +30°C.

The product complies with the conditions of Annex XVII to Regulation (EC) N° 1907/2006 (REACH) - All. XVII, item 47.

## SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

**Mapecolor CPU** is an irritant containing cement that when in contact with sweat or other body fluids causes irritant alkaline reactions and allergic reactions to those predisposed. It can cause damage to eyes.

It is recommended to use protective gloves and goggles and to take the usual precautions for handling chemicals. If the product comes in contact with the eyes or skin, wash immediately with plenty of water and seek medical attention.

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

## WARNING

*Although the technical details and recommendations*

TECHNICAL DATA (typical values)				
<b>PRODUCT IDENTITY</b>				
<b>Consistency:</b>	powder			
<b>Colour:</b>	oxide red, green, ochre yellow, grey (RAL 7030) and beige (RAL 1001)			
<b>Bulk density (g/cm<sup>3</sup>):</b>	1.35 ÷ 1.45			
<b>Mixing ratio with the various components:</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>Mapecolor CPU</b>
<b>Mapefloor CPU/MF:</b>	5.2	5.4	20.0	5
<b>Mapefloor CPU/RT:</b>	2.6	2.7	18.0	5
<b>Mapefloor CPU/HD:</b>	2.6	2.7	20.5	5

*contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.*

**Please refer to the current version of the Technical Data Sheet, available from our website [www.mapei.com](http://www.mapei.com)**

**All relevant references for the product are available upon request and from [www.mapei.com](http://www.mapei.com)**

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

**6764-7-2015 (GB)**