

Siniat System Summary



Siniat Firecheck Wall 64/F60 A40

Components:	System weight (kg/m ²)	Max height (m)	Overall Thickness (mm)	Fire perf (mins)	Acoustic Perf. (R _w -dB)
<ul style="list-style-type: none">• 1x15mm Siniat Firecheck T/E Plasterboard• 64mm Drywall steel stud• 65mm Drywall steel track• Siniat Drywall jointing compound• 25mm Drywall Screws• Floor and ceiling finishes as per specification	23	3.6	94	60	40

Specifications

Siniat Fixed Partition: 94mm


Supply and install Siniat Fixed Partition from Siniat drywall partitioning system with an overall thickness of 94mm comprising internal framing formed of 64mm Siniat galvanised steel studs fixed at 600mm centers to Siniat galvanised steel top track positioned at floor, head and walls.

The internal steel framing is to be dressed on both sides with 12mm thick Siniat Plasterboard in single layer to suit height, butt jointed and secured to steel stud with 25mm drywall screws at maximum 220mm centers. Joints are to be taped and jointed with Siniat Jointing Compound and Siniat fibatape and prepared for painting.

All external aluminium door frames, glazing frames, ceiling and wall channels and skirting are to be formed of natural anodized / colour anodized / powder coated to specific colour.

Maximum Height: 3600mm

Installation to be in accordance with SABISA (South African Building Interior Systems Association) installation guidelines.

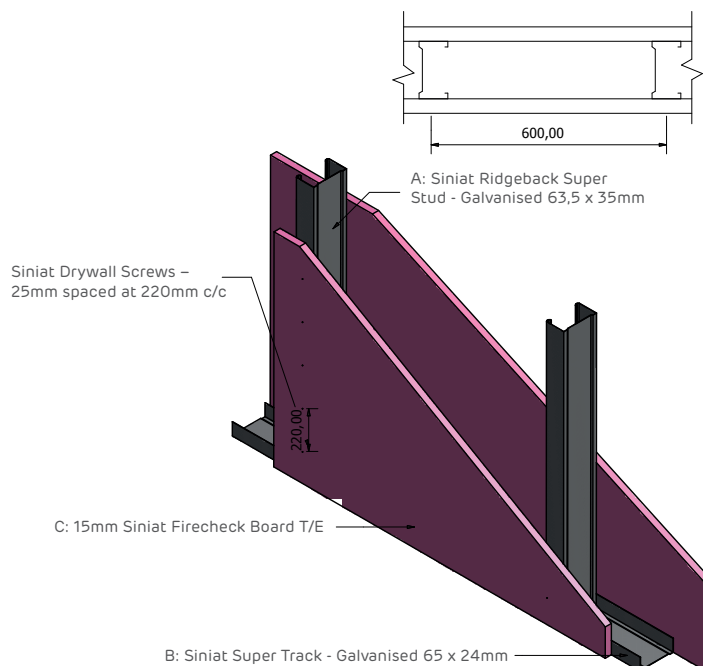

Tel: (+27 11) 389 4500

Email: contactus.mbs@etexgroup.com

www.marleybuildingsystems.co.za