


# Marmoran

The Architects' Choice

## BRUSHCOAT

A MATT TEXTURED ACRYLIC TOPCOAT FOR RESIN BONDED PLASTERS AND TEXTURED COATINGS

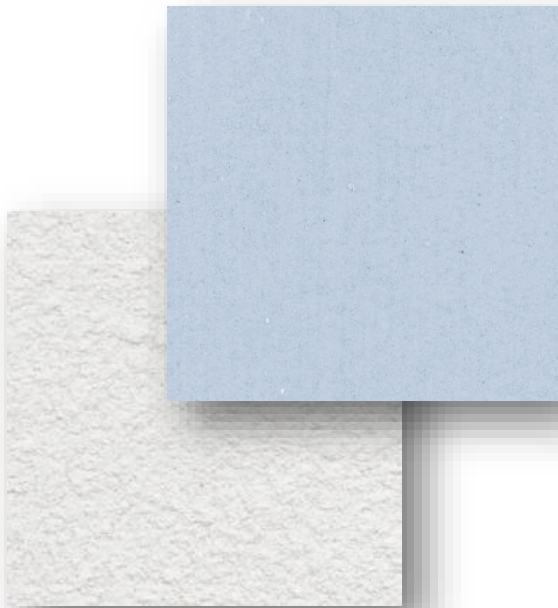

### PRODUCT INFORMATION

Marmoran Brushcoat is a textured acrylic topcoat designed to be used on Marmoran Plaster and Textured Coatings where the coating has been soiled or damaged.

On a small area the Brushcoat must be feathered onto the affected area and large areas must be done from corner to corner.

### FEATURES & BENEFITS

- extremely tough and durable
- outstanding flexible qualities
- superior alkali resistance
- excellent weather and ultraviolet resistance
- controlled water vapour permeability enabling the substrate to "breathe"
- superior adhesion to all suitably primed substrates
- excellent impact and abrasion resistance
- rapid drying properties in both low and high temperatures
- water-based, low odour
- non-hazardous, non-toxic, environment friendly
- **VOC LEVEL - 0 g/L**



SA National Enquiries: 0861 627 266

[www.marmoran.co.za](http://www.marmoran.co.za)

B-BBEE COMPLIANT

© COPYRIGHT 2008:

No part of this document may be reproduced by any means unless express written permission has been granted by MARMORAN (Pty) South Africa.

International enquiries: +27 21 797 4250

Email: [info@marmoran.co.za](mailto:info@marmoran.co.za)

11.12.2019

# Marmoran

The Architects' Choice

## BRUSHCOAT

PRODUCT CODE AS020

PRODUCT DATA INFORMATION SHEET

### USES

- Designed for interior and exterior use as a brushcoat over all Marmoran Plaster and Textured coatings where good obliteration and texture is required.
- **There could be a colour variation between the original product and the Brushcoat due to the differing sheen levels of the product types.**

**COLOUR** Tinted to a wide selection of colours.

**PACKAGING** 5 & 20 Liter containers. Made to order.

### GENERAL CONSIDERATION REGARDING APPLICATION

#### CLIMATIC CONDITIONS

Adequate protection should be provided against rain and sub-zero temperatures for a period of not less than 24 hours after application. The coating should never be applied during adverse weather conditions, or on wet surfaces. Even if the weather seems fit for painting, there may be condensation if the temperature of the substrate is at or below the dew point (temperature at which the atmospheric humidity condenses e.g. as dew) the product should only be applied when the temperature of the substrate is at least 2 deg C above dew point. In hot climates, the coating should be applied during the morning and late afternoon hours and if possible away from direct sunlight. Variations in temperatures will affect drying times.

**APPLICATION** Ready for use – do not dilute.  
Ensure that the substrate is dry, clean and sound.

#### FOR PATCHING PURPOSES

A dry brush method with a minimal amount of Brushcoat on the brush must be used so that the feathering process is effective, otherwise overloading the brush will result in a buildup of Brushcoat which will result in a variation in texture.

#### FOR LARGE AREAS

The surface must be done from corner to corner. Apply 1 or 2 coats by brush at a spread rate of 3 – 5 m<sup>2</sup> / L / coat

- Check spread rates and tools.
- The product is supplied ready for use. Mix gently with a flat paddle before and during application.
- Clean with water.

# Marmoran

The Architects' Choice

## BRUSHCOAT

<b>PRODUCT DATA</b>	
Composition	Inert Pigments Fillers and additives dispersed in an acrylic resin
Solvent Type	Water
Solids	Volume 42% ± 2% Mass 61% ± 2%
<b>VOC LEVEL</b>	<b>0g/L The GREEN SEAL STANDARD is 150g/L [11.5%] for non-flat coatings.</b>
Drying Times @ 25° C 65% RH	Surface dry: 2 hours Hard Dry: 6-12 hours Over coating time: 12-24 hours. Higher temperatures will accelerate the drying times (± halved for every 10 ° C increase) Lower temperatures will retard the drying times (±doubled for every 10 °C decrease)
Typical Spread Rate	3 – 5 m <sup>2</sup> / L / coat. This figure is indicative, and subject to applicator skill and substrate type and condition. Actual spread rates must therefore be determined by the Applicator. <b>Wet Film Thickness:</b> 333-200µ per coat <b>Dry Film Thickness:</b> 140-84µ per coat
Shelf Life and Storage	6 - 8 Months in unopened containers. Store in a cool dry and well ventilated place away from excessive heat or open flame. Do not allow to freeze.
Transport	This product is non-hazardous in accordance with Transportation and Classification of Dangerous Goods Act (1996)
Handling & Safety	This product is water based and non-toxic. Keep out of reach of children. It does contain chemicals that may be irritants to mammalian tissue. Appropriate protective clothing must be worn. Protect eyes and skin from exposure. If the product is being sprayed, ensure adequate ventilation and ensure the use of proper ventilated masks. Wash spillages immediately with water. Do not induce vomiting if swallowed. Consult a physician if irritation of skin persists or if product is ingested. Gather up environmental spillages, and dispose of in accordance with regulations of the local authorities.
Disclaimer	All information contained herein is given in good faith, based on our specialised knowledge and experience. We reserve the right to effect changes to product and specification alike in the interest of product development and improving technology.