



Apple Mint **4628**
NCS S 4010-B70G

w/r 2610
LRV 30.7

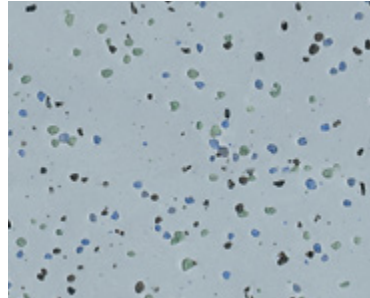


Iris **4629**
NCS S 3010-B

w/r 5350
LRV 37.1

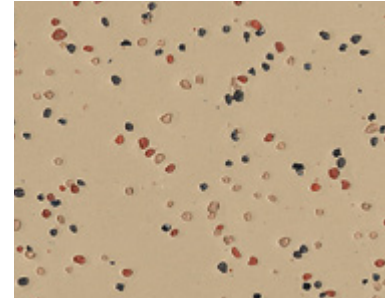


Allspice **4622**
NCS S 3010-Y20R

w/r 9110
LRV 36.5

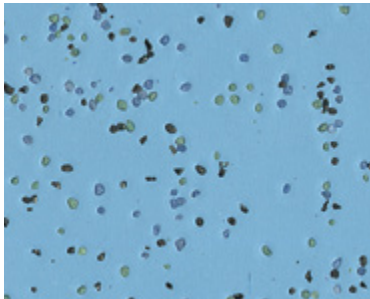


Chicory **4625**
NCS S 2030-R90B

w/r 3740
LRV 36.5

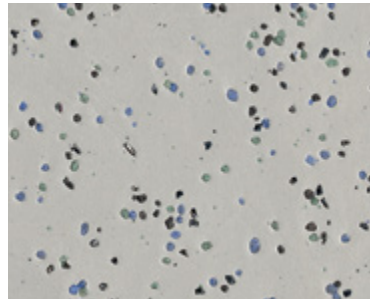

Santolina **4631**
NCS S 3000-N

w/r 3710
LRV 41.1

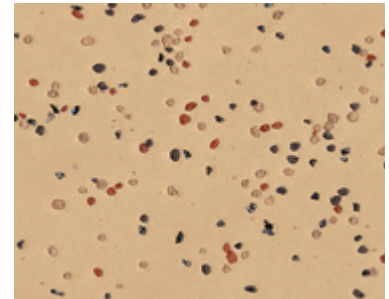


Cassia **4621**
NCS S 3020-Y10R

w/r 2500
LRV 41.1




Starflower **4627**
NCS S 3050-R90B

w/r 3750
LRV 19.7

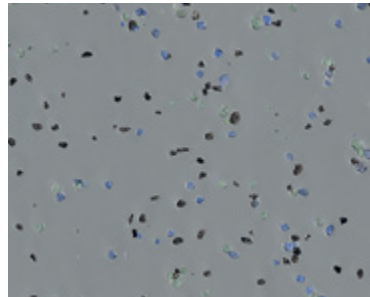


Anise Grey **4632**
NCS S 5005-B20G

w/r 3720
LRV 25.4

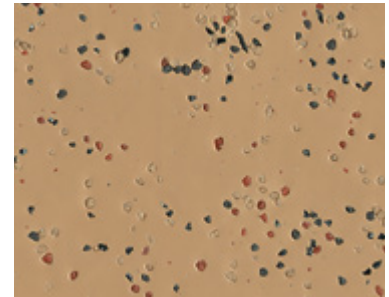


Caraway **4623**
NCS S 4020-Y30R

w/r 2510
LRV 29.6

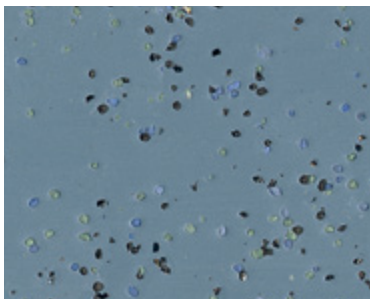


Tuscan Blue **4626**
NCS S 4020-B

w/r 9170
LRV 22.1

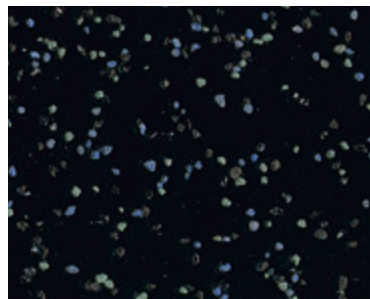

Blackseed **4633**
NCS S 8500-N

w/r 8640
LRV 5.6

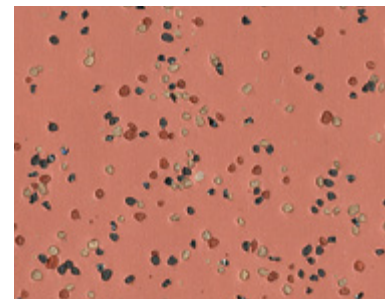

Mace **4624**
NCS S 3030-Y70R

w/r 4624
LRV 25.5

w/r = weld rod NCS = Natural Colour System LRV = Light Reflectance Value



100% RECYCLABLE
25% RECYCLED MATERIAL

° Refer to BRE Global ratings on www.greenbooklive.com



Sustainable Slip Resistance
throughout product's guaranteed life

RRL Pendulum Wet Test - HSE Compliant