

The right way to attach almost anything to metal roofs!

# S-5!<sup>®</sup>

## The Right Way

### S-5! CorruBracket™

CorruBracket™ is compatible with 16-18mm corrugated roofing profiles. CorruBracket is affixed to the crest of the corrugation, leaving the valleys free of holes. S-5! CorruBracket comes with a factory-applied EPDM rubber gasket seal protecting against leaks.

S-5! CorruBracket is mounted directly onto the crest of the corrugation, straddling the valley. No surface preparation is necessary; simply wipe away excess oil and debris, align, and apply. Secure directly into the crest of the corrugation by driving the appropriate screws into the six pre-punched holes, or pre-drilling the proper sized hole through the six pre-punched holes and riveting.


#### S-5!® CorruBracket™ Mini

The Mini is shorter than the Standard, and has only one fastener hole on each side.


**S-5!® CorruBracket™ is the right way to attach almost anything to Safintra's Classicorr corrugated and all other 16-18mm corrugated sheeting.**

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.

1



2



CorruBracket™ and CorruBracket™ Mini


S-5! CorruBracket™ can be used for almost any attachment need on Safintra Classicorr corrugated and other 16-18mm corrugated metal sheeting.

## S-5!® holding strength is unmatched in the industry.

Each S-5! CorruBracket™ comes with factory-applied EPDM rubber gaskets on the base. A structural aluminum attachment bracket, CorruBracket is compatible with most common metal roofing materials.


For design assistance, contact Safintra South Africa (and see our website [www.safintra.co.za](http://www.safintra.co.za)), or visit [www.S-5.com](http://www.S-5.com) for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

## S-5! CorruBracket™

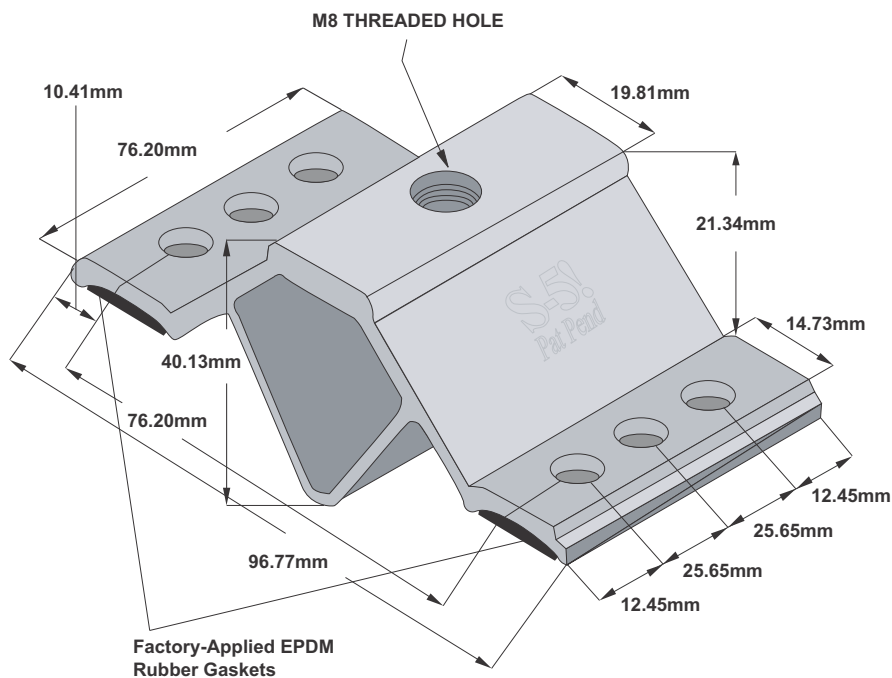


Please note: All measurements are rounded to the second decimal place

classi**corr**  
~~~~~ corrugated

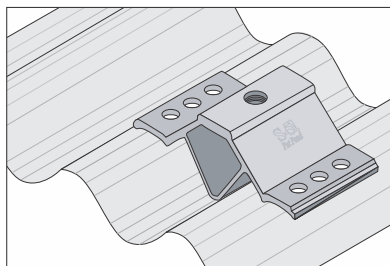

**CorruBracket™ - Standard Size**  
Note three fastener holes on each side.

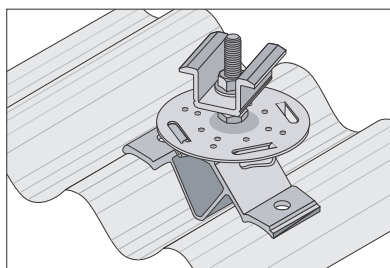

**CorruBracket™ - Mini**  
with PV-Kit attachment.  
Note single fastener hole on each side.

## S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at [www.S-5.com](http://www.S-5.com).

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Sole Agents for Africa:

**SAFINTRA**  
world class roofing systems

[www.safintra.co.za](http://www.safintra.co.za) / [www.safintra.com](http://www.safintra.com)