


SPFGISG1.0 / 1.2 / 1.5 / 1.8

SAVI PHIFER SILVER GREY VINYL COATED GLASS FIBRE SCREEN MESH

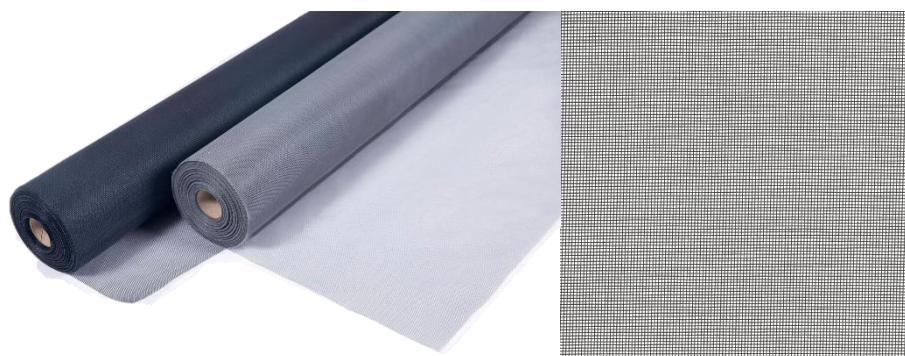

Product: Glass Fibre 18 x 16 Mesh Count, 0.279mm Yarn

Characteristics	Test Method	Nominal Results	
Tensile Strength		WARP	FILL
A) Cut Strip (kg)	ASTM D 5035	48.08	41.73
B) Grab (kg)	ASTM D 5034	48.53	41.28
Tearing Strength			
Trapezoid Method (kg)	ASTM D 5587	5.44	4.99
Yarn Slippage (kg)	ASTM D 4912	10.89	10.89
Stiffness (mg)	ASTM D 3656	83	73
Mesh Weight (g/m ²)	ASTM D 1777	108.5	
Fabric Thickness (mm)	ASTM D 1777	0.3048	
Bond Strength (kg)	CS 248-64 (5.5)	12.7006	
Openness/Transmittance (%)	I7	59.4	
Blocking	FS L-S125 (4.4.9)	Scale 1	
Colour Fastness to 1200hrs	TMS-TM-003	4 Min	
Mullen Burst Strength (psi)	FS L-S125B (4.4.7)	121	

Results listed are typical for the product and are for reference purposes only



PHIFER
INCORPORATED



DESCRIPTION

SAVI PHIFER SILVER GREY VINYL COATED INSECT SCREEN MESH

SPECIFICATIONS

- **Code:** SPFGISG1.0/1.2/1.5/1.8
- **Name:** Savi Silver Grey Vinyl Coated Fly Screen Mesh
- **Fibre composition:** Woven Permanent Glass Fibre Yarn
- **Coating composition:** Vinyl Protective Coating
- **Colour:** Silver Grey (Other Colours available on Request)
- **Weight:** 108.5 gsm
- **Hole Count:** 18 x 16 Holes in a 25.4mm x 25.4mm square
- **Roll Widths available:** 1016mm / 1219mm / 1524mm / 1828mm
- **Roll Length:** 30.48m (Longer Roll Lengths available on Request)

APPLICATION

- For use in Insect Barrier Screen Applications.

GAURANTEE

- Savignac 1 Year Guarantee applicable, provided fair use and neglect or abuse is not evident, Terms and Conditions Do Apply. Please ask your nearest Savignac Branch for Details.

CERTIFICATION

- Product passed 1200 hours of QUV accelerated weathering.
- Product is GREENGUARD certified.