

GARAGE DOORS



Alu & Polycarb



Marine Ply



Alu & Marine Ply

Quality Durable Garage Doors



Van Acht offers a wide variety of garage doors. Our garage doors are made from the best quality materials which enhances the aesthetic qualities of our garage doors and also their durability in our harsh African climate. Our highly motivated and qualified installation teams will ensure that your doors are installed professionally.

Van Acht only uses the best tried and tested motors that come standard with battery back-up for those days when the electricity lets you down.



V-Tech Marine Ply Garage Doors

The V-Tech garage door range has been specifically designed to withstand our harsh Highveld climate. Marine ply has been used as an engineering material in the marine and aviation industries since World War 2. Marine Ply is highly resistant to fungal attacks and can withstand extended exposure to moisture hence the name 'Marine'. It is often used in the construction of boats and docks, much of its strength is due to the strong Weather and Boil Proof (WBP) glue that is used between the ply.

Marine Ply should not be confused with chip-board. Marine ply is made from hardwood that is cut into several layers (ply) that are pressure bonded together with their adjacent layers having their grain at 90° angles to each other for greater strength. Manufacturing marine ply is a time consuming and expensive process that has been perfected over the last 60 years to produce a product that will out perform and outlast virtually any solid wood. Garage doors are more often than not directly exposed to the elements and it is for this reason that we have chosen a material that is highly resistant to cracking, warping, shrinkage, rotting and twisting.

Marine ply is also environmentally friendly due to its nature as carbon sink and its allowance for the optimization of wood.



Marine-Ply

Single 10 Panel
(Code: GSNGL E 10P)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single 10 Panel with Polycarbonate
Panel (Code:GSNGL E 10PGT)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 20 Panel
(Code: GDBL E 20P)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double 20 Panel with Polycarbonate
Panel (Code: GDBL E 20PGT)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Single 20 Panel
(Code: GSNGL E 20P)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single 20 Raised and fielded panel
(Code: GSNGL E 20RFP)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 40 Panel
(Code: GDBL E 40P)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double 40 Raised and fielded panel
(Code: GDBL E 40RFP)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Marine Ply and Polycarbonate Range



Caravan Height
Opening 2550mm / Door 2570mm



SUV Height
Opening 2380mm / Door 2410mm




Care and Maintenance

Our garage doors are pre-treated. It is recommended that Marine Ply garage doors are treated annually or when appearing dry.



Use V-COAT on your garage doors to protect them from the rain and sun !

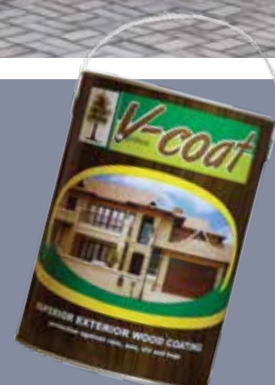

Single 20 Panel with Polycarbonate Panel (Code:GSNGL E 20PGT)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single Horizontal with Polycarbonate Panel (Code: GSNGL 4 HORIZ GT)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 40 Panel with Polycarbonate Panel (Code: GDBL E 40PGT)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double Horizontal with Polycarbonate Panel (Code: GDBL 4 HORIZ GT)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Single Vertical Barn (Code: GSNGL 4 BARN)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single Horizontal (Code: GSNGL 4 HORIZ)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double Vertical Barn (Code: GDBL 4 BARN)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double Horizontal (Code: GDBL 4 HORIZ)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm



Caravan Height
Opening 2550mm / Door 2570mm



SUV Height
Opening 2380mm / Door 2410mm

Care and Maintenance

Our garage doors are pre-treated. It is recommended that Marine Ply garage doors are treated annually or when appearing dry.



Single Vertical Arch
(Code: GSNGL 4 VERTARCH)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single Vertical Panel Arch
(Code: GSNGL 4 PARCHHB)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double Vertical Arch
(Code: GDBL 4 VERTARCH)




Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double Vertical Panel Arch
(Code: GDBL 4 8PARCHHB)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Single Vertical Barn Arch
(Code: GSNGL 4 ARCH BARN)

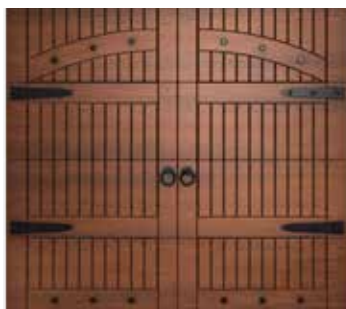


Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double Vertical Barn Arch
(Code: GDBL 4 ARCHBARN)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

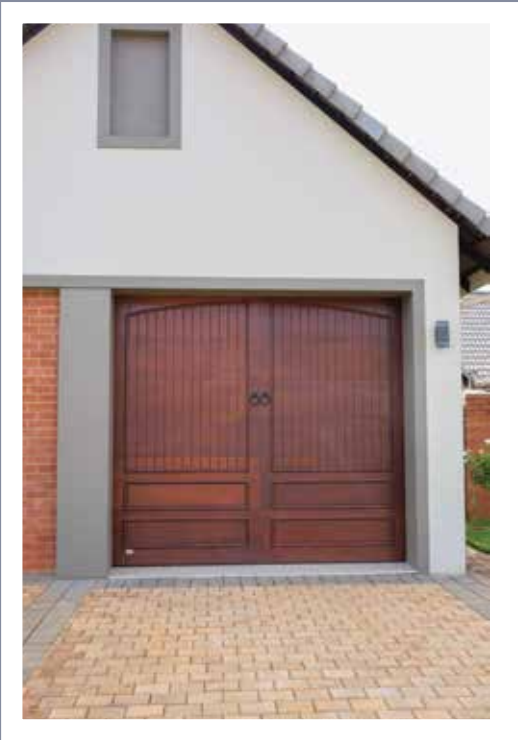

Caravan Height
Opening 2550mm / Door 2570mm



SUV Height
Opening 2380mm / Door 2410mm

Care and Maintenance

Our garage doors are pre-treated. It is recommended that Marine Ply garage doors are treated annually or when appearing dry.





Single Horizontal NO9 Design LH
(Code: GSNGL 4 HOR NO9 LH)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double Horizontal NO9 LH
(Code: GDBL 4 HOR NO9 LH)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double Horizontal NO9 X2
(Code: GDBL 4 HOR NO9X2)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

When placing an order for a NO9 garage door, please specify whether glass panels should be RH or LH.



Matching marine ply pivot door to compliment your garage door.

Code: IVT NO 9

Size: 1200x2032mm



Caravan Height
Opening 2550mm / Door 2570mm




SUV Height
Opening 2380mm / Door 2410mm



Care and Maintenance

Our garage doors are pre-treated. It is recommended that Marine Ply garage doors are treated annually or when appearing dry.

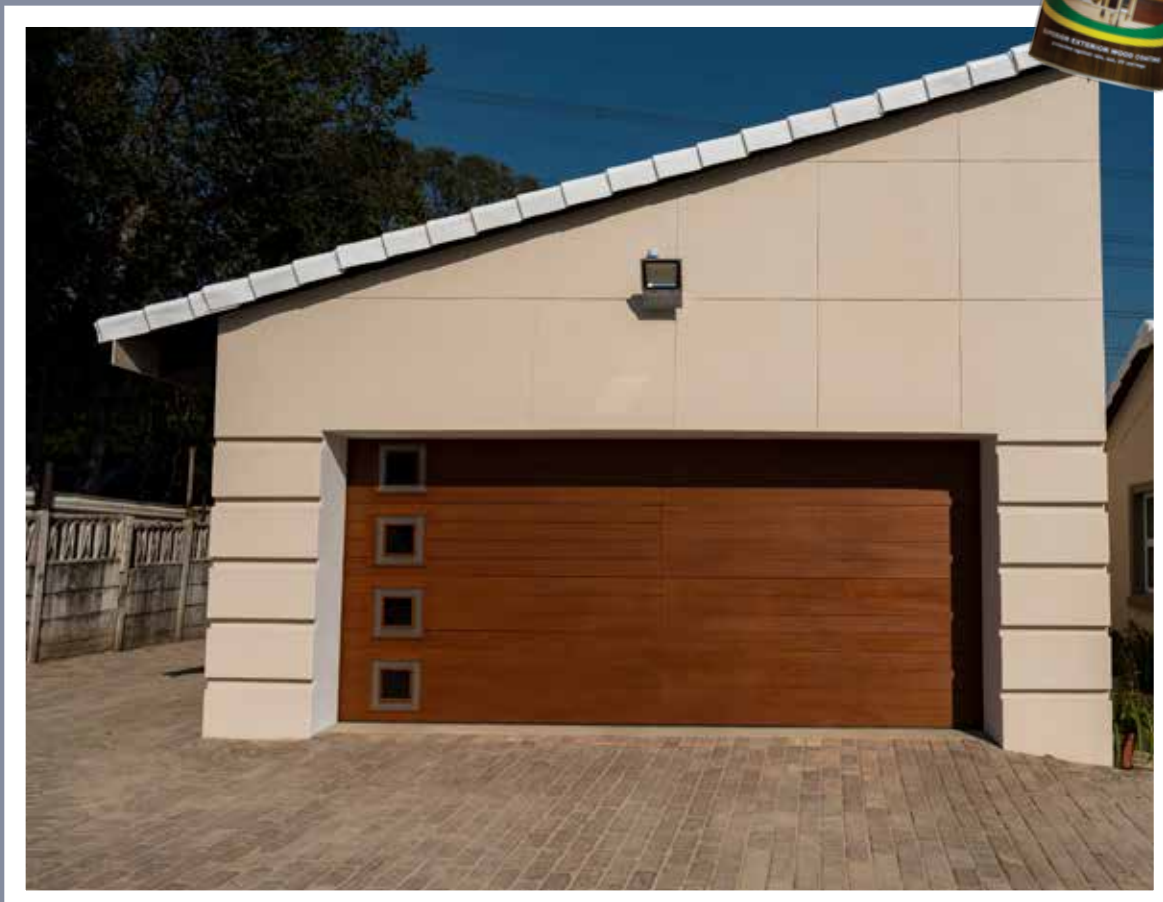

Single 12 Panel YOSO Type 1 Charcoal
(Code: GASY 12PUE T1C)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single 12 Panel YOSO Type 2 Charcoal
(Code: GASY 12PUE T2C)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 16 Panel YOSO Type 2 Charcoal
(Code: GADY 16PUE T1C)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double 16 Panel YOSO Type 2 Charcoal
(Code: GADY 16PUE T2C)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Single 12 Panel YOSO Type 3 Charcoal
(Code: GASY 12PUE T3C)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 16 Panel YOSO Type 3 Charcoal
(Code: GADY 16PUE T3C)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Aluminium Frame with Marine Ply and Polycarbonate Panels

Aluminium Frames available in : Black, Charcoal, Bronze, White

Single 12 Panel YOSO Type 4 Charcoal
(GASY 12PUE T4C)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 16 Panel YOSO Type 4 Charcoal
(GADY 16PUE T4C)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm



SUV Height
Opening 2380mm / Door 2410mm



Caravan Height
Opening 2550mm / Door 2570mm

Below: Single 12 Panel YOSO Garage Door T2, Bronze Aluminium Frame



Aluminium Polycarbonate Range

Single 8 Panel Polycarbonate Charcoal
(Code: GAS 8P CG)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single 12 Panel Polycarbonate Charcoal
(Code: GAS 12P CG)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 12 Panel Polycarbonate Charcoal
(Code: GAD 12P CG)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Double 16 Panel Polycarbonate Charcoal
(Code: GAD 16P CG)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm

Single 12 Panel Polycarbonate Charcoal
(Code: GAS 12PUE CG)



Door Size : (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Double 16 Unequal Polycarbonate Charcoal
(Code: GAD 16PUE CG)



Door Size : (w) 4940mm x (h) 2170mm
Opening Size: (w) 4880mm x (h) 2135mm



Caravan Height
Opening 2550mm / Door 2570mm



SUV Height
Opening 2380mm / Door 2410mm

Why we use Polycarbonate

- Industry reputation for strength
- Shatter resistant
- Durable
- Lightweight
- Natural UV protection
- Flexible

The main reason we use polycarbonate on all our garage doors is due to it being very lightweight, this minimises the strain on garage door hardware making your hardware and motor last longer.

Originally created by aerospace industry. Polycarbonate is a synthetic composition that was originally invented in the process of creating strong gear for astronauts. Specifically, the polycarbonate created was intended for astronaut visors.


Industry reputation for strength. Polycarbonate is widely accepted for its durability. In addition to sunglass lenses, polycarbonate is used to make airplane windows, bulletproof windows, and police riot shields.

Attention-catching performance stats. Polycarbonate is about 10 times stronger than glass or regular plastic and it also outperforms the FDA's basic requirements for impact resistance, exceeding standard figures by more than 40 times.

Garage Door Measuring form (Double)

- Please ensure that your garage door is cleared of any building materials or debris that might hamper installation.
- If measurements exceed minimum dimensions, standard garage doors cannot be fitted.
- Removal of old doors will be charged for.
- Please complete the following checklist, indicate with a ✓ or ✗

- Electricity on site
- My garage is free of building material and debris
- I want installation of both garage door and motor
- I will ensure that the ceiling is fitted and screeding is finished before installation
- Manhole in ceiling for access to roof
- I am aware that I should oil my garage door regularly
- Please specify garage door to be installed eg: Horizontal

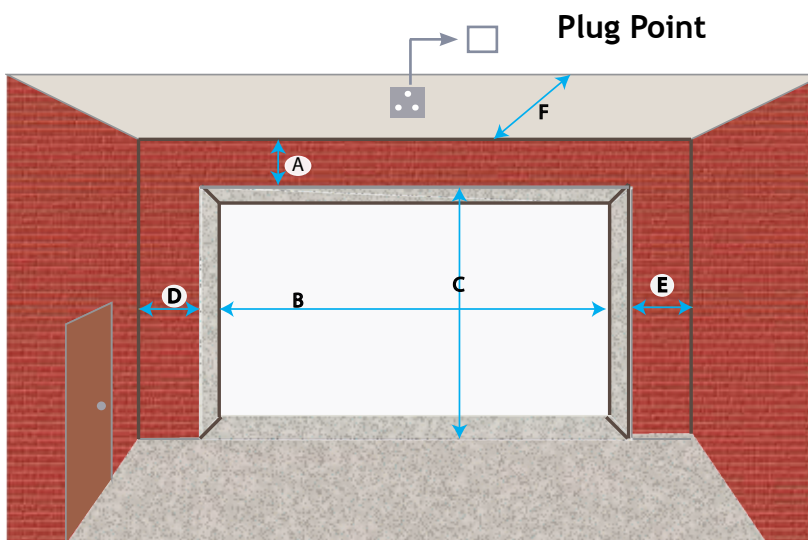

- A: Minimum 400mm
- B: Standard 4880mm
- C: Standard 2130mm
..... Caravan 2530mm
..... SUV 2380mm
- D: Minimum 150mm
- E: Minimum 150mm
- F: Minimum 3400mm

Guarantee

All work done and charged for is guaranteed for 12 months from date of invoice. 12 month guarantee on parts and installation. The Centurion motor has a 24 month guarantee. The first 12 months is an on site repair guarantee, thereafter motors need to be sent to Centurion Motors for repairs (call out fee will be charged). Power supply and battery only have a 6 month guarantee. The power supply and motor are not guaranteed against lightning and power surge damage. We highly recommend that all customers retrofit a surge protector on the plug.

Maintenance

Your garage door needs to be serviced every 12 months by certified contractors. Springs need tensioning and parts will need oiling. This will help extend the life of the motor.


Name

Date

Signature

Garage Door Measuring form (Single)

- Please ensure that your garage door is cleared of any building materials or debris that might hamper installation.
- If measurements exceed minimum dimensions, standard garage doors cannot be fitted.
- Removal of old doors will be charged for.
- Please complete the following checklist, indicate with a ✓ or ✗
- Electricity on site
- My garage is free of building material and debris
- I want installation of both garage door and motor
- I will ensure that the ceiling is fitted and screeding is finished before installation
- Manhole in ceiling for access to roof
- I am aware that I should oil my garage door regularly
- Please specify garage door to be installed eg: Horizontal

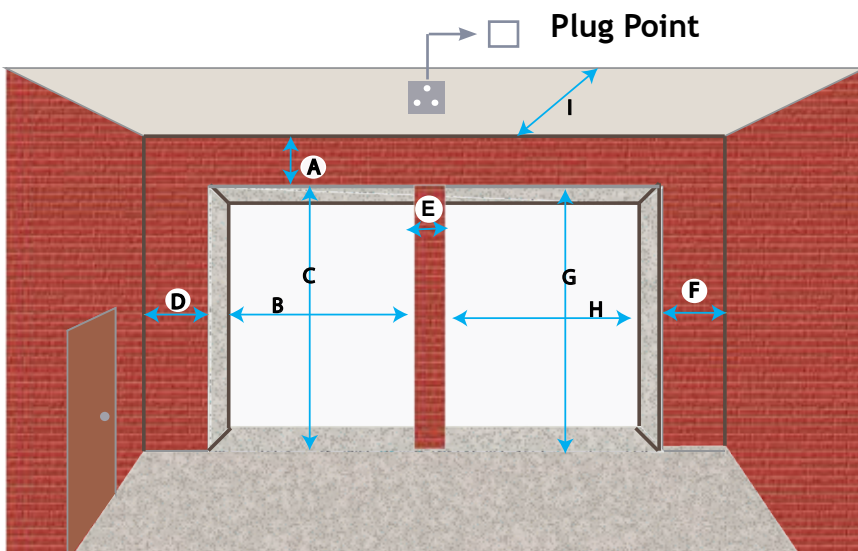

- A: Minimum 400mm
- B: Standard 2440mm
- C: Standard 2130mm or Caravan 2530mm SUV2380mm
- D: Minimum 150mm
- E: Minimum 400mm
- F: Minimum 150mm
- G: Standard 2130mm or caravan 2530mm
- H: Standard 2440mm
- I: Minimum 3400mm

Guarantee

All work done and charged for is guaranteed for 12 months from date of invoice. 12 month guarantee on parts and installation. The Centurion motor has a 24 month guarantee. The first 12 months is an on site repair guarantee, thereafter motors need to be sent to Centurion Motors for repairs (call out fee will be charged). Power supply and battery only have a 6 month guarantee. The power supply and motor are not guaranteed against lightning and power surge damage. We highly recommend that all customers retrofit a surge protector on the plug.

Maintenance

Your garage door needs to be serviced every 12 months by certified contractors. Springs need tensioning and parts will need oiling. This will help extend the life of the motor.

Name

Date

Signature

Kya Sand (Head office)
148 Industrial Rd, Randburg, JHB
Tel: 011 708 2488
sales@vanacht.co.za

Hartbeespoortdam
R512, Grootplaas Farm Stall,
Opposite Pecanwood
Tel: 012 244 1319
dirk@vanachtharties.co.za

Pretoria (Montana)
Sefako Makgatho Drive, 1 Calliandra Place,
Calliandra Rd, opposite CTM
Tel: 012 548 7672
tinus@vanachtmontana.co.za

Klerksdorp
2 Neethling str, Elandsheuwel
Tel: 018 462 0784
chris@vanachtklerksdorp.co.za
sheena@vanachtklerksdorp.co.za

Krugersdorp
Corner Baratt & Coppinger str, Factoria
Tel: 011 664 7192
peter@vanachtkruger.co.za

www.vanacht.co.za

