































Contents

Berberesque 06 Classique Cottage Weave 08 Design Jewel Diplomat 12 Frivola 14 Kashmir 16 Manhattan 18 Michigan Romeo 24 Shaggy Exclusive Sorrento 26 Stately Homes 28 Tibet Velocity Weave Craft 34

COMMERCIAL CARPETS

Barcode Earth	36
Column	38
Concord Earth	40
Director Earth	42
Econorib Earth	44
Excel Earth	46

Florpoint Earth	48
Genesis	50
Lineal	52
Longitude	54
Maestro	56
Melody	58
Natural Choice Earth	60
Neon	62
Optimum Collection	64
Pinning Board	66
Powerpoint Earth	68
Striations Earth	70
Titanium Collection	72
Tuftile Excel	74

LUXURY VINYL FLOORING

Rococo Stick Down	76
Rococo Wide Plank	78
Verso	80

WOVEN VINYL FLOORING

Athena 8	3	2)
Atticità	11	_	-

LAMINATES

Pergo Original	
- AquaSafe	84
- Domestic Elegance	86
- Long Plank	88

ARTIFICIAL GRASS

Easigrass	90
Fibregrass	92

UNDERLAYS

Ecolay	94
Instalay	95

RUBBER PAVING & FLOORING

rohuild		96
ronillia		Чh





Berberesque

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

BERBERESQUE (colour name), broadloom, tufted loop pile made from 100% Stain Shield fibres by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE		
Pile Fibre	100% Stain Shield Fibre	
Backing	POWERbac (Moisture-resistant and rot-proof)	
Fibre Weight	850gsm	
Total Weight	2050gsm	
Total Thickness	9mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential	
Fire rating	3	
Size	3.66m	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	



Made in



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating



Silver Protection














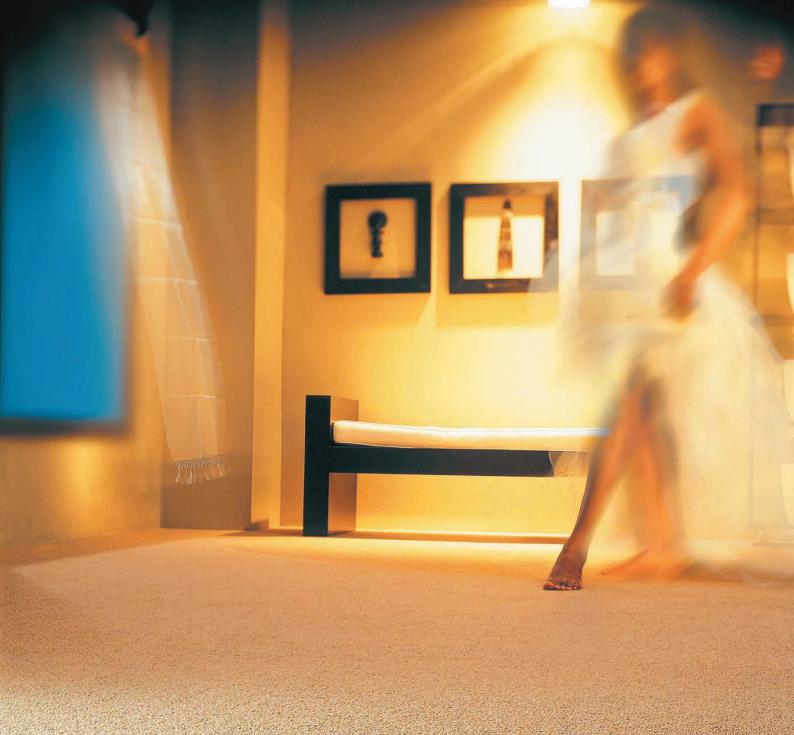

Classique

NORWOOD

Classique

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: CLASSIQUE tufted loop pile, made from 100% Stain Shield Fibre in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% Stain Shield Fibre
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	500gsm
Total Weight	1440gsm
Total Thickness	6mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested




Anti-allergenic















Cottage Weave

FROST

Cottage Weave

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

COTTAGE WEAVE (colour name), tufted level loop pile made from 100% BCF Stain Shield fibres by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE		
Pile Fibre	100% Stain Shield Fibre	
Backing	POWERbac (Moisture-resistant and rot-proof)	
Fibre Weight	500gsm	
Total Weight	1440gsm	
Total Thickness	6mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential	
Fire rating	3	
Size	3.66m	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic





























Design Jewel

MÒSS

Design Tewel

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

DESIGN JEWEL (colour name), broadloom, luxury woven cut pile made from 100% PP B-Tron by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

LUXURY WOVEN CUT PILE	
Pile Fibre	100% PP B-Tron Stain Shield Fibre
Backing	Polycotton/Jute
Fibre Weight	2300gsm
Total Weight	2850gsm
Total Thickness	11mm
Protective Finish	Stain Shield
Location Grade	Medium Commercial
Fire rating	3
Size	4m
Pattern repeat	Horizontal: 5.5cm Vertical: 4.5cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in Belgium by Balta







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested




Anti-allergenic

















Diplomat

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

 Vacuum thoroughly and frequently.
 Remove spills and marks immediately.
 General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

DIPLOMAT tufted cut pile carpet made from 100% Aquafil heat-set Nylon 6 in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	TUFTED CUT PILE
Pile Fibre	100% Aquafil heat-set Nylon 6
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	1100gsm
Total Weight	2020gsm
Total Thickness	8mm
Protective Finish	Stain Shield
Location Grade	Heavy Commercial
Fire rating	2
Size	3.66m
Pattern repeat	Horizontal: 4.0cm Vertical: 3.5cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local and imported raw materials



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic





















Frivola

CREAM 36

FUGA

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

FRIVOLA (colour name), tufted cut pile made from 100% Nylon Imprel® Finesse by Balta, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

Т	UFTED CUT PILE
Pile Fibre	100% Nylon Imprel® Finesse
Backing	Twin back
Fibre Weight	1100gsm
Total Weight	1950gsm
Total Thickness	7mm
Protective Finish	Colorguard
Location Grade	Heavy Residential
Fire rating	3
Size	4m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in Belgium by the Balta Group
Sound Insulation	28dB







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating




















Kashmir

HONEYDEW

Kashnin

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: KASHMIR (colour name), tufted loop pile made from 100% BCF Stain Shield fibres by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% Stain Shield Fibre
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	850gsm
Total Weight	2050gsm
Total Thickness	9.5mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials



Made in South Africa



Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating


















Manhattan

YORKVILLE

Manhatan

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

MANHATTAN (colour name), tufted loop pile made from 100% BCF Nylon 6 by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% BCF Nylon 6
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	380gsm
Total Weight	1220gsm
Total Thickness	5.5mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from imported and local raw materials



South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic




Shield Rating






















Michigan

MALIBU

Michigan

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: MICHIGAN (colour name), broadloom, tufted patterned cut pile made from 100% Xentrys Heatset Nylon 6 with Enduroback KR4® (Modified Recycled Bitumen) by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED PATTERNED CUT PILE	
Pile Fibre	100% Xentrys Heatset Nylon 6
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	1100gsm
Total Weight	2075gsm
Total Thickness	8mm
Protective Finish	Stain Shield
Location Grade	Heavy Commercial
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from imported and local raw materials



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested





Anti-allergenic





















Komeo

OYSTER 32

Roneo

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

ROMEO (colour name), tufted cut pile made from 100% Nylon Imprel® Opal by Balta, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED CUT PILE	
Pile Fibre	100% Nylon Imprel® Opal
Backing	Twin back
Fibre Weight	2000gsm
Total Weight	2700gsm
Total Thickness	12mm
Protective Finish	Colorguard
Location Grade	Heavy Residential
Fire rating	3
Size	4m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in Belgium by The Balta Group
Sound Insulation	30dB







5 Year Guarantee



10 Year Warrantee



ISO Certification



Colorguard



Torture Tunnel Tested



Anti-allergenic



Shield Rating





















Shaggy Exclusive

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Broadloom: SHAGGY EXCLUSIVE (colour name), Luxury Shaggy made from 100% Heatset StainSafe PP Stain Shield Fibres by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

LUXURY SHAGGY	
Pile Fibre	100% Heatset StainSafe PP
Backing	Twinback
Fibre Weight	3200gsm
Total Weight	4210gsm
Total Thickness	30mm
Protective Finish	Stain Shield
Location Grade	Residential
Fire rating	3
Size	4m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in Belgium by Balta.



Manufactured in Belgium by Balta



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic















Sorrento

GABARDINE

Soppento

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

SORRENTO (colour name), broadloom, tufted cut-pile made from 100% Aqufil Heatset Nylon 6 by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED CUT PILE		
Pile Fibre	100% Aquafil Heatset Nylon 6	
Backing	POWERbac (Moisture-resistant and rot-proof)	
Fibre Weight	750gsm	
Total Weight	1720gsm	
Total Thickness	6mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential	
Fire rating	3	
Size	3.66m	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from imported and local raw materials	







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating































Stately Homes

BRISTOL

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: Stately Homes (colour name), broadloom, cut pile made from 100% Aquafil Heatset Nylon 6 by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED CUT PILE	
Pile Fibre	100% Aquafil Heatset Nylon 6
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	2325gsm
Total Weight	3350gsm
Total Thickness	15mm
Protective Finish	Stain Shield & Silverplus
Location Grade	Medium Commercial
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from imported and local raw materials







Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating



Silver
























Thet

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

TIBET, (colour name), tufted loop pile made from 100% PFX Stain Shield Fibre, by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% PFX Stain Shield Fibre
Backing	POWERbac (Moisture-resistant and rot-proof)
Fibre Weight	700gsm
Total Weight	1740gsm
Total Thickness	8mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic















Delocity

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

VELOCITY (colour name), tufted loop pile made from 100% BCF Stain Shield Fibres, by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% BCF Stain Shield Fibre
Backing	Powerback (moisture resistant and rotproof)
Fibre Weight	390 gsm
Total Weight	1260 gsm
Total Thickness	6 mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66 m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating















Weave Craff

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

WEAVECRAFT (colour name), tufted loop pile made from 100% BCF Stain Shield fibres by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

TUFTED LOOP PILE	
Pile Fibre	100% BCF Stainshield fibre
Backing	Powerbac (moisture-resistant and rot-proof)
Fibre Weight	740 gsm
Total Weight	1850 gsm
Total Thickness	7.5 mm
Protective Finish	Stain Shield
Location Grade	Heavy Residential
Fire rating	3
Size	3.66 m
VOC Rating	Meets requirements of green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Shield Rating
























Barcode Earth

	BROADLOOM	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre:	100% PFX Stain Shield Fibre	100% PFX Stain Shield Fibre	100% PFX Stain Shield Fibre
Backing:	Plainback	Plainback	Enduroback KR4® (Modified Recycled Bitumen)
Fibre weight:	920gsm	920gsm	920gsm
Total weight:	1250gsm	1250gsm	4000gsm
Total thickness:	8mm	8mm	9mm
Protective Finish:	Stain Shield	Stain Shield	Stain Shield
Location grade:	Heavy Commercial	Heavy Commercial	Heavy Commercial
Fire rating:	2	2	3
Width/Size:	Broadloom 3.66	50 X 50cm	50 X 50cm
VOC Rating:	Meets requirements green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials.		

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

BARCODE EARTH Broadloom, Plainback, Enduroback KR4® (Modified Recycled Bitumen) Tiles, made from 100% PFX Stain Shield Staple Fibre in (colour name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunn Tested



Anti-allergenic

















Column

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: COLUMN tufted tiles with Enduroback KR4® tiles (Modified Recycled Bitumen) made of 100% Aquafil BCF Nylon 6 by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Aquafil BCF Nylon 6	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	700gsm	
Total Weight	4250gsm	
Total Thickness	8mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Commercial	
Fire rating	2	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from imported and local raw materials	

NB: Non-Stock or special colours subject to a minimum order of 1200m², 60 x 60 cm tiles are available on request, subject to a 15% surcharge. Tiles can be fitted monolithic, tesselated, brick bond or ashlar.



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected




Torture Tunnel Tested




Anti-allergenic
















Concord Earth

RIVAGE

Concord Earth

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Broadloom & Plainback Tiles: CONCORD EARTH made from 100% PFX Stain Shield Staple Fibre in (colour name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	BROADLOOM	PLAINBACK TILES
Pile Fibre	100% Stain Shield	Staple Fibre
Backing	Plainback	
Fibre Weight	630gsm	
Total Weight	790gsm	
Total Thickness	5.5mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential/	Light Commercial
Fire rating	2	
Size	3.66m	50 x 50 cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in Scraw materials	outh Africa from local







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic

















Director Earth X ACKERMAN

Director Earth

	BROADLOOM	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre:	100% Stain Shield Fibre	100% Stain Shield Fibre	100% Stain Shield Fibre
Backing:	Plainback	Plainback	Enduroback KR4®
Fibre weight:	650gsm	650gsm	650gsm
Total weight:	810gsm	810gsm	3850gsm
Total thickness:	4.5mm	4.5mm	5.5mm
Protective Finish:	Stain Shield	Stain Shield	Stain Shield
Location grade:	Heavy Commercial	Heavy Commercial	Heavy Commercial
Fire rating:	2	2	3
Width/Size:	3.66m	50 X 50cm	50 X 50cm
VOC Rating:	Meets requirements green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials.		

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.



Made in South Africa



5 Year Guarantee



10 Year



ISO Certification



Stain Shield Protected



BILL OF QUANTITIES

(SANS 10186).

Torture Tunnel




DIRECTOR EARTH Broadloom, Plainback and Enduroback


KR4® Tiles, made from 100% Stain Shield Staple Fibre in


(colour name), by Van Dyck Carpets, laid in accordance with


the code of practice for the installation of textile floor coverings


Anti-allergenic

















Econorib Earth

PASSE

Econopia Eaph

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Broadloom and Plainback Tiles: ECONORIB EARTH made from 100% PFX Stain Shield Staple Fibre in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	BROADLOOM	PLAINBACK TILES
Pile Fibre	100% Stain Shield Staple Fibre	
Backing	Plainback	
Fibre Weight	450gsm	
Total Weight	620gsm	
Total Thickness	3.5mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential/	Light Commercial
Fire rating	3	
Size	3.66m	50 x 50 cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic

























Excel Earth

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

EXCEL EARTH Plainback and Enduroback KR4 (Modified Recycled Bitumen) tiles, made from 100% PFX Stain Shield Staple Fibre in (colour name) by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre	100% Stain S	Shield Staple Fibre
Backing	Plainback	Enduroback KR4® (Modified Recycled Bitumen)
Fibre Weight	920gsm	
Total Weight	1250gsm	4000gsm
Total Thickness	8mm	9mm
Protective Finish Stain Shield		
Location Grade	Heavy Commercial	
Fire rating	2	3
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	

NB: Minimum made to order 1000m² per colour.



South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic

















Florpoint Earth

	BROADLOOM	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre	100% Stain Shield St	aple Fibre	
Backing	Plainback	Plainback	Enduroback KR4® (Modified Recycled Bitumen)
Fibre Weight	980gsm	980gsm	
Total Weight	1285gsm	1285gsm	4000gsm
Total Thickness	7mm	7mm	8 mm
Protective Finish	Stain Shield	Stain Shield	Stain Shield
Location Grade	Heavy Commercial		
Fire rating	2	2	3
Size	3.66m	50 x 50 cm	50 x 50 cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials		

^{*60} x 60cm, 100 x 100cm, 25 x 100cm made to order.

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. *General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.



Made in South Africa

BRIGHT

GOLD



5 Year Guarantee

BRIGHT

ORANGE



10 Year Warrantee

BRIGHT

RED



ISO Certification



Stain Shield Protected



BILL OF QUANTITIES

Torture Tunnel



installation of textile floor coverings (SANS 10186).

FLORPOINT EARTH Broadloom plainbak and Enduroback

KR4® (Modified Recycled Bitumen) tiles, made from 100%


PFX Stain shield staple fibre in (colour name) by Van Dyck

Floors, laid in accordance with the code of practice for the

Anti-allergenic

BRIGHT

PURPLE

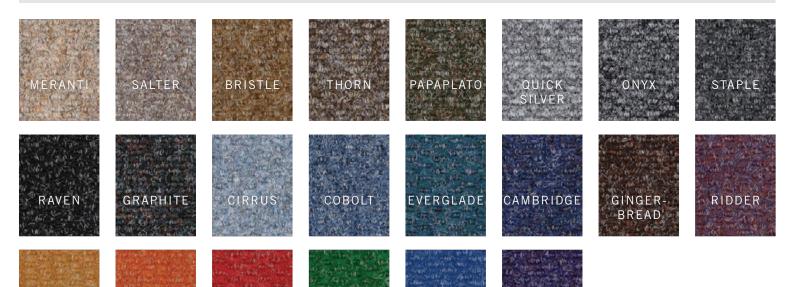

BRIGHT

BLUE

BRIGHT

GREEN



Genesis

MORSE

Genesis

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: GENESIS, 50 x 50cm Enduroback KR4 \circledast tiles (Modified Recycled Bitumen) cut pile carpet tiles, made from 100% Ultron BCF Nylon 6.6 by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Ultron Nylon 6.6	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	750gsm	
Total Weight	4250gsm	
Total Thickness	6mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Residential	
Fire rating	2	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from imported and local raw materials	

Non-stock or special colours subject to a minimum order of 650m² (for non-standard 50x50cm)



South Africa



Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic















Lineal

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: LINEAL tufted tiles with Enduroback KR4® (Modified Recycled Bitumen) made from 100% Xentrys BCF Nylon 6 in (colour name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Xentrys BCF Nylon 6	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	400gsm	
Total Weight	4150gsm	
Total Thickness	5mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Commercial	
Fire rating	2	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from imported and local raw materials	

NB: All colours are made to order - 1200m² per colour.



Made in South Africa



Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic













Longitude

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: LONGITUDE tufted loop pile tiles with Enduroback KR4® made from 100% PFX Stain Shield Fibre in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Stain Shield Fibre	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	500gsm	
Total Weight	4100gsm	
Total Thickness	7mm	
Protective Finish	Stain Shield	
Location Grade	Medium Commercial	
Fire rating	3	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



Protection











Maestro Collection

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

MAESTRO COLLECTION tufted tiles with Enduroback KR4® (Modified Recycled Bitumen) made from 100% PFX Stain Shield Fibre in (design name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% PFX Stain Shield Fibre	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	500gsm	
Total Weight	4100gsm	
Total Thickness	7mm	
Protective Finish	Stain Shield	
Location Grade	Medium Commercial	
Fire rating	3	
Size	50 x 50cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	







Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic











Melody

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: MELODY tufted tiles with Enduroback KR4® (Modified Recycled Bitumen) made of 100% Aquafil BCF Nylon 6 by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Aquafil BCF Nylon 6	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	750gsm	
Total Weight	4250gsm	
Total Thickness	8mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Commercial	
Fire rating	2	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from imported and local raw materials	

NB: Non-Stock or special colours subject to a minimum order of 1200m^2 , 60 x 60 cm tiles are available on request, subject to a 15% surcharge. Tiles can be fitted monolithic, tesselated, brick bond or ashlar.



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification




Stain Shield Protected




Torture Tunnel Tested



Anti-allergenic













Natural Choice Earth

OATS

Natural Choice Earth

	BROADLOOM	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre	100% Stain Shield Staple Fibre		
Backing	Plainback	Plainback	Enduroback KR4® (Modified Recycled Bitumen)
Fibre Weight	700gsm	700gsm	700gsm
Total Weight	940gsm	940gsm	3690gsm
Total Thickness	5mm	5mm	8 mm
Protective Finish	Stain Shield	Stain Shield	Stain Shield
Location Grade	Medium Commercial		
Fire rating	2	2	3
Size	3.66m	50 x 50 cm	50 x 50 cm
VOC Rating	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials		

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.



Made in South Africa



5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



BILL OF QUANTITIES

Torture Tunnel Tested



Broadloom, Plainback and Enduroback KR4® (Modified

Recycled Bitumen) tiles: NATURAL CHOICE EARTH made from

100% PFX Stain Shield Staple Fibre in (colour name), by Van

Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

el Anti-allergenic

























Reon

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Tiles: NEON tufted tiles with Enduroback KR4® made from 100% Xentrys BCF Nylon 6 in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES			
Pile Fibre	100% Xentrys BCF Nylon 6		
Backing	Enduroback KR4® (Modified Recycled Bitumen)		
Fibre Weight	440gsm		
Total Weight	4250gsm		
Total Thickness	5mm		
Protective Finish	Stain Shield		
Location Grade	Heavy Commercial		
Fire rating	2		
Size	50 x 50 cm		
VOC Rating	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from imported and local raw materials		







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic






















Optimum Collection

PATCH - ASH GREY

Optimum Collection

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Optimum Collection tufted tiles with Enduroback KR4® (Modified Recycled Bitumen) made from 100% Aquafil BCF Nylon in (design name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Aquafil BCF Nylon	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	500gsm	
Total Weight	4100gsm	
Total Thickness	±7mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Commercial	
Fire rating	2	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	

Other sizes: 60x60cm, 100x100cm & 25x100cm are available on request.



Made in South Africa



Guarantee



10 Year Warrantee



Certification




Stain Shield Protected



Torture Tunne Tested




Anti-allergenic

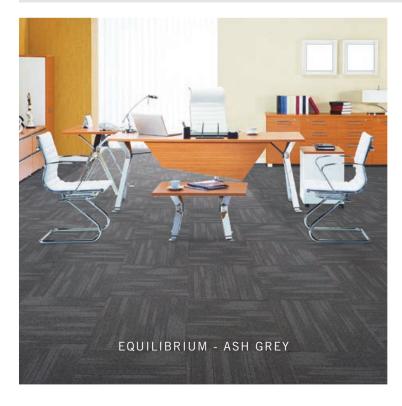











Well Done! - Miss Wells

OUR DAY AT THE BEACH

Pinning Board

LAVA

- Lach Naldoo

Pinning Board

MAINTENANCE

Enhance the performance and appearance of your Pinning Board by following these steps: • Cacuum thoroughly and frequently.

• Remove spills and marks immediately.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

PINNING BOARD made from 100% PFX Stain Shield Staple fibre in (colour name), by Van Dyck Floors.

BULLETIN BOARD		
Pile Fibre	100% PFX Stain Shield Fibre	
Backing	Foamback	
Fibre Weight	330 gsm	
Total Weight	490 gsm	
Total Thickness	9 mm	
Protective Finish	Stain Shield	
Location Grade	Bulletin Board	
Fire rating	3	
Size	2,5 m	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	







5 Year Guarantee



10 Year Warrantee



ISO Certification




Stain Shield Protected



Anti-allergenic













Powerpoint Earth

Powerpoint Earth

	BROADLOOM	PLAINBACK TILES	ENDUROBACK KR4® TILES
Pile Fibre:	100% PFX Stain Shield Fibre	100% PFX Stain Shield Fibre	100% PFX Stain Shield Fibre
Backing:	Plainback	Plainback	Enduroback KR4®
Fibre weight:	650gsm	650gsm	650gsm
Total weight:	910gsm	910gsm	4950gsm
Total thickness:	5.5mm	5.5mm	7mm
Protective Finish:	Stain Shield	Stain Shield	Stain Shield
Location grade:	Medium Commercial	Medium Commercial	Medium Commercial
Fire rating:	2	2	3
Width/Size:	3.66m	50 X 50cm	50 X 50cm
VOC Rating:	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials.		

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats. • Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

POWERPOINT EARTH Broadloom, Plainback and Enduroback KR4® tiles, made from 100% PFX Stain Shield Staple Fibre in (colour name) by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).





















FOUNDRY



Striations

TEQUILA

Apiations Earth

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

STRIATIONS EARTH Plainback and Enduroback KR4® (Modified Recycled Bitumen) tiles, made from 100% PFX Stain Shield Staple Fibre in (colour name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	PLAINBACK TILES	ENDUROBACK KR4® TILES	
Pile Fibre	100% PFX Stain Shield Staple Fibre		
Backing	Plainback	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	900gsm		
Total Weight	1290gsm	4050gsm	
Total Thickness	8mm	9mm	
Protective Finish	Stain Shield		
Location Grade	Heavy Commercial		
Fire rating	2	3	
Size	50 x 50 cm		
VOC Rating	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from local raw materials		







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested




Anti-allergenic





















MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Titanium Collection tufted tiles with Enduroback KR4® (Modified Recycled Bitumen) made from 100% Aquafil BCF Nylon 6 in (design name), by Van Dyck Floors, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES			
Pile Fibre	100% Aquafil BCF Nylon 6		
Backing	Enduroback KR4® (Modified Recycled Bitumen)		
Fibre Weight	600gsm - 700gsm		
Total Weight	4250gsm		
Total Thickness	7mm - 8mm		
Protective Finish	Stain Shield		
Location Grade	Heavy Commercial		
Fire rating	2		
Size	50 x 50 cm		
VOC Rating	Meets requirements of green star rating (GBCSA criteria)		
Country of Origin	Manufactured in South Africa from imported and local raw materials		

Other sizes: 60 x 60cm, 100 x 100cm and 25 x 100cm are available on



Made in South Africa



5 Year Guarantee



10 Year

Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel



Anti-allergenic











Title Excel

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

• Vacuum thoroughly and frequently. • Remove spills and marks immediately. * General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

TUFTILE EXCEL Enduroback KR4® 50 x 50cm tufted loop pile carpet tiles, made from 100% Ultron BCF Nylon 6.6 by Van Dyck Floors, laid in accordance with the code of practice for installation of textile floor coverings (SANS 10186).

ENDUROBACK KR4® TILES		
Pile Fibre	100% Ultron Nylon 6.6	
Backing	Enduroback KR4® (Modified Recycled Bitumen)	
Fibre Weight	610gsm	
Total Weight	4250gsm	
Total Thickness	6mm	
Protective Finish	Stain Shield	
Location Grade	Heavy Commercial	
Fire rating	3	
Size	50 x 50 cm	
VOC Rating	Meets requirements of green star rating (GBCSA criteria)	
Country of Origin	Manufactured in South Africa from local raw materials	







5 Year Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic















Rococo

	LIGHT COMMERCIAL	HEAVY COMMERCIAL	
OVERALL THICKNESS:	2.0mm	2.5mm	
WEAR LAYER THICKNESS:	0.3mm	0.5mm	
TOTAL WEIGHT:	3.46 kg/m ²	4.04 kg/m ²	
APPLICATION:	Light Commercial/Heavy Residential	Heavy Commercial	
WARRANTY:	10 years in Residential and Light Commercial applications	15 years in Residential and Light Commercial and 10 years in Heavy Commercial applications	
PRODUCT GROUP:	Luxury Vinyl Planks		
PRODUCT NAME:	Rococo		
UV TREATMENT:	UV coating with ceramic beading		
RECYCLED CONTENT:	100% Virgin - no recycled content		
BEVELLED EDGE:	Yes		
PLANK SIZE:	184.9 x 1219.2 mm		
PACKAGING SIZE:	3.607m ² per box		
ABRASION CLASS:	Group T (EN660-1/2)		
FIRE RESISTANCE:	Class Bfl S1 (EN 13501-1)		
ANTI-SLIP CATEGORY:	Class R10 (DIN 51130)		
LIGHT FASTNESS:	>6 (ISO 105-B02)		
ELECTRICAL BEHAVIOUR:	Less than 2kV, classified as anti-static (EN 1815)		
THERMAL CONDUCTIVITY:	Suitable for underfloor heating - max 26	5°C (EN 12524)	
CASTOR WHEEL TRAFFIC:	Pass (EN 425)		
RESIDUAL INDENTATION:	Pass (EN 433)		
DIMENSIONAL STABILITY:	Pass (EN434)		
CURLING EXPOSURE TO HEAT:	Pass (EN 434)		
TOXITY:	Pass (EN71-3)		
SHEARING STRENGTH OF LAY- ERS:	Pass (EN432)		
SOUND REDUCTION:	6dB (ISO10140)		
CHEMICAL RESITANCE:	Pass (EN423)		
FURNITURE DRAG:	Pass (EN424)		
VOC TESTED:	Pass		
COUNTRY OF ORIGIN:	Fully imported		

































BILL OF QUANTITIES

Light Commercial: Rococo stick-down Luxury Vinyl Tiles by Van Dyck Floors with plank sizes 187 by 1227mm and a 2.0mm overall thickness with a 0.3mm wear layer, fitted in accordance with the supplier's installation instructions.

Heavy Commercial: Rococo stick-down Luxury Vinyl Tiles by Van Dyck Floors with plank sizes 187 by 1227mm and a 2.5mm overall thickness with a 0.5mm wear layer, fitted in accordance with the supplier's installation instructions.



















Rococo Wide Plank

	LIGHT COMMERCIAL
OVERALL THICKNESS:	2.0mm
WEAR LAYER THICKNESS:	0.3mm
TOTAL WEIGHT:	3.46 kg/m ²
APPLICATION:	Light Commercial/Heavy Residential
WARRANTY:	10 years in Residential and Light Commercial applications
PRODUCT GROUP:	Luxury Vinyl Planks
PRODUCT NAME:	Rococo
UV TREATMENT:	UV coating with aluminium oxide
RECYCLED CONTENT:	100% Virgin - no recycled content
BEVELLED EDGE:	Yes
PLANK SIZE:	228.6 x 1219.2mm
PACKAGING SIZE:	3.344m² per box
ABRASION CLASS:	Group T (EN660-1/2)
FIRE RESISTANCE:	Class Bfl S1 (EN 13501-1)
ANTI-SLIP CATEGORY:	Class R10 (DIN 51130)
LIGHT FASTNESS:	>6 (ISO 105-B02)
ELECTRICAL BEHAVIOUR:	Less than 2kV, classified as anti-static (EN 1815)
THERMAL CONDUCTIVITY:	Suitable for underfloor heating - max 26°C (EN 12524)
CASTOR WHEEL TRAFFIC:	Pass (EN 425)
RESIDUAL INDENTATION:	Pass (EN 433)
DIMENSIONAL STABILITY:	Pass (EN434)
CURLING EXPOSURE TO HEAT:	Pass (EN 434)
TOXITY:	Pass (EN71-3)
SHEARING STRENGTH OF LAYERS:	Pass (EN432)
SOUND REDUCTION:	6dB (ISO10140)
CHEMICAL RESITANCE:	Pass (EN423)
FURNITURE DRAG:	Pass (EN424)
VOC TESTED:	Pass
COUNTRY OF ORIGIN:	Fully imported































BILL OF QUANTITIES

Light Commercial: Rococo stick-down Luxury Vinyl Tiles by Van Dyck Floors with plank sizes 218.6 x 1219.2mm and a 2.0mm overall thickness with a 0.3mm wear layer, fitted in accordance with the supplier's installation instructions.















PRODUCT INFORMATION LEVEL OF USE TOTAL THICKNESS 4.2 mm WEAR LAYER 0.3 mm WEAR LAYER PUR TREATMENT Superguard® TOTAL WEIGHT G/M² 7.210 kg/m² SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% THERMAL RESISTANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION 4 dB (tbc) CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤6 UNDERFLOOR HEATING Suitable, max 27°C WARRANTY (YEAR) 12 Residential / 5 Commercial		
TOTAL THICKNESS WEAR LAYER 0.3 mm WEAR LAYER PUR TREATMENT Superguard® 7.210 kg/m² SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SUIP RESISTANCE DS RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE LECTROSTATIC PERFORMANCE CASTO A dB (tbc) CASTOR CHAIR RESISTANCE No damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	PRODUCT INFORMATION	
WEAR LAYER WEAR LAYER PUR TREATMENT Superguard® 7.210 kg/m² SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SULP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ±0.25 w/(m.K) THERMAL RESISTANCE R LECTROSTATIC PERFORMANCE C2 kV FORMALDEHYDE GROUP ACOUSTIC INSULATION 4 dB (tbc) CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	LEVEL OF USE	Light Commercial/ Heavy Residential
WEAR LAYER PUR TREATMENT TOTAL WEIGHT G/M² 7.210 kg/m² SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION DIMENSIONAL STABILITY NORM: ≤0.25 w/(m.K) THERMAL RESISTANCE Q.0154 m2.k/W ELECTROSTATIC PERFORMANCE C2 kV FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ✓ 6 UNDERFLOOR HEATING Suitable, max 27°C	TOTAL THICKNESS	4.2 mm
TOTAL WEIGHT G/M² SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE BSIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE Q.0154 m2.k/W ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE, max 27°C	WEAR LAYER	0.3 mm
SIZE & PACKAGING PLANKS 187 x 1251 mm BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE DS RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE LECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE, max 27°C	WEAR LAYER PUR TREATMENT	Superguard®
PLANKS BOX PLANKS 2.105 m²/box (9 pcs/box) TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE CO.0154 m2.k/W ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤6 UNDERFLOOR HEATING SUITABLE, max 27°C	TOTAL WEIGHT G/M ²	7.210 kg/m ²
BOX PLANKS TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS LUNDERFLOOR HEATING SUITABIL, max 27°C LISHS 10 pcs/box) LIGHT FASTNESS LUNDERFLOOR HEATING LISHS 11 pcs/box) LIGHT FASTNESS LUNDERFLOOR HEATING LIGHS 12 pcs/box) LIGHT FASTNESS LUNDERFLOOR HEATING	SIZE & PACKAGING	
TEST RESULTS FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE SITANCE Near 27°C	PLANKS	187 x 1251 mm
FIRE RESISTANCE SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SUBJECT SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE, max 27°C	BOX PLANKS	2.105 m ² /box (9 pcs/box)
SCRATCH RESISTANCE SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE RELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SSAM MARCE SUITABLE SUSTANCE NO damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE NO SUITABLE NO SUITABLE, max 27°C	TEST RESULTS	
SQUARENESS & STRAIGHTNESS SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING S1.10 mm And Manage Volume 1.10 mm FURNITURE LEG RESISTANCE No craks, no damage colon 1.10 mm FURNITURE LEG RESISTANCE No craks, no damage colon 1.10 mm FURNITURE LEG RESISTANCE SUITANCE AND CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE MANAGE SUITABLE MANAGE VERY GOOD SUITABLE MANAGE SUI	FIRE RESISTANCE	Bfl-S1
SLIP RESISTANCE RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SILD MM Voraks, no damage ≤0.05% No craks, no damage ≤1.0° ohm 0.25 w/(m.K) Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION 0.25 w/(m.K) 1.10 mm 1.10 mm 4.00 ohm 1.10 ohm 1.10 ohm 1.11 ohm 1.12 ohm 1.13 ohm 1.14 ohm 1.15 ohm 1.16 ohm 1.16 ohm 1.17 ohm 1.18 ohm 1.19 ohm 1.10 ohm 1.10 ohm 1.10 ohm 1.11 ohm 1.12 ohm 1.13 ohm 1.14 ohm 1.15 ohm 1.15 ohm 1.15 ohm 1.16 ohm 1.16 ohm 1.17 ohm 1.18	SCRATCH RESISTANCE	Class T
RESIDUAL INDENTATION FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SION CASTOR CHAIR REAL PROCES AND CASTOR CHAIR RESISTANCE UNDERFLOOR HEATING SUITABLE NO damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE NO damage 27°C	SQUARENESS & STRAIGHTNESS	≤0.35 mm
FURNITURE LEG RESISTANCE CURLING ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING No damage Value Along and Along	SLIP RESISTANCE	DS
CURLING ≤2 mm ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE No damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SIMBLE STANCE Vory good SUITABLE SUITABLE VERY GOOD SUITABLE SUITABLE SUITABLE SUITABLE SUITABLE SUITABLE	RESIDUAL INDENTATION	≤1.10 mm
ELECTRICAL RESISTANCE DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Volume 10° ohm 0.25 w/m.K) 0.25 w/(m.K) 1.25 w/m.K) 1.25 w/m.K) 1.26 w/m.K) 1.26 w/m.K) 1.26 w/m.K) 1.27 w/m.K) 1.28 w/m.K) 1.29 ohm 1.20	FURNITURE LEG RESISTANCE	No craks, no damage
DIMENSIONAL STABILITY Norm: ≤0.25% - Average result measured: ≤0.05% HEAT INSULATION 0.25 w/(m.K) THERMAL RESISTANCE R 0.0154 m2.k/W ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE No damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	CURLING	≤2 mm
HEAT INSULATION THERMAL RESISTANCE R 0.0154 m2.k/W ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING 0.25 w/(m.K) 0.0154 m2.k/W E1 4 dB (tbc) Coastor Chair Resistance Very good Stain Resistance Very good Stain Resistance Very good Suitable, max 27°C	ELECTRICAL RESISTANCE	≤10 ⁹ ohm
THERMAL RESISTANCE R ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING U.0154 m2.k/W 2 k/W 4 dB (tbc) County 4 dB (tbc) Very good Very good STAIN RESISTANCE Very good Suitable, max 27°C	DIMENSIONAL STABILITY	Norm: ≤0.25% - Average result measured: ≤0.05%
ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING SUITABLE VEVEN SUITABLE VIVIANCE SUITABLE SUITAB	HEAT INSULATION	0.25 w/(m.K)
FORMALDEHYDE GROUP ACOUSTIC INSULATION CASTOR CHAIR RESISTANCE STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING E1 Ad B (tbc) Very good Very good Suitable, max 27°C	THERMAL RESISTANCE R	0.0154 m2.k/W
ACOUSTIC INSULATION 4 dB (tbc) CASTOR CHAIR RESISTANCE No damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	ELECTROSTATIC PERFORMANCE	<2 kV
CASTOR CHAIR RESISTANCE No damage to wear layer, no delamination STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	FORMALDEHYDE GROUP	E1
STAIN RESISTANCE Very good LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	ACOUSTIC INSULATION	4 dB (tbc)
LIGHT FASTNESS ≤ 6 UNDERFLOOR HEATING Suitable, max 27°C	CASTOR CHAIR RESISTANCE	No damage to wear layer, no delamination
UNDERFLOOR HEATING Suitable, max 27°C	STAIN RESISTANCE	Very good
	LIGHT FASTNESS	≤ 6
WARRANTY (YEAR) 12 Residential / 5 Commercial	UNDERFLOOR HEATING	Suitable, max 27°C
	WARRANTY (YEAR)	12 Residential / 5 Commercial

































BILL OF QUANTITIES VERSO unique click vinyl flooring by Van Dyck Floors with plank sizes 187 by 1251mm and a 4.2mm overall thickness, fitted in accordance with the supplier's installation instructions.























BILL OF QUANTITIES:

Athena Woven Vinyl Tiles by Van Dyck Carpets in 50cm x 50cm size with an overall thickness of 3mm, fitted in accordance with the suppliers installation instructions.

PRODUCT GUARANTEE:

Athena Woven Vinyl Tiles are guaranteed for a period of 20 years for Heavy Commercial applications and lifetime for Residential applications, provided that they have been fitted correctly and maintained in accordance with the manufacturers instructions. Full terms and conditions of the guarantee are available on request.

Packaging Size	4m² per box
Tile Size	50 x 50 cm
Fire Rating	Bfl-s1 (EN 13501-1)
Anti-Slip Category	EN 13893
Light Fastness	6 (ISO 105-B02)
Electrical Behaviour	2.1kV (ISO 1815)
Thermal Conductivity	EN12667
Castor Wheel Traffic	No Effect (EN425)
Residual Indentation	0.08mm (EN 433)
Dimensional Stability	Pass (EN434)
Curling	Pass (EN434)
Sound Reduction	9dB (ISO 140-8)
VOC Tested	Pass
Country Of Origin	Fully Imported



Slip Resistant



Water Resistant



Quiet




Indoor /

Klassikos

The Klassikos range offers a rival to carpet tiles with flexibility in design encompassing 3D texture across several weaves and tones, ensuring a practical and exciting flooring solution for any commercial area.






















Zoiros

Zoiros, the Greek word for 'vibrant' perfectly describes this collection. All designed with the same weave, the colours in the Zoiros range mix and match with each other to create bright interiors, or they can be used to create colourful spot tiles when mixed with the Klassikos range. The Zoiros colours also coordinate with the Sentoni Stripe range, facilitating the creation of zones in the commercial environment.

















Pergo Living Expression Aqua Safe

PRODUCT INFORMATION LEYEL OF USE TOTAL THICKNESS 8 mm PROTECTION Titan X (Provides Protection against wear, scratch & impact) CLICK Perfect fold 3.0 Connection TOTAL WEIGHT G/M² 6.748kg/m² BEVELS 4V SIZE & PACKAGING PLANKS 190 x 1380 mm (Modern Plank) BOX PLANKS 1.835 m²/box (7 pcs/box) TEST RESULTS WEAR RESISTANCE WEAR CLASS IIPACT RESISTANCE IC 2 FIRE RESISTANCE Cf1 - s1 SCRATCH RESISTANCE Charge ≥ 5N SLIP RESISTANCE US SULT RESISTANCE US SULT RESISTANCE Charge ≥ 5N SLIP RESISTANCE US SULT RESISTANCE FURNITURE LEG RESISTANCE DS FURNITURE LEG RESISTANCE FURNITURE LEG RESISTANCE O.06m² K/W MOISTURE SWELLING LECTROSTATIC PERFORMANCE C2.0 kV FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE No change STAIN RESISTANCE Class 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE LIGHT FASTNESS Class >6 UNDERLOOR HEATING WATER RESISTANCY (YEAR) UN RESIGNANTY (YEAR) US RESIGENTIAL (10 request up to 10 years)		
TOTAL THICKNESS PROTECTION CLICK Perfect fold 3.0 Connection TOTAL WEIGHT G/M² BEVELS SIZE & PACKAGING PLANKS BOX PLANKS TEST RESULTS WEAR RESISTANCE WEAR CLASS IMPACT RESISTANCE SCRATCH RESISTANCE SCRATCH RESISTANCE FURNITURE LEG RESISTANCE DIMENSIONAL STABILITY HEAT RESISTANCE DIMENSIONAL STABILITY WEAR RESISTANCE DIMENSIONAL STABILITY WEAR RESISTANCE O.06m² K/W MOISTURE SWELLING ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE SCASS (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) SITIAN X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) AV TITAN X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Titan X (Provides Protection against wear, scratch & impact) Totan X (Provides Protection against wear, scratch & impact) Totan X (Provides Protection against wear, scratch & impact to A. V Totan X (Provides Protection against wear, scratch & impact to A. V Totan X (Provides Protection against wear, scratch & impact to A. V Totan X (Provides Protection against wear, scratch & impact to A. V Totan X (Provides Protection against wear, scratch & impact to A. V Totan X (Provides Protection against wear, protection against protection againstee for a protection against wear, protection against protection a	PRODUCT INFORMATION	
PROTECTION Titan X (Provides Protection against wear, scratch & impact) CLICK Perfect fold 3.0 Connection 6.748kg/m² BEVELS 4V SIZE & PACKAGING PLANKS BOX PLANKS 190 x 1380 mm (Modern Plank) BOX PLANKS 1.835 m²/box (7 pcs/box) TEST RESULTS WEAR RESISTANCE WEAR RESISTANCE WEAR CLASS 32/AC 4 IMPACT RESISTANCE SCRATCH RESISTANCE Charge ≥ 5N SLIP RESISTANCE SLIP RESISTANCE FURNITURE LEG RESISTANCE DS FURNITURE LEG RESISTANCE DIMENSIONAL STABILITY HEAT RESISTANCE O.06m² K/W MOISTURE SWELLING ELECTROSTATIC PERFORMANCE C2.0 kV FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE No Change STAIN RESISTANCE No Change STAIN RESISTANCE No Change STAIN RESISTANCE SCIASS 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE Class 5 UNDERLOOR HEATING Suitable WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	LEVEL OF USE	Light Commercial/ Heavy Residential
$ \begin{array}{c} \text{CLICK} & \text{Perfect fold 3.0 Connection} \\ \text{TOTAL WEIGHT G/M}^2 & 6.748 \text{kg/m}^2 \\ \text{BEVELS} & 4V \\ \text{SIZE & PACKAGING} \\ \text{PLANKS} & 190 \times 1380 \text{ mm (Modern Plank)} \\ \text{BOX PLANKS} & 1.835 \text{ m}^2/\text{box} (7 \text{ pcs/box}) \\ \text{TEST RESULTS} \\ \text{WEAR RESISTANCE} & \geq 4000 \\ \text{WEAR CLASS} & 32/\text{AC 4} \\ \text{IMPACT RESISTANCE} & \text{IC 2} \\ \text{FIRE RESISTANCE} & \text{CfI - s1} \\ \text{SCRATCH RESISTANCE} & \text{DS} \\ \text{SUIP RESISTANCE} & \text{DS} \\ \text{FURNITURE LEG RESISTANCE} & \text{No visible damage} \\ \text{DIMENSIONAL STABILITY} & \text{Variation after changes in relative humidity: } \leq 0.9 \text{mm} \\ \text{HEAT RESISTANCE} & 0.06 \text{m}^2 \text{ K/W} \\ \text{MOISTURE SWELLING} & \leq 15\% \\ \text{ELECTROSTATIC PERFORMANCE} & < 2.0 \text{ kV} \\ \text{FORMALDEHYDE GROUP} & < 0.01 \text{ ppm} \\ \text{CASTOR CHAIR RESISTANCE} & \text{No Change} \\ \text{STAIN RESISTANCE} & \text{Class 5} (\text{Group 1,2,3}) & \text{Class 4 (Group 4})} \\ \text{BURNING CIGARETTE} & \text{Class 5} \\ \text{LIGHT FASTNESS} & \text{Class >6} \\ \text{UNDERLOOR HEATING} & \text{Suitable} \\ \text{WARRANTY (YEAR)} & 25 \text{ Residential / 3 Commercial (on request up to 10 years)} \\ \end{array}$	TOTAL THICKNESS	8 mm
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	PROTECTION	Titan X (Provides Protection against wear, scratch & impact)
BEVELS 4V SIZE & PACKAGING PLANKS 190 x 1380 mm (Modern Plank) 1.835 m²/box (7 pcs/box) TEST RESULTS WEAR RESISTANCE ≥ 4000 WEAR CLASS 32/AC 4 IMPACT RESISTANCE IC 2 FIRE RESISTANCE Cfl - s1 SCRATCH RESISTANCE DS FURNITURE LEG RESISTANCE DS No visible damage DIMENSIONAL STABILITY Variation after changes in relative humidity: ≤ 0,9mm HEAT RESISTANCE 0.06m² K/W MOISTURE SWELLING ≤15% ELECTROSTATIC PERFORMANCE < 2.0 kV FORMALDEHYDE GROUP < 0.01 ppm CASTOR CHAIR RESISTANCE No Change STAIN RESISTANCE No Change STAIN RESISTANCE STAIN RESISTANCE STAIN RESISTANCE STAIN RESISTANCE STAIN RESISTANCE No Change STAIN RESISTANCE STAIN RESI	CLICK	Perfect fold 3.0 Connection
$SIZE \& PACKAGING \\ PLANKS & 190 \times 1380 \text{ mm (Modern Plank)} \\ BOX PLANKS & 1.835 \text{ m²/box (7 pcs/box)} \\ TEST RESULTS \\ WEAR RESISTANCE & \geq 4000 \\ WEAR CLASS & 32/AC 4 \\ IMPACT RESISTANCE & IC 2 \\ FIRE RESISTANCE & Cfl - s1 \\ SCRATCH RESISTANCE & DS \\ FURNITURE LEG RESISTANCE & No visible damage \\ DIMENSIONAL STABILITY & Variation after changes in relative humidity: \leq 0.9 \text{mm} = 0.06 \text{m}^2 \text{ K/W} = 0.06 \text{ K/W} = 0.06 \text{ M/W} = 0.06 $	TOTAL WEIGHT G/M ²	6.748kg/m ²
PLANKS 190 x 1380 mm (Modern Plank) BOX PLANKS 1.835 m²/box (7 pcs/box) TEST RESULTS WEAR RESISTANCE \geq 4000 WEAR CLASS 32/AC 4 IMPACT RESISTANCE IC 2 FIRE RESISTANCE Cfl - s1 SCRATCH RESISTANCE DS FURNITURE LEG RESISTANCE No visible damage DIMENSIONAL STABILITY Variation after changes in relative humidity: ≤ 0,9mm HEAT RESISTANCE 0.06m² K/W MOISTURE SWELLING \leq 15% ELECTROSTATIC PERFORMANCE $<$ 2.0 kV FORMALDEHYDE GROUP $<$ 0.01 ppm CASTOR CHAIR RESISTANCE No Class 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE Class 5 LIGHT FASTNESS Class >6 UNDERLOOR HEATING Suitable WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	BEVELS	4V
BOX PLANKS 1.835 m²/box (7 pcs/box) TEST RESULTS WEAR RESISTANCE ≥ 4000 WEAR CLASS 32/AC 4 IMPACT RESISTANCE IC 2 FIRE RESISTANCE Cfl - s1 SCRATCH RESISTANCE DS FURNITURE LEG RESISTANCE No visible damage DIMENSIONAL STABILITY Variation after changes in relative humidity: ≤ 0,9mm HEAT RESISTANCE 0.06m² K/W MOISTURE SWELLING ≤15% ELECTROSTATIC PERFORMANCE < 2.0 kV FORMALDEHYDE GROUP <0.01 ppm CASTOR CHAIR RESISTANCE No Class 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE Class 5 LIGHT FASTNESS Class >6 UNDERLOOR HEATING Suitable WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	SIZE & PACKAGING	
TEST RESULTS WEAR RESISTANCE WEAR CLASS IMPACT RESISTANCE IC 2 FIRE RESISTANCE SCRATCH RESISTANCE SLIP RESISTANCE DS FURNITURE LEG RESISTANCE DIMENSIONAL STABILITY MOISTURE SWELLING ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE STAIN RESISTANCE No visible damage Variation after changes in relative humidity: ≤ 0.9 mm ≤ 0.06 mm	PLANKS	190 x 1380 mm (Modern Plank)
WEAR RESISTANCE≥ 4000WEAR CLASS $32/AC$ 4IMPACT RESISTANCEIC 2FIRE RESISTANCE $Cfl - s1$ SCRATCH RESISTANCE $Charge ≥ 5N$ SLIP RESISTANCEDSFURNITURE LEG RESISTANCENo visible damageDIMENSIONAL STABILITYVariation after changes in relative humidity: $≤ 0,9mm$ HEAT RESISTANCE $0.06m^2$ K/WMOISTURE SWELLING $≤15\%$ ELECTROSTATIC PERFORMANCE <2.0 kVFORMALDEHYDE GROUP <0.01 ppmCASTOR CHAIR RESISTANCENo ChangeSTAIN RESISTANCEClass 5 (Group 1,2,3) & Class 4 (Group 4)BURNING CIGARETTEClass 5LIGHT FASTNESSClass >6UNDERLOOR HEATINGSuitableWARRANTY (YEAR)25 Residential / 3 Commercial (on request up to 10 years)	BOX PLANKS	1.835 m ² /box (7 pcs/box)
WEAR CLASS $32/AC$ 4IMPACT RESISTANCEIC 2FIRE RESISTANCECfI - s1SCRATCH RESISTANCECharge ≥ 5NSLIP RESISTANCEDSFURNITURE LEG RESISTANCENo visible damageDIMENSIONAL STABILITYVariation after changes in relative humidity: ≤ 0,9mmHEAT RESISTANCE $0.06m^2$ K/WMOISTURE SWELLING≤15%ELECTROSTATIC PERFORMANCE<2.0 kV	TEST RESULTS	
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	WEAR RESISTANCE	≥ 4000
FIRE RESISTANCE	WEAR CLASS	32/AC 4
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	IMPACT RESISTANCE	IC 2
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	FIRE RESISTANCE	Cfl - s1
FURNITURE LEG RESISTANCE No visible damage DIMENSIONAL STABILITY Variation after changes in relative humidity: $\leq 0.9 \text{mm}$ HEAT RESISTANCE 0.06m² K/W MOISTURE SWELLING $\leq 15\%$ ELECTROSTATIC PERFORMANCE $< 2.0 \text{ kV}$ FORMALDEHYDE GROUP $< 0.01 \text{ ppm}$ CASTOR CHAIR RESISTANCE No Change STAIN RESISTANCE Class 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE Class 5 LIGHT FASTNESS Class >6 UNDERLOOR HEATING Suitable WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	SCRATCH RESISTANCE	Charge ≥ 5N
DIMENSIONAL STABILITY	SLIP RESISTANCE	DS
$\begin{array}{lll} \text{HEAT RESISTANCE} & 0.06\text{m}^2 \text{ K/W} \\ \text{MOISTURE SWELLING} & \leq 15\% \\ \text{ELECTROSTATIC PERFORMANCE} & <2.0 \text{ kV} \\ \text{FORMALDEHYDE GROUP} & <0.01 \text{ ppm} \\ \text{CASTOR CHAIR RESISTANCE} & \text{No Change} \\ \text{STAIN RESISTANCE} & \text{Class 5 (Group 1,2,3) & Class 4 (Group 4)} \\ \text{BURNING CIGARETTE} & \text{Class 5} \\ \text{LIGHT FASTNESS} & \text{Class >6} \\ \text{UNDERLOOR HEATING} & \text{Suitable} \\ \text{WARRANTY (YEAR)} & 25 \text{ Residential / 3 Commercial (on request up to 10 years)} \end{array}$	FURNITURE LEG RESISTANCE	No visible damage
MOISTURE SWELLING ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE STAIN RESISTANCE BURNING CIGARETTE LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) SUITABLE S15% 22.0 kV C0.01 ppm C0.01 ppm C0.01 ppm C1.02 color 1,2,3) & Class 4 (Group 4) C1.02 color 1,2,3) & Class 5 (Group 4) C1.02 color 1,2,3) & Class 4 (Group 4) C1.03 color 1,2,3) & Class 4 (Group 4) C1.04 color 1,2,3) & Class 4 (Group 4) C1.05 color 1,2,3) & Class 4 (Group 4) C1.06 color 1,2,3) & Class 4 (Group 4) C1.07 color 1,2,3) & Class 4 (Group 4) C1.08 color 1,2,3) & Class 4 (Group 4)	DIMENSIONAL STABILITY	Variation after changes in relative humidity: ≤ 0,9mm
ELECTROSTATIC PERFORMANCE FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE STAIN RESISTANCE BURNING CIGARETTE LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) SULVA (2.0 kV C-2.0	HEAT RESISTANCE	0.06m ² K/W
FORMALDEHYDE GROUP CASTOR CHAIR RESISTANCE STAIN RESISTANCE BURNING CIGARETTE LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) VO.01 ppm No Change Class 5 (Group 1,2,3) & Class 4 (Group 4) Class 5 Class 5 Class >6 UNDERLOOR HEATING WARRANTY (YEAR) VO.01 ppm No Change Class 5 (Group 1,2,3) & Class 4 (Group 4) Class 5 Class 5 Underloor Heating VARRANTY (YEAR) VARRANTY (YEAR) VO.01 ppm No Change Class 5 (Group 1,2,3) & Class 4 (Group 4) Class 5 Class 5 Class >6 UNDERLOOR HEATING VARRANTY (YEAR) VARRANTY (YEAR)	MOISTURE SWELLING	≤15%
CASTOR CHAIR RESISTANCE STAIN RESISTANCE Class 5 (Group 1,2,3) & Class 4 (Group 4) BURNING CIGARETTE Class 5 LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) Suitable 25 Residential / 3 Commercial (on request up to 10 years)	ELECTROSTATIC PERFORMANCE	<2.0 kV
STAIN RESISTANCE BURNING CIGARETTE Class 5 LIGHT FASTNESS UNDERLOOR HEATING WARRANTY (YEAR) Class 5 Class 5 Class >6 Suitable 25 Residential / 3 Commercial (on request up to 10 years)	FORMALDEHYDE GROUP	<0.01 ppm
BURNING CIGARETTE Class 5 LIGHT FASTNESS Class >6 UNDERLOOR HEATING Suitable WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	CASTOR CHAIR RESISTANCE	No Change
LIGHT FASTNESS Class >6 UNDERLOOR HEATING WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	STAIN RESISTANCE	Class 5 (Group 1,2,3) & Class 4 (Group 4)
UNDERLOOR HEATING WARRANTY (YEAR) Suitable 25 Residential / 3 Commercial (on request up to 10 years)	BURNING CIGARETTE	Class 5
WARRANTY (YEAR) 25 Residential / 3 Commercial (on request up to 10 years)	LIGHT FASTNESS	Class >6
	UNDERLOOR HEATING	Suitable
WATER RESISTANCE WARRANTY (YEAR) 10 Residential / 3 Commercial (on request up to 10 years)	,	25 Residential / 3 Commercial (on request up to 10 years)
	WATER RESISTANCE WARRANTY (YEAR)	10 Residential / 3 Commercial (on request up to 10 years)

































BILL OF QUANTITIES

PERGO LIVING EXPRESSION AQUASAFE laminate flooring by Van Dyck Floors with Modern Plank sizes 190 by 1380mm and a 8mm overall thickness, fitted in accordance with the supplier's installation instructions.















Pergo Domestic Elegance

PRODUCT INFORMATION	
LEVEL OF USE	Light Commercial/ Heavy Residential
TOTAL THICKNESS	7 mm
PROTECTION	Titan X (Provides Protection against wear, scratch & impact)
CLICK	Uniclic Connection
TOTAL WEIGHT G/M ²	6.748kg/m ²
BEVELS	None
SIZE & PACKAGING	
PLANKS	190 x 1200 mm (Classic Plank)
BOX PLANKS	1.834 m ² /box (8 pcs/box)
TEST RESULTS	
WEAR RESISTANCE	≥ 4000
WEAR CLASS	32/AC 4
IMPACT RESISTANCE	IC 2
FIRE RESISTANCE	CfI - s1
SCRATCH RESISTANCE	Charge ≥ 5N
SLIP RESISTANCE	DS
FURNITURE LEG RESISTANCE	No change
DIMENSIONAL STABILITY	Variation in length and width: ≤ 0,10mm
HEAT RESISTANCE	0.06m ² K/W
MOISTURE SWELLING	≤15%
ELECTROSTATIC PERFORMANCE	<2.0 kV
FORMALDEHYDE GROUP	<0.020 ppm
CASTOR CHAIR RESISTANCE	No Change
STAIN RESISTANCE	Class 5 (Group 1,2,3) & Class 4 (Group 4)
BURNING CIGARETTE	Class 5
LIGHT FASTNESS	Class >6
UNDERLOOR HEATING	Suitable
WARRANTY (YEAR)	20 Residential / Commercial - on request

































BILL OF QUANTITIES

PERGO DOMESTIC ELEGANCE laminate flooring by Van Dyck Floors with Modern Plank sizes 190 by 1200mm and a 7mm overall thickness, fitted in accordance with the supplier's installation instructions.













Pergo Living Expression Long Plank

PRODUCT INFORMATION	
I FVFL OF USF	Light Commercial/ Heavy Residential
TOTAL THICKNESS	9.5 mm
PROTECTION	Titan X (Provides Protection against wear, scratch & impact)
CLICK	Perfect fold 3.0 Connection
02.01	
TOTAL WEIGHT G/M ²	8.368kg/m ²
BEVELS	4V
SIZE & PACKAGING	005 0050 (1 DL 1)
PLANKS	205 x 2050 mm (Long Plank)
BOX PLANKS	2.52 15 m ² /box (6 pcs/box)
TEST RESULTS	
WEAR RESISTANCE	≥ 4000
WEAR CLASS	32/AC 4
IMPACT RESISTANCE	IC 2
FIRE RESISTANCE	CfI - s1
SCRATCH RESISTANCE	Charge ≥ 5N
SLIP RESISTANCE	DS
FURNITURE LEG RESISTANCE	No change
DIMENSIONAL STABILITY	Variation in length and width: $\leq 0,10\%$
HEAT RESISTANCE	0.06m ² K/W
MOISTURE SWELLING	≤15%
ELECTROSTATIC PERFORMANCE	<2.0 kV
FORMALDEHYDE GROUP	E1 <0.020 ppm
CASTOR CHAIR RESISTANCE	No Change
STAIN RESISTANCE	Class 5 (Group 1,2,3) & Class 4 (Group 4)
BURNING CIGARETTE	Class 5
LIGHT FASTNESS	Class >6
UNDERLOOR HEATING	Suitable
WARRANTY (YEAR)	25 Residential / 3 Commercial


































BILL OF QUANTITIES
PERGO LIVING EXPRESSION
LONG PLANK laminate flooring
by Van Dyck with Long Plank
sizes 205 by 2050mm and a
9.5mm overall thickness, fitted
in accordance with the supplier's
installation instructions.
















Easigrass


Whether you are looking to freshen up a lawn, save water, or if you are creating a whole new garden, investing in EasigrassTM is a great way to transform your outdoor space. EasigrassTM is becoming ever popular due to its low maintenance, realistic look and dream garden appeal. EasigrassTM

Is safe, clean and hygienic for all your pets too. There's no mud or mess, no cutting or weeding and it creates beautiful outdoor spaces for family and friends to enjoy.


























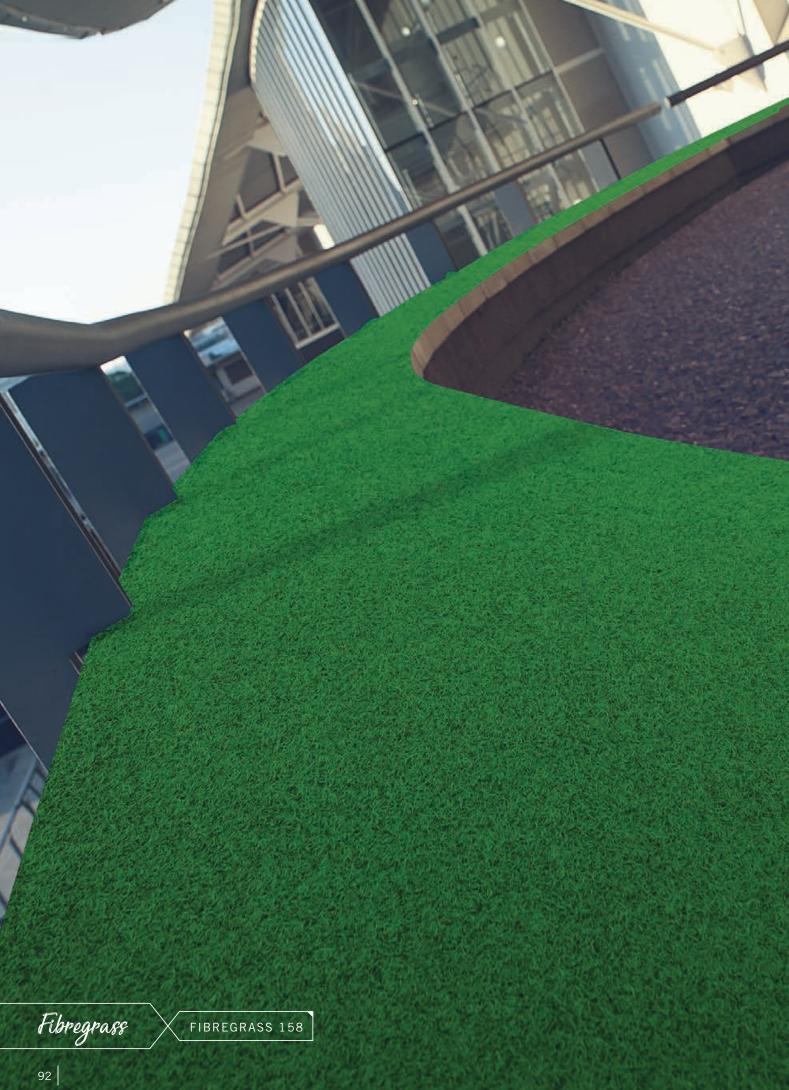

FIBREGRASS

MAINTENANCE

Enhance the performance and appearance of your carpet by following these steps: • Use quality Dirt Off walk mats.

 Vacuum thoroughly and frequently.
 Remove spills and marks immediately.
 General clean by a SETA Qualified cleaner.

HELPFUL HINT

Whilst the light colours in the range are extremely attractive, they are high maintenance. They show soil quicker than dark colours and need frequent cleaning. We accept no liability on soiling, as this is maintenance related and not a manufacturing defect.

BILL OF QUANTITIES

Broadloom: FIBREGRASS 158, 173 and OUTDOOR made from 100% PFX Stain Shield Staple UV Fibre in (colour name), by Van Dyck Carpets, laid in accordance with the code of practice for the installation of textile floor coverings (SANS 10186).

	FIBREGRASS OUTDOOR
Pile Fibre	100% PFX Stain Shield Staple UV Fibre
Backing	Plainback
Fibre weight	860gsm
Total weight	1050gsm
Total thickness	7mm
Protective Finish	Stain Shield
Location grade	General Outdoor, Marine, Automotive and Gyms
Fire rating	2
Width/Size	2m
VOC Rating	Meets requirements green star rating (GBCSA criteria)
Country of Origin	Manufactured in South Africa from local raw materials.

FIBREGRASS 173	FIBREGRASS 158	
100% PFX Stain Shield Staple UV Fibre		
Plainback		
1000gsm 720gsm		
1170gsm	860gsm	
7mm	4.5mm	
Stain Shield		
Outdoor Cricket, Indoor Soccer, General purpose, Action Cricket, General Sports Facilities. Putt-Putt, Sports Facilities.		
2		
2.50m		
Meets requirements green star rating (GBCSA criteria)		
Manufactured in South Africa from local raw materials.		
	100% PFX Stain Shield Staple U Plainback 1000gsm 1170gsm 7mm Stain Shield Outdoor Cricket, Indoor Soccer, General Sports Facilities. 2 2.50m Meets requirements green star	

NB: Minimum made to order $1200m^2$ per colour.



Made in South Africa



Guarantee



10 Year Warrantee



ISO Certification



Stain Shield Protected



Torture Tunnel Tested



Anti-allergenic



FIBREGRASS 158















ADD A GREEN TOUCH TO THE OFFICE WITH OUR ENVIRONMENTALLY FRIENDLY UNDERLAYS: ECOLAY 2,5 MM, 3 MM, 5 MM AND 6.5 MM

BENEFITS OF ECO-LAY

- Environmentally friendly and fully RECYCLABLE
- Increases floor covering lifespan
- Highest quality recycled rubber
- 2m wide for lower wastage
- Unaffected by moisture
- Thermal Insulation
- NON-absorbent & Rot resistant
- NOT air filled so NON- collapsing
- Excellent rebound
- Anti-fatigue
- Anti-microbial
- High performance & appearance retention

- Conforms to local and international fire and compression tests
- Ideal for Stairs
- Comfort Underfoot
- Absorbs Noise
- Contains Anti-Static properties
- Protects Floor Coverings
- Saves Energy
- Under Carpet Heating
- Suspended Wood Floors Seals the floors preventing dust flow
- Improve Vacuuming
- Anti-Allergenic
- 10 Year Guarantee









Instalay

Details	InstaLay 25	InstaLay 30	InstaLay 50
Compound	Minimum 80%	Minimum 80%	Minimum 80%
	recycled rubber crumb	recycled rubber crumb	recycled rubber crumb
Bonding Agent	Synthetic latex	Synthetic latex	Synthetic latex
Backing Type	Non-Woven Polypropylene	Non-Woven Polypropylene	Non-Woven Polypropylene
Thickness	2.5mm	3mm	5mm
Weight	1.13 kg/m² / 0.23 lb/ft²	1.3 kg/m² / 0.27 lb/ft²	2.0 kg/m ² / 0.41 lb/ft ²
Density	452 kg/m³ / 28.2 lb/ft³	443 kg/m³ / 27.6 lb/ft³	400 kg/m³ / 25.0 lb/ft³
Roll Size	1m x 15m / 3' 3" x 49' 2"	1m x 15m / 3' 3" x 49' 2"	1m x 10m / 3' 3" x 32' 10"
Area	15m ² / 161.4ft ²	15m ² / 161.4ft ²	10m ² / 107.6 ft ²
Roll Weight	17 kg / 37.5 lb	20 kg / 44.1 lb	20 kg / 44.1 lb
Thermal Resistance	0.43 togs	0.60 togs	0.83 togs
BS 4745:2005 (ISO 5085-1:1989)			
Measured Improvement of	17dB *	23dB *	26dB *
Impact Sound (ΔLw)			
BS EN ISO 140-8:1998			
Impact Insulation Class (IIC)	49 *	55 *	58 *
ASTM - E492-09		63 **	
Odour	No Objectionable Odour	No Objectionable Odour	No Objectionable Odour
Volatile Organic Compound (VOC)	_	0.029 mg/m ² /hr (low VOC emission)	_
Reaction to Fire	-	Class CFL-S1***	-
BS EN ISO 9239-1:2002			



Carpet Tiles / Carpet

- Carpet Tiles
- Broadloom Carpet
- Natural Floor Coverings



Wood / Laminate

- Solid Wood
- Engineered Wood
- Bamboo
- Laminate
- Parquet Flooring



- Luxury Vinyl Tiles
- Woven Vinyl Tiles
- Ceramic and Porcelain Tiles
- Natural Stone Tiles



EnlipoBuld


Material composition	100% South African Recycled motor vehicle and truck tyres, Polyurethane binder, iron oxide pigment.				
Source of materials	All Materials are locally sourced, making EnviroBuild products proudly South African.				
Surface texture and decoration	Crumb Rubber moulded texture with various decorative patterns. Products reduce sound of pedestrian and vehicle traffic and have a high safety factor compared with conventional products.				
Weight	± 1100kg/m³, depending on hardness(density).				
Hardness	Various, depending on application requirements.				
Colours	Black, Grey, Redwood, Brown, Green, Blue				
Maintenance	Recycled rubber paving is extremely tough and resilient to damage and stains. EnviroBuild paving and flooring products has virtually zero water or chemical absorption, resulting in no oil absorption from leaking vehicles, accidental spills, etc. These factors make EnviroBuild products very easy to maintain. Simply hose or sweep off dirt and dust. For more aggressive dirt, simply clean with a cloth/mop dipped in a soapy water mixture or use a high pressure cleaner. Damaged pavers can easily be lifted/extracted and replaced.				
Modularity	EnviroBuild products are interlocked, lap seamed or interconnected and can be opened for tree root maintenance, seismic adjustment, side walk relocation, etc.				

All products are available in the following colours:

Black	Grey	Brown	Green	Blue	Redwood

A variety of other colours and speckled combinations can be made on request depending on the order volume.

Innovative recycled products that are 100% recyclable at the end of their lifespan.

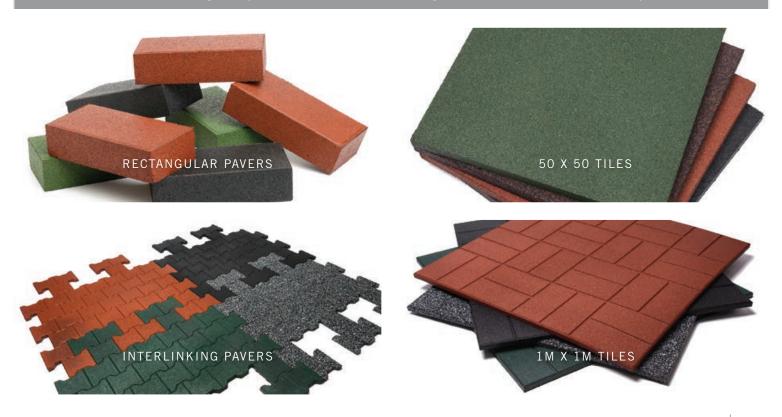



COMMERCIAL CARPETING RESIDENTIAL CARPETING LAMINATES & LVTS WALL COVERINGS ARTIFICIAL GRASS UNDERLAYS AND RUBBER FLOORING

Toll Free: 0800 CARPET (0800227738) www.vandyckfloors.co.za



FOLLOW US ON: Facebook, Twitter, Instagram, LinkedIn, Pinterest & YouTube













