


Inner pull-out – BOXCAP – design element – E

Web code

DQJAEM


Planning

Space requirement in cabinet

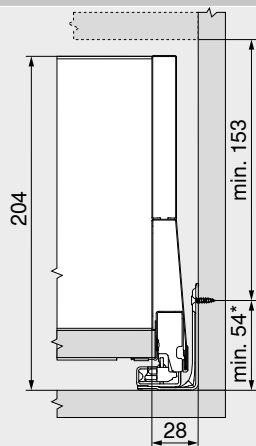

* +1 mm if cabinet profile is installed before the cabinet is assembled

Installation dimensions – back

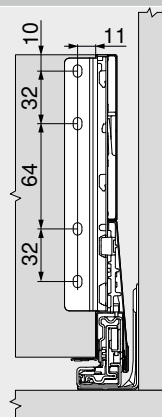

Hole spacing – cabinet profiles


Cabinet profile 450 – 40 kg

Nominal length NL (mm)




270 | 300 | 350

400 | 450 | 500 | 550 |

600



Cutting – 16 mm chipboard




KB Cabinet width
LW Internal cabinet width
NL Nominal length

Cabinet profile 453 – 70 kg


Nominal length NL (mm)

450 | 500 | 550

600

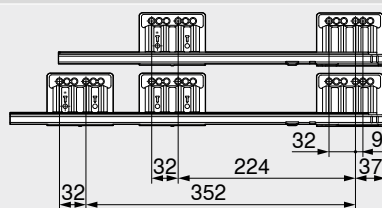

Cutting – design element



Design element	X (mm)	Y (mm)
Low	LW – 104	75
High	LW – 104	142.5
LW	Internal cabinet width	

The given dimensions in combination with MERIVOBX do not require "impact testing for vertically installed glass parts" as per the DIN EN 14749 norm June 2016. For norm compliance no safety glass is required. The edge is a polished flat-ended edge with a 1 mm ±0.5 mm bevel.

Internal cabinet depth LT min. = nominal length NL + 3 mm

Reference pages

Overview – MERIVOBX
Fixing system for thin fronts – EXPANDO T

257

CABLOXX

582

Assembly, removal and adjustment

584

Design element

290

584

Accessories

291

Assembly recommendation and limitation of liability – EXPANDO T

585

Cabinet profile fixing positions

295

Short URL

Overview – SERVO-DRIVE for LEGRABOX | MERIVOBX | TANDEMBOX

359

Overview – assembly devices

591

www.blum.com/a355

Overview – TIP-ON BLUMOTION for MERIVOBX

297

Overview – AMBIA-LINE for LEGRABOX | MERIVOBX

529

698

