En Liro-foil


The ultimate choice in roofing insulation



199 (FR rated)

- SINGLE SIDED METALIZED / WOVEN ROOFING INSULATION FOR RESIDENTIAL BUILDINGS AND PROPERTY DEVELOPMENT
- TO BE USED UNDER TILES, SLATE OR FIBRE CEMENT ROOFS
- ASTM E84 -10b APPROVED Fire Rating

199 Econo Barrier Film structure





- COST EFFECTIVE, NON-TEAR, STRONG AND DURABLE
- RADIANT HEAT AND MOISTURE VAPOUR BARRIER
- DESIGNED FOR EASY HANDLING AND INSTALLATION
- OFFERS SUPERIOR QUALITY AT A FRACTION OF THE BUILDING COST
- SYSTEM THERMAL INSULATION : $(m^2K)/w = 0.59$ min value (both sides)

Alucushion Thermal Insulation (Pty) Ltd

Head Office: Tel (012) 800 3606 Fax (012) 800 3835 E-mail: sales@alucushion.co.za






200 (FR rated)

- DOUBLE SIDED ALUMINIUM ROOFING INSULATION FOR RESIDENTIAL BUILDINGS AND PROPERTY DEVELOPMENT
- TO BE USED UNDER ALL RESIDENTIAL ROOFING APPLICATIONS
- SANS 1381 4 / SABS 1381 4 : 1985 / ASTM E 84 CLASS 1 FIRE RATING

Econo 200 structure

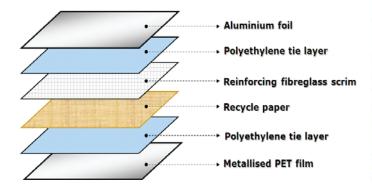



- COST EFFECTIVE, NON-TEAR, STRONG AND DURABLE
- RADIANT HEAT AND MOISTURE VAPOUR BARRIER
- DESIGNED FOR EASY HANDLING AND INSTALLATION
- OFFERS SUPERIOR QUALITY AT A FRACTION OF THE BUILDING COST
- SYSTEM THERMAL INSULATION : (m²K)/w = 0.9 min value

Alucushion Thermal Insulation (Pty) Ltd

Head Office: Tel (012) 800 3606 Fax (012) 800 3835

E-mail: sales@alucushion.co.za www.alucushion.co.za






201 (FR rated)

- SINGLE SIDED ALUMINIUM / WOVEN ROOFING INSULATION FOR RESIDENTIAL BUILDINGS AND PROPERTY DEVELOPMENT
- TO BE USED UNDER TILES, SLATE OR FIBRE CEMENT ROOFS
- SANS 1381 4 / SABS 1381 4 : 1985 / ASTM E 84 CLASS 1 FIRE RATING

En<u>virotuff</u> 201 Structure

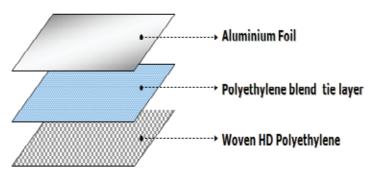



- COST EFFECTIVE, NON-TEAR, STRONG AND DURABLE
- RADIANT HEAT AND MOISTURE VAPOUR BARRIER
- DESIGNED FOR EASY HANDLING AND INSTALLATION
- OFFERS SUPERIOR QUALITY AT A FRACTION OF THE BUILDING COST
- SYSTEM THERMAL INSULATION: $(m^2K)/w = 0.8$ min value

Alucushion Thermal Insulation (Pty) Ltd

Head Office: Tel (012) 800 3606 Fax (012) 800 3835

E-mail: sales@alucushion.co.za






202 (FR rated)

- DOUBLE SIDED RE-ENFORCED ALUMINIUM ROOFING INSULATION FOR RESIDENTIAL BUILDINGS AND PROPERTY DEVELOPMENT
- TO BE USED UNDER ALL RESIDENTIAL ROOFING APPLICATIONS
- SANS 1381 4 / SABS 1381 4 : 1985 / ASTM E 84 CLASS 1 FIRE RATING

En\sqrt{irotuff} *202 Structure

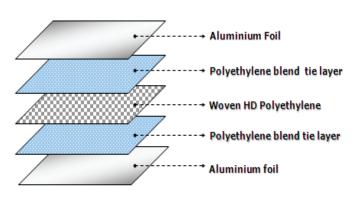



- COST EFFECTIVE, NON-TEAR, STRONG AND DURABLE
- RADIANT HEAT AND MOISTURE VAPOUR BARRIER
- DESIGNED FOR EASY HANDLING AND INSTALLATION
- OFFERS SUPERIOR QUALITY AT A FRACTION OF THE BUILDING COST
- SYSTEM THERMAL INSULATION: $(m^2K)/w = 1.2$ min value

Alucushion Thermal Insulation (Pty) Ltd

Head Office: Tel (012) 800 3606 Fax (012) 800 3835 E-mail: sales@alucushion.co.za






203FR

- DOUBLE SIDED ALUMINIUM ROOFING INSULATION FOR COMMERCIAL AND INDUSTRIAL INSTALLATIONS
- TIASA ACCREDITED: SANS 428: B/B1/2/H only USP
- SANS 1381 4 / SABS 1381 4 : 1985 / ASTM E 84 CLASS 1 FIRE RATING

ET203FR structure

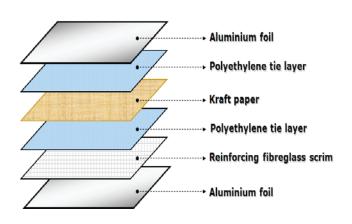



- COST EFFECTIVE, STRONG, RIGID AND DURABLE
- RADIANT HEAT AND CLADDING INSULATION BARRIER
- DESIGNED FOR EASY HANDLING AND INSTALLATION
- OFFERS SUPERIOR QUALITY AT A FRACTION OF THE BUILDING COST
- SYSTEM THERMAL INSULATION: $(m^2K)/w = 1.2$ min value

Alucushion Thermal Insulation (Pty) Ltd

Head Office: Tel (012) 800 3606 Fax (012) 800 3835

E-mail: sales@alucushion.co.za

