




OFFER YOUR BUSINESS
THE ULTIMATE IN
SECURITY AND
PROTECTION

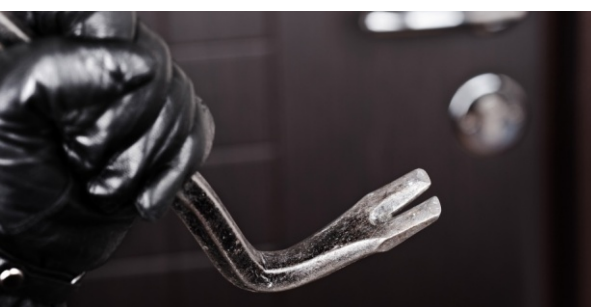

DIAMOND

BURGLARY-RESISTANT RECORD AND STRONG ROOM DOORS

KEY FEATURES

- The Diamond range of doors consists of a non-categorised record room door, and category 1 - category 3 strong room doors certified to SANS 949-1977 standards.
- The door is finished with zinc
- Chromate rust resistant grey primer, ensuring long life-span of the door
- Moving bolt work with fixed back rebate
- The frame is designed in such a way that it allows for hasslefree installation in a fully finished wall opening
- The door is fitted with seven-lever key lock/s offering about 10 000 differs. The lock has a minimum of three anti-pick levers
- Record room doors certified up to CAT 2 can be fitted with solid fire resistant panelling that does not deteriorate with age for one or two hour fire protection



DIAMOND


PRODUCT SPECIFICATIONS

Model	Wall opening Height (mm)	Wall opening Width (mm)	Clearance 90° Height (mm)	Clearance 90° Width (mm)	Clearance 180° Height (mm)	Clearance 180° Width (mm)	Weight (kg)	Boltwork	Barrier (mm)
Record	1935	870	1880	770	1880	830	140	4 x 25mm locking bolts	6mm steel plate
CAT1	1935	870	1880	766	1880	830	200	4 x 25mm locking bolts	10mm steel plate
CAT2 L/D	1935	870	1880	764	1880	830	240	4 x 25mm locking bolts	12mm steel plate
CAT2 H/D	1935	870	1880	758	1880	830	330	6 x 25mm locking bolts	20mm steel plate
CAT2ADM	1935	850	1895	665	1895	770	384	4 x 32mm 1-way moving	50mm Borox™ SP barrier material
CAT3	1940	850	1895	665	1895	770	450	6 x 32mm 3-way moving	50mm Borox™ SP barrier material



SABS CATEGORY RATING

Record - no rating
Category 1
Category 2
Category 2ADM
Category 3



STANDARD LOCKING

Record - 1x Key lock
Category 1 - 1x Key lock
Category 2 - 2x Key locks
Category 2ADM - 2x Key locks
Category 3 - 2x Key locks



LOCKING OPTIONS

Manual combination dials or a range of electronic locks with various features are available at an additional cost

VENTILATORS

It is advisable that strong rooms be adequately ventilated for the benefit of staff and also to prevent documents and other articles being damaged by moisture.

In the event of fire, the ventilator is manufactured to automatically shut when the temperature reaches 100°C, starving the fire of oxygen and extinguishing it with limited damage to documents and other articles.

Chubb safes can provide you with either double- or single-sided ventilators, dependant on the thickness of our wall.

PLANNING, DELIVERY & INSTALLATION

Gunnebo can offer you a comprehensive installation survey (location dependant).

Gunnebo is focussed on making sure the service on offer is achievable, to the highest standards of workmanship and is promptly completed within the contract time scale.

Authorised dealer

www.chubbsafes.com