

GYPROC EXTRA-HEIGHT WALL SYSTEM

Details are NOT PROJECT SPECIFIC and need to be approved by a project professional before use to ensure that they meet with the specific project requirements. DRAWINGS NOT TO BE MODIFIED OR SCALED to suite without approval. **DRAWINGS FOR INFORMATION ONLY.** Construction concept only which is applicable to any Stud size and Board type. The detail should be read in conjunction with Saint-Gobain current literature available on www.gyproc.co.za. Systems need to be built to full height from structural floor to structural soffit to achieve fire and acoustic performance.

Gyproc Extra-Height Wall System 150F60


	60 min	L/250 at 200Pa		L/125 at 200Pa		System Nominal Thickness	Framework Height	Cladding Height	Duty Rating	Deflection allowance
		Stud Spacing centres	Max Height	Stud Spacing centres	Max Height					
		300 mm	9500 mm	300 mm	11800 mm	180 mm	To underside of structural soffit	Full height	Severe	Project Specific
	-	400 mm	8700 mm	400 mm	10800 mm					
	29 kg/m ²	600 mm	7800 mm	600 mm	9700 mm					

System Overview

Side 1 consisting of outer layer RhinoBoard® FireStop® 15 mm (1). Side 2 consisting of outer layer RhinoBoard® FireStop® 15 mm (2) (locally manufactured, ISO 9001 & 14001 certification, recycled paper content, Ecospecifier, Greentag level B listing, non-combustible to SANS 10177-5) fixed to both sides of the frameworks using Gyproc Jack-point Screws 25 mm (face layer) at maximum 220 mm centres. Gypframe® UltraSTEEL® I-Studs 150 mm x 0.9 mm (3) (locally manufactured, Recycled content, ISO 9001 & 14001 certification) friction fitted into top and bottom Gypframe® UltraSTEEL® Tracks 152 x 0.9 mm (4) at 600 mm centres. Floor and head tracks fixed with two lines of fixings (by others) staggered at 300 mm centres located not more than 25 mm from the track flanges and 150 mm from the ends of the track and any door openings. Install Gypframe® UltraSTEEL® I-Studs 150 mm x 0.9 mm at abutments, terminations, openings, T-junctions and corners. Fix 51 mm x 25 mm Gyproc Galvanised Angle to support horizontal edges of the face layer lining. Apply Gyproc RhinoTape® to all joints and internal corners. Install Gypframe® Corner Bead to all external corners. No insulation required. For Skimmed Finish: Cover entire drywall surface with 1 layer of Gyproc RhinoLite®. For Jointed finish: Cover Gyproc RhinoTape® with 2 coats of Gyproc RhinoGlide® (5) (locally manufactured). Apply sealant (supplied by others) between the building structure and the drywall framework. Bulk fill the gaps at the base of the drywall and any gaps exceeding 5 mm using Gyproc RhinoLite® or Gyproc RhinoGlide®.

System Details

Downloadable BIM files can be found at
Saint-Gobain BIM Library:
<https://bimlibrary.saint-gobain.com>

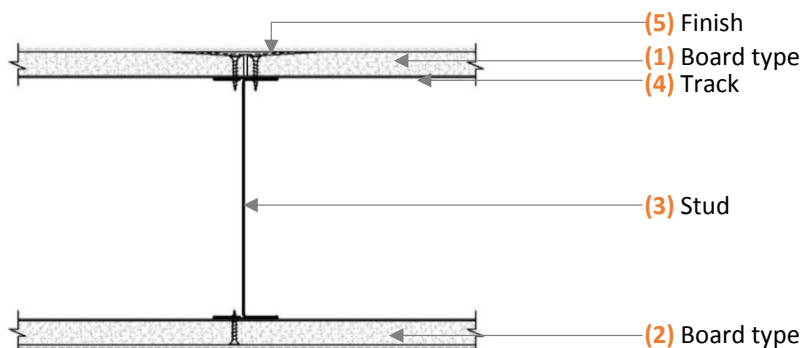

Details shown are subject to accuracy of information provided to Saint-Gobain at the time the drawings were originally requested. No duty of care is owed to the recipient or any other third party and Saint-Gobain does not accept any liability in respect of details shown. This Saint-Gobain system detail must not be used without a complete evaluation by owner's design professional to verify the suitability of its use with your specific application. **The detail should be read in conjunction with Saint-Gobain current literature. Refer to literature and clauses at <https://www.gyproc.co.za/>.**