



INFRASET

THE AVENG GROUP



| G-Blok™ |





G-Blok™

The photographs in this brochure do not necessarily reflect actual product colours.

G-Blok™, the paving surface that will provide a good, durable, load bearing and riding surface, requiring little maintenance.

G-BLOK™ PRECISION SAVES MONEY

- You need less base layers because the precision-made interlocking G-Blok™ form an integral part of the structure, carrying and spreading the load.
- There is little maintenance as the interlocking action of the G-Blok™ spreads the load, reducing rutting in heavy traffic areas. The chamfered tap edges reduce chipping of the G-Blok™ and assist in preserving the jointing sand.
- The paved surface is highly durable because of the strength and load-spreading abilities of the G-Blok™.
- There is less wastage and a neat finish with the unique full and half edge G-Blok™.



G-BLOK™ VERSATILITY FOR GOOD LOOKS AND PEACE OF MIND

- Exciting and Interesting patterns can be created with the plain and coloured G-Blok™ and the crazed edge Craz"E"™ G-Blok™.
- The surface can be reinstated as before, even after lifting the G-Blok™ to get to underground services.
- Both level and sloping surfaces can be covered, as the interlocking action of G-Blok™ works at any slope.
- G-Blok™ paving can be used in both heavy traffic and stacking areas and under most soil conditions because of its load carrying and spreading abilities.
- Over 80% of G-Blok™ can be recovered and re-used, even after many years in use.
- The paved area can be in use immediately it is completed, as there are no wet trades.
- G-Blok™ paving has a safe surface, particularly when wet, because of the textured, non-slip finish to the pavers.
- The Craz"E"™ textured block offers an architectural alternative to an industrial pavement.

G-BLOK™ APPLICATIONS

Heavy industrial areas, heavy parking areas, abnormally heavy industrial stacking areas, medium industrial working areas, parking areas and driveways, service areas and pitched banks.

DIMENSIONS

Length: 221.2mm
Width: 110.8mm
Thickness: 60 or 80mm.

EDGE BLOCKS


(only available in Gauteng)

COVERAGE

Approximately 40 blocks per m².

ESTIMATING

Allowance must be made for laying tolerance and edge cutting.

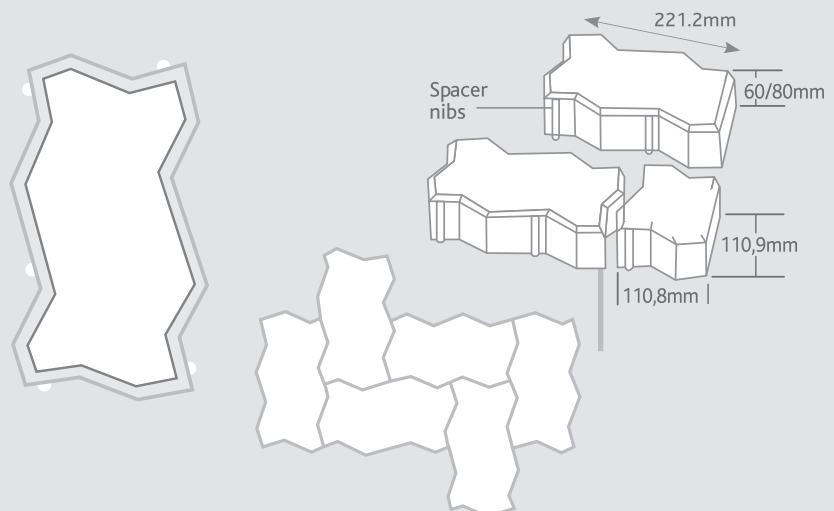

GAUTENG (Sales Office)
Samrand Avenue West, Centurion, 0157
PO Box 45, The Reeds, 0061
Tel +27 (0)12 652-0000
Fax +27 (0)12 652-0132
Email infrasetinfo@infraset.com

KWAZULU-NATAL (Sales Office)
Off Nandi Drive (North), Effingham, 4061
PO Box 40313, Redhill, 4071
Tel +27 (0)31 569 6900
Fax +27 (0)31 569 6903
Email infrasetinfo@infraset.com



www.infraset.com