

# Marmoran

The Architects' Choice

## AQUANIL


MEDIUM SHEEN PURE ACRYLIC PAINT



### PRODUCT INFORMATION

- Based on a specially formulated hydrophobic acrylic polymer that promotes self-cleaning and fungal resistance
- High hiding properties and scrub resistant
- Designed for interior or exterior use
- Offers excellent dirt shedding, and water resistance
- Pleasant low sheen
- With a smooth & velvety feel, it is a pleasure to touch
- Eco friendly, water based, LOW VOC LEVEL [23g/L]
- Made to order, supplied ready to use

**TESTED TO NATIONAL & INTERNATIONAL STANDARDS BY THREE INDEPENDENT LABORATORIES.**

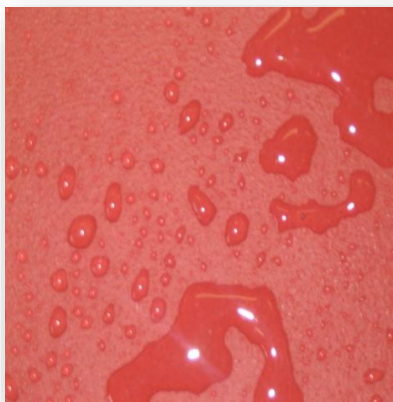

### MARMORAN GUARANTEE

**MARMORAN 7 YEAR PRODUCT GUARANTEE** is issued on condition that the system is applied by a Marmoran Licensed Applicator in strict accordance to the full specification and is accepted and signed by the relevant parties. Due to the demand for the highest standard of application and finish, it must be applied by a trained applicator that is skilled and experienced.

SA National Enquiries: 0861 627 266

[www.marmoran.co.za](http://www.marmoran.co.za)

B-BBEE COMPLIANT

© COPYRIGHT 2008:

No part of this document may be reproduced by any means unless express written permission has been granted by MARMORAN (Pty) South Africa.

International enquiries: +27 21 797 4250

Email: [info@marmoran.co.za](mailto:info@marmoran.co.za)

11.12.2019

# Marmoran

The Architects' Choice

## AQUANIL

PRODUCT CODE AC019

PRODUCT DATA INFORMATION SHEET

### PRODUCT DESCRIPTION

Marmoran Aquanil is a superior quality coating with a pleasing medium sheen that is based on a unique, specially formulated fine particle size pure acrylic polymer with inherent hydrophobic properties. This hydrophobic nature of the polymer in Marmoran Aquanil offers excellent dirt shedding, water resistance, fungal resistance and promotes self-cleaning.

### TESTED TO NATIONAL & INTERNATIONAL STANDARDS BY THREE INDEPENDENT LABORATORIES TEST STANDARDS

<b>ASTM D4828</b>	Easily cleaned up to 10,000 scrubs without exhibiting wear or signs or loss of adhesion
<b>CGRI/R+H</b>	Superior quality pure acrylic resin ensures resistance to dirt pickup
<b>ASTM 4060</b>	Tough & durable with high resistance to abrasion & scuffing
<b>ASTM G53</b>	UV resistant to prevent excessive chalking, colour change, flaking or peeling
<b>ISO 1519</b>	Exhibits outstanding flexible qualities, yet hard and durable to withstand the stresses of natural expansion and contraction of the substrate
<b>ASTM E96</b>	Controlled water vapour permeability allows the walls to "breathe" to maintain resistance to water ingress and prevent spalling, delamination, algae and dirt retention
<b>ISO 2409</b>	Superior adhesion to all suitably primed substrates
<b>SABS 170</b>	Excellent resistance to alkali salts to prevent coating delamination and adhesion
<b>SABS 1586</b>	Ability to withstand high temperatures with no signs of delamination, blistering or loss of adhesion
<b>SABS 146</b>	Excellent impact resistance and tensile strength
<b>ISO 12040</b>	Exceptional weathering, water repellency and ultraviolet resistant properties

### USES

- Designed for interior or exterior use as a protective and decorative coating for a wide variety of new or previously coated surfaces that have been suitably prepared. This includes cement plasters, concrete, Fibre-cement, ceiling boards, off shutter concrete, highly porous surfaces, gypsum.

### COLOURS

- Available in a wide colour range.

### PACKAGING

- 5 & 20 L

### GENERAL CONSIDERATION REGARDING APPLICATION

#### SITE SURVEY REPORTS

Site Survey Reports and Records are to be completed prior to product application, during the application and on completion of the project so that the relevant documentation is available for processing the Guarantee.

#### CLIMATIC CONDITIONS

Adequate protection should be provided against rain and sub-zero temperatures for a period of not less than 24 hours after application. The coating should never be applied during adverse weather conditions, or on wet surfaces. Even if the weather seems fit, there may be condensation if the temperature of the substrate is at or below the dew point (temperature at which the atmospheric humidity condenses e.g. as dew) the product should only be applied when the temperature of the substrate is at least 2 deg C above dew point. In hot climates, the coating should be applied during the morning and late afternoon hours and if possible, away from direct sunlight. Variations in temperatures will affect drying times.

SA National Enquiries: 0861 627 266

[www.marmoran.co.za](http://www.marmoran.co.za)

B-BBEE COMPLIANT

© COPYRIGHT 2008:

No part of this document may be reproduced by any means unless express written permission has been granted by MARMORAN (Pty) South Africa.

International enquiries: +27 21 797 4250

Email: [info@marmoran.co.za](mailto:info@marmoran.co.za)

11.12.2019

# Marmoran

The Architects' Choice

## AQUANIL

### APPLICATION CRITERIA

- Please refer to our notes on **BEST PRACTICES FOR SURFACE PREPARATION**.
- **Inspect the substrate:** The plaster substrate must conform to a smooth and even finish. This can be achieved with a fine wood float or we recommend a steel float finish.
- The product must be applied in strict accordance to the Manufacturer's System and Specification.
- Adequate time should be allowed for it to cure [confirm a moisture reading of <15%: this may take from 7-21 days, depending on weather conditions] prior to the application of any specialised, semi-specialised coating or paint.
- **Prepare the substrate** appropriately to ensure that the surface is clean, dry, sound and free of defects.
- Ensure that the **scaffold** be positioned at a comfortable distance away from the surface so that application technique is not compromised. (400-600mm).
- **Sealing of expansion/control joints:** we recommend the use of sealants compatible with the specified Marmoran product, a suitable Marmoran Primer may then be applied directly over these joint sealants.
- We strongly recommend the use of **tape joints** to create paneling and so to **avoid dry joints**.
- **Batch control** it is the responsibility of the contractor to ensure colour consistency. It is recommended that sufficient material to complete the project be ordered where possible to eliminate possible colour variation. Where this is not practical, sufficient material to complete an elevation should be ordered with any excess used as the first coat on the subsequent elevation.
- **Check** spread rates, tools and patterning.
- The product is **supplied ready for use. DO NOT THIN.** Clean with water.

### APPLICATION METHOD

- **Apply** 1 even coat **Marmoran Acrylic Primer** and allow to cure.
  - Apply 2 to 3 coats of **Marmoran Aquanil** tinted to the required colour by spray, roller or brush as per the approved colour. Allow for drying time between coats.
  - Spread rate: 7-9m<sup>2</sup> / L / coat
  - **Wet Film Thickness:** 143-111µ per coat    **Dry Film Thickness:** 50-39µ per coat
- The system must be applied in strict conformance to the manufacturers' instructions.

### SPECIFICATION for MARMORAN AQUANIL

#### NEW WORK

Prepare the substrate appropriately to ensure that the surface is clean, dry and sound and free of defects.

**Inspect the substrate:** The plaster substrate must conform to a smooth and even finish. This can be achieved with a fine wood float or we recommend a steel float finish. Adequate time should be allowed for it to cure [confirm a moisture reading of <15%: this may take from 7-21 days, depending on weather conditions] prior to the application.

**Apply** an even coat of **Marmoran Acrylic Primer**.

**Apply** the **Marmoran AQUANIL** to match the approved **Marmoran Sample Reference Number:**

**GS/**\_\_\_\_\_.

**A MARMORAN 7 YEAR INTERNATIONAL GUARANTEE UNDERWRITTEN BY A THIRD PARTY** is issued on condition that the system is applied by a Marmoran Licensed Applicator in strict accordance to the full specification and is accepted and signed by the relevant parties. Due to the demand for the highest standard of application and finish, it must be applied by a trained applicator that is skilled and experienced.

# Marmoran

The Architects' Choice

## AQUANIL

### REDECORATION

Prepare the surface by removing all loose and flaking paint, dirt, grease and grime. Make good all cracks and defects and then repair and prime to match the existing surface. Proceed as for new work.

### PRODUCT DATA

**Composition**  
**Solvent Type**  
**VOC LEVEL**

Pure Acrylic, Pigments, Extenders  
Water

**23 g/L [1.76%] white, pastel & medium colours.**  
**The GREEN SEAL STANDARD is 50g/L [3.8%] for flat coatings.**

**Solids:**  
**Drying Times @ 25 deg C, 65% RH**

Volume: 31% ± 2%    Mass Solids: 45% ± 2%  
**Surface Dry:** 2 hours, **Hard Dry:** 6-12 hours, **Over-coating Time:** 12 hours    Higher temp will accelerate the drying times (± halved for every 10 °C increase). Lower temp. will retard the drying times (±doubled for every 10 °C decrease).

**Theoretical Spreading Rates:**

7-9m<sup>2</sup> / L / coat. Apply two or three coats to new surfaces so as to achieve complete obliteration.

This figure is indicative, and subject to applicator skill and substrate type and condition.

**Shelf Life and Storage:**

6 - 8 Months in unopened containers. Store in a cool dry and well-ventilated place away from excessive heat or open flame. Do not allow to freeze.

### TRANSPORT:

This product is non-hazardous in accordance with Transportation and Classification of Dangerous Goods Act (1996)

### HANDLING & SAFETY:

This product is water based and non-toxic. Keep out of reach of children. It does contain chemicals that may be irritants to mammalian tissue. Appropriate protective clothing must be worn. Protect eyes and skin from exposure. If the product is being sprayed, ensure adequate ventilation and ensure the use of proper ventilated masks. Wash spillages immediately with water. Do not induce vomiting if swallowed. Consult a physician if irritation of skin persists or if product is ingested. Gather up environmental spillages and dispose of in accordance with regulations of the local authorities.

### DISCLAIMER

All information contained herein is given in good faith, based on our specialised knowledge and experience. We reserve the right to effect changes to product and specification alike in the interest of product development and improving technology.