



CORVUS CONCEALED BATH/SHOWER MIXER

032033

SPECIFICATION SHEET

PRODUCT DETAILS

SEDAL CARTRIDGE SEDAL ANTI-SCALD CARTRIDGE
(TEMPERATURE CONTROL)

TECHNICAL SPECIFICATIONS



FLOW RATE 23,5L/ MINUTE @ 300Kpa

SABS APPROVED*

BRASS GRADE DZR (dezincification resistant brass)
Cz132

CHROME PLATING 200 HOUR SALT SPRAYED FINISH
(Ni: 7 μ & Cr: 0.2 μ) THICKNESS

QUIET-FLOW TECHNOLOGY BUILT-IN NOISE
SURPRESSOR IN CARTRIDGE

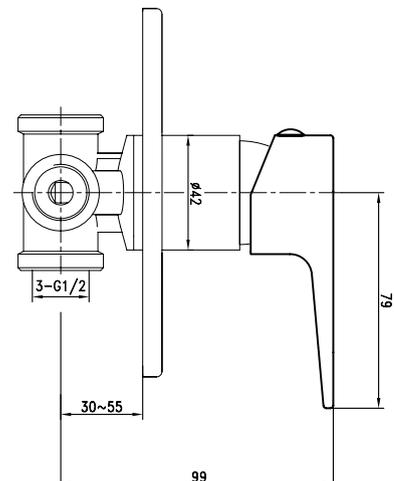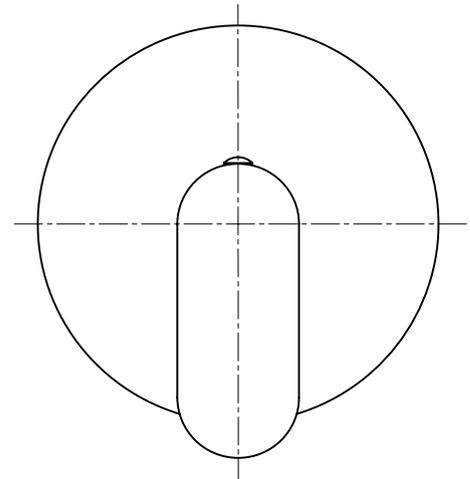

CLEANING INSTRUCTIONS

1. Avoid cleaning agents containing ingredients, such as chlorine bleach, formic acid, acetic or Hydrochloric acid.
2. Wipe all surfaces using a soft unabrasive cloth, with warm soapy water.



10 YEAR WARRANTY

WWW.PLUMBLINK.CO.ZA

Plumblink tries its best to ensure that the information given on our website is accurate. Although, we cannot guarantee this for certain, and accept no liability for any information.