

PIERCED FIX FLASHINGS AND CLOSURES

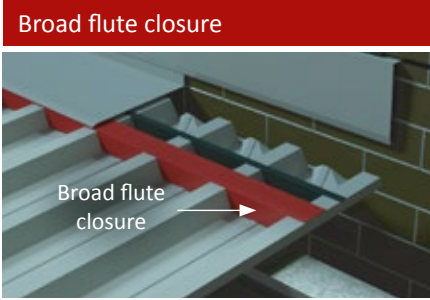
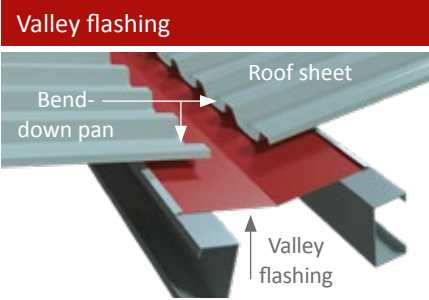
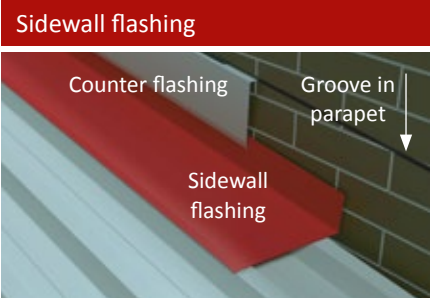
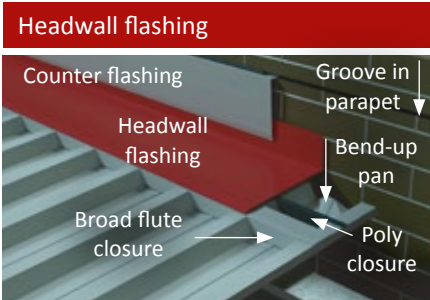
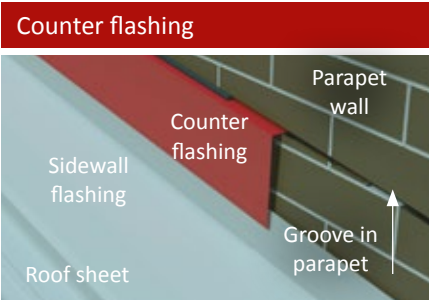
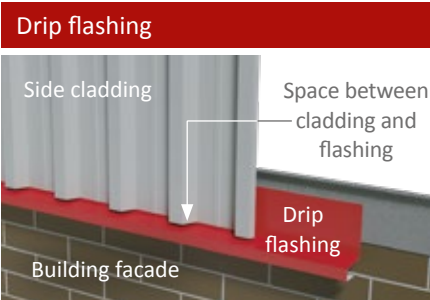
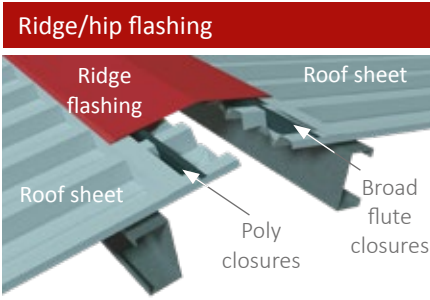
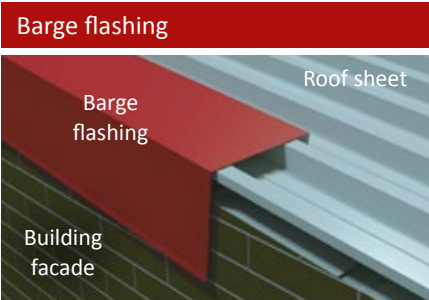
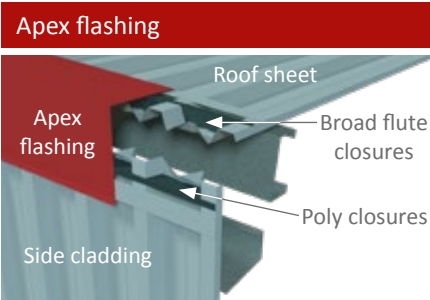
Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.

Industrial and commercial flashings tend to be functional more than aesthetic. Safintra makes a range of standard flashings which are suitable for this purpose. Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.

Safintra is able to produce most custom designed flashings for residential and other applications. Please ask your local branch for more information.

Flashings are usually made in the same material as the roof for colour matching. Complementing or matching colours may be used as required. All counter flashings are to be sealed with a neutral cure Silicone - not cement.

Note 1: Longitudinal flashings to be fastened at 500mm centres. Flashings to be lapped at minimum 150mm for roof flashings and at 100mm for side cladding.



PIERCED FIX

Apex flashing		Dimensions	231 x 231
		Angle	Calculation: 90°- roof pitch
		Girth	462
		Comment	Use with broad flute closures + polyclosures
Barge flashing		Dimensions	231 x 231
		Angle	90°
		Girth	462
		Comment	-

PIERCED FIX

















classi**corr**
corrugated

TUFDEK

WIDEDEK

FLUTELINE

Trimflute

Ridge flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (2 \times \text{roof pitch})$				
	Girth	462				
	Comment	Use with broad flute closures + poly closures				
Roll top ridge flashing 	Dimensions	231 x 231				
	Angle	140° standard				
	Girth	462				
	Comment	Use with broad flute closures + poly closures				
Hip cap 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (1.5 \times \text{roof pitch})$				
	Girth	462				
	Comment	Use with blank closures notched + poly blocks				
Drip flashing 	Dimensions	60 x 50 x 20 x 24				
	Angle	92°				
	Girth	154				
Counter flashing 	Dimensions	SB 12 x 30 x 112				
	Angle	i) 157.7° ii) 88°				
	Girth	154				
Headwall flashing 	Dimensions	77 x 231				
	Angle	Calculation: $90^\circ + \text{roof pitch}$				
	Girth	308				
Sidewall flashing 	Dimensions	77 x 231	77 x 231	77 x 231	63 x 245	77 x 231
	Angle	90°				
	Girth	308				
External corner 	Dimensions	231 x 231				
	Angle	90°				
	Girth	462				
Internal corner 	Dimensions	231 x 231				
	Angle	90°				
	Girth	462				
Valley flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (1.5 \times \text{roof pitch})$				
	Girth	462				
	Comment	Stiffener bend at 158° degree angle				
Roll top valley flashing 	Dimensions	231 x 231				
	Angle	140° standard				
	Girth	462				
Under-over flashing 	Dimensions	231 x 231				
	Angle	Calculation: $180^\circ - (i - ii)$				
	Girth	462				
Broad flute closure	Profile					
	Length	N/A	700	775	900	1020
	Comment	Need one closure per roof sheet				

All dimensions given in millimetres.
Diagrams are for illustrative purposes only.

Note 2: SB = Stiffener bend is 15mm included at 15°, unless otherwise stated.