

Primo Collection

All your needs covered

The Premium range is a global solution combining attractive design and functional performance, with options available to cover all your needs.



No slipping

Primo Safe.T, **R10** grip, is available in 15 core matching colours.



Static Dissipative

Primo SD, the static dissipative option is available in 8 core matching colours.

Coordinated Welding rods - NCS - LRV

Primo Premium	Colours	NCS No.	LRV	Welding Rods Multicolour
600	medium warm grey	S 3502-Y	38%	1290 377
625	clay grey	S 4005-Y50R	31%	1290 378
631	sand	S 2010-Y30R	56%	1290 379
632	dark brick grey	S 5010-Y70R	21%	1290 380
638	ocean blue	S 3020-B10G	34%	1290 381
639	sky blue	S 2020-B	46%	1290 382
640	white olive green	S 1510-G60Y	62%	1290 383
641	dark orange	S 2050-Y60R	30%	1290 384
651	light pure grey	S 1000-N	74%	1290 152
652	grey	S 2500-N	50%	1290 153
653	light red	S 2050-Y80R	28%	1290 385
654	black	S 8502-B	6%	1290 155
655	medium grey beige	S 3005-Y20R	42%	1290 156
656	dark warm grey	S 6502-Y	16%	1290 157
657	medium cool beige	S 2005-Y50R	54%	1290 159
658	medium warm beige	S 2005-Y40R	55%	1290 159
659	dark warm beige	S 3010-Y40R	39%	1290 160
661	light yellow	S 1020-Y30R	65%	1290 162
663	soft purple	S 3030-R20B	26%	1290 386
664	soft yellow	S 2020-Y30R	50%	1290 387
665	medium blue	S 3030-R80B	27%	1290 164
666	dark blue	S 4040-R90B	15%	1290 165
667	soft orange	S 2020-Y50R	46%	1290 388
668	soft red	S 2020-Y90R	44%	1290 389
670	medium pure grey	S 2002-R50B	56%	1290 222
671	medium grey	S 4000-N	34%	1290 022
672	light warm grey	S 2002-Y50R	56%	1290 220
673	medium cool grey	S 4502-B	29%	1290 225
674	dark cool grey	S 6502-B	15%	1290 229
675	light cool beige	S 1505-Y60R	62%	1290 229
676	dark cool beige	S 5005-Y50R	24%	1290 218
678	light beige	S 1005-Y40R	71%	1290 232
679	light green	S 2010-G30Y	53%	1290 219
680	medium green	S 3020-G30Y	37%	1290 059
681	dark green	S 4030-G30Y	24%	1290 233
682	light blue	S 2020-R80B	43%	1290 234

Primo Safe.T	Colours	NCS No.	LRV	Welding Rods Multicolour
790	light pure grey	S 1000-N	74%	1290 369
791	medium pure grey	S 2002-R50B	56%	1290 284
792	medium grey	S 4000-N	34%	1290 285
793	light warm grey	S 2002-Y	56%	1290 286
794	medium cool grey	S 3502-B	37%	1290 287
795	dark cool grey	S 6502-B	15%	1290 288
796	light cool beige	S 1502-Y50R	64%	1290 289
797	medium cool beige	S 1505-Y50R	63%	1290 290
798	dark cool beige	S 5005-Y50R	24%	1290 291
800	medium warm beige	S 2005-Y40R	55%	1290 293
801	dark warm beige	S 3010-Y30R	41%	1290 368
802	light green	S 2010-G30Y	53%	1290 295
803	medium green	S 3020-G30Y	37%	1290 296
805	light blue	S 2020-R80B	43%	1290 370
806	medium blue	S 3030-R80B	27%	1290 299

Primo SD	Colours	NCS No.	LRV	Welding Rods Multicolour
561	medium pure grey	S 2002-R50B	56%	1290 274
562	medium grey	S 3500-N	39%	1290 275
563	dark cool grey	S 6502-B	15%	1290 276
564	light cool beige	S 1502-Y50R	64%	1290 277
565	medium warm beige	S 2005-Y40R	55%	1290 278
567	medium green	S 3020-G30Y	37%	1290 280
568	dark green	S 4030-G30Y	24%	1290 281
569	medium blue	S 3030-R80B	28%	1290 282

LRV = Luminous Reflectance Value.

PREMIUM COLLECTION – HOMOGENEOUS VINYL

Primo Collection

TECHNICAL DATA	STANDARD	PRIMO PREMIUM	PRIMO SAFE.T	PRIMO SD
CLASSIFICATION				
Classification	ISO 10581	Homogeneous vinyl flooring	–	Static dissipative pressed homogeneous vinyl flooring
	EN 13845	–	Slip resistant homogeneous vinyl flooring	–
	EN ISO 10874	34-43	34-43	34-43
	ISO 10581	Type I	–	Type I
Wear layer binder content				
TECHNICAL CHARACTERISTICS				
Total thickness	EN ISO 24346	3.7 mm	2.0 mm	2.0 mm 2.0 mm
Total weight	EN ISO 23997	3000 g/m²	3000 g/m²	3000 g/m²
Surface treatment		PUR reinforced	Safe.T clean XP™	–
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 lm x 200 cm Art. no. 21010 _ _ _ 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21013 _ _ _ 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21012 _ _ _ 3 digit colour number
	EN ISO 24342 Tiles (box)	61 x 61 cm - 14 tiles/box = 5.21 m² Art. no. 21011 _ _ _ 3 digit colour number	–	61 x 61 cm - 16 tiles/box = 5.95 m² Art. no. 21016 _ _ _ 3 digit colour number

PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)				
Declaration of Performance	EN 14041	0019-0018-DoP-2013-07	0019-0047-DoP-2013-07	0019-0050-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _e -s1 ≥ 8 kW/m² Pass	Class B _e -s1 ≥ 8 kW/m² Pass	Class B _e -s1 ≥ 8 kW/m²
Electrostatic properties	EN 1815	< 2 kV	< 2 kV	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip

TECHNICAL PERFORMANCES				
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm
Slip resistance	DIN 51130	R9	R10	R9
Clean room test	ASTM F24 F51 ISO 14644-1	Class A ISO class 4	–	–
Ease of decontamination	ISO 8690	Good	–	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth	Does not favour growth	Does not favour growth
Chemical resistance	ISO 26987	Good resistance	Good resistance	Good resistance
Castor chair	ISO 4918	Suitable	Suitable	Suitable
Flexibility	ISO 24344	Pass	Pass	Pass
Dimensional stability	EN ISO 23999	≤ 0.40 % for rolls ≤ 0.25 % for tiles	≤ 0.40 % ≤ 0.25 % for tiles	≤ 0.40 % for rolls ≤ 0.25 % for tiles
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6
Electrical insulation	VDE 0100, Part 600	–	–	R _i ≥ 5x10⁴ Ω
Electrical resistance	EN 1081	–	–	R _i ≥ 10⁹ Ω
Bare foot test	DIN 51097	–	Class B (≥ 18°)	–
Seam strength	EN 684	–	–	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm
Underfloor heating		Individual values: ≥ 400 N/50 mm Suitable - max. 27°C	Individual values: ≥ 400 N/50 mm Suitable - max. 27°C	Suitable - max. 27°C

ENVIRONMENTAL PERFORMANCES				
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum
COLOURS				
		36	15	8

The above information is subject to modification for the benefit of further improvement. (04/18).
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.
Colours of the products shown in the photos or samples are indicative only. There may be differences in colours, gloss and embossing structure between the products sold and photos or samples.



www.professionals.tarkett.com



0861 999 121 | sales@fisa.co.za



Printed on 100% recycled paper and cardboard - 100% recyclable

Primo Collection

phthalate free
100%



ROLL

TILE

HOMOGENEOUS VINYL



0861 999 121 | sales@fisa.co.za



Primo Collection

HOMOGENEOUS VINYL

Versatile flooring for heavy traffic and technical environment



Doing Good. Together

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.



Designing for life

Developing products based on Cradle® principles that contribute to people friendly spaces AND respect the planet's natural capital.



Healthy spaces thanks to 100% phthalate-free product

Since 2010, we have developed the use of a phthalate-free plasticizer technology for our vinyl floors which is approved for food containers and toys intended to be placed in the mouth by children.



Good indoor air quality

Through low levels of total volatile organic compounds (TVOCs) - TVOCs ≤ 10 µg/m³, much lower than EU standard EN ISO 16000.



Closing the loop


Building a circular economy inclusive of programs and business models that encourage take-back, recycling, reuse and elimination of waste.

Premium Collection is eligible to ReStart®, Tarkett's take-back program which can help customers manage their installation waste while ensuring it is recycled.




PREMIUM COLLECTION – HOMOGENEOUS VINYL


Primo Premium

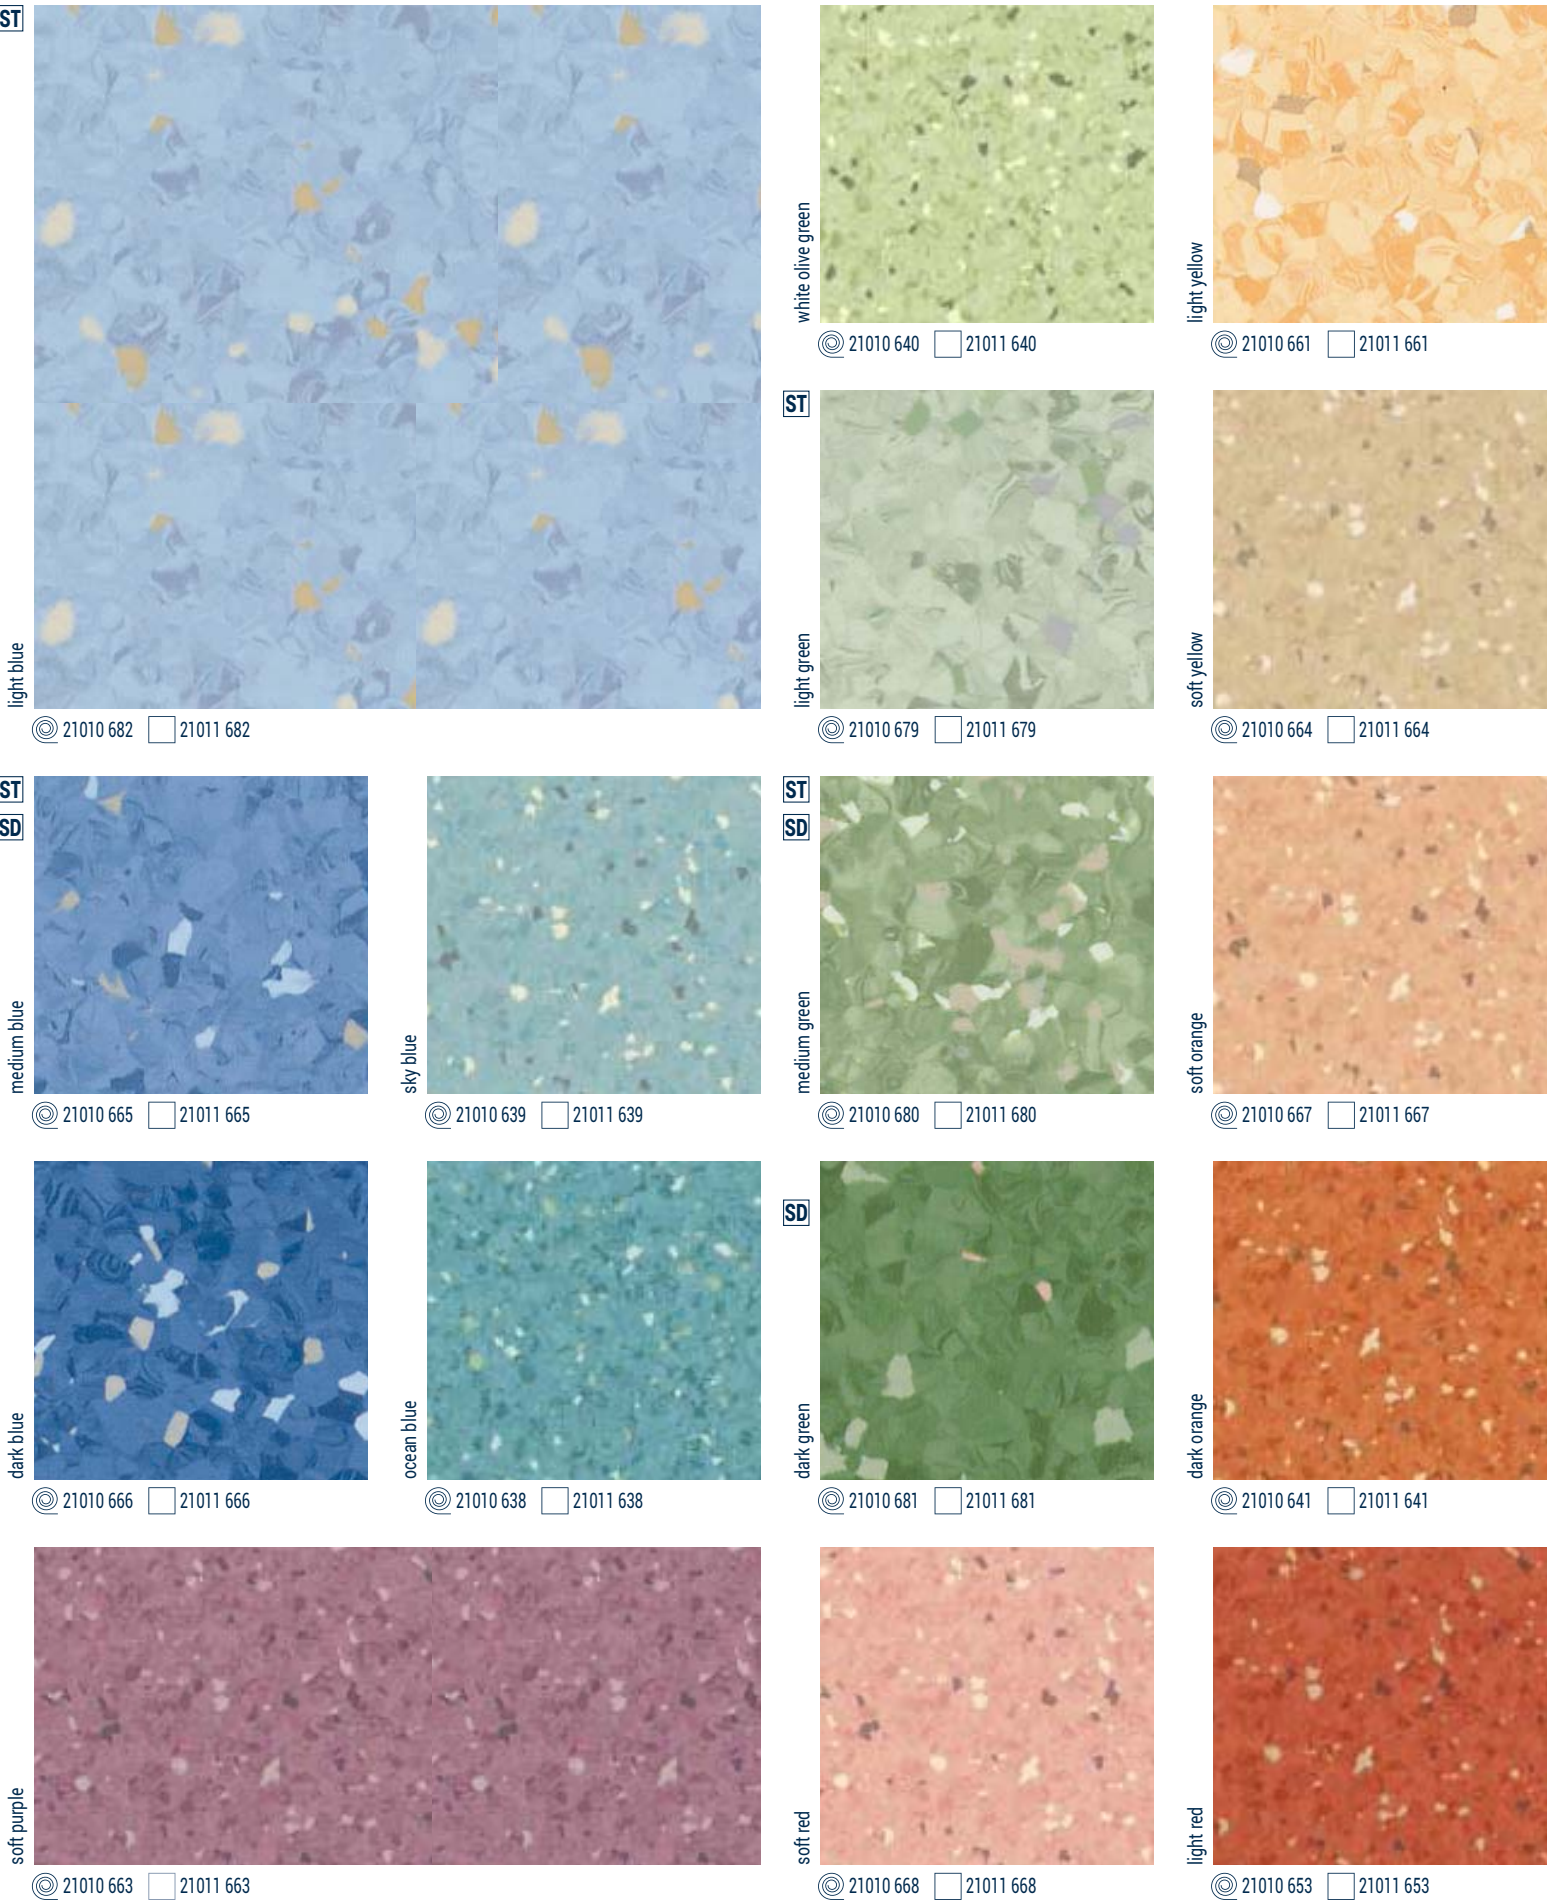



Primo Premium

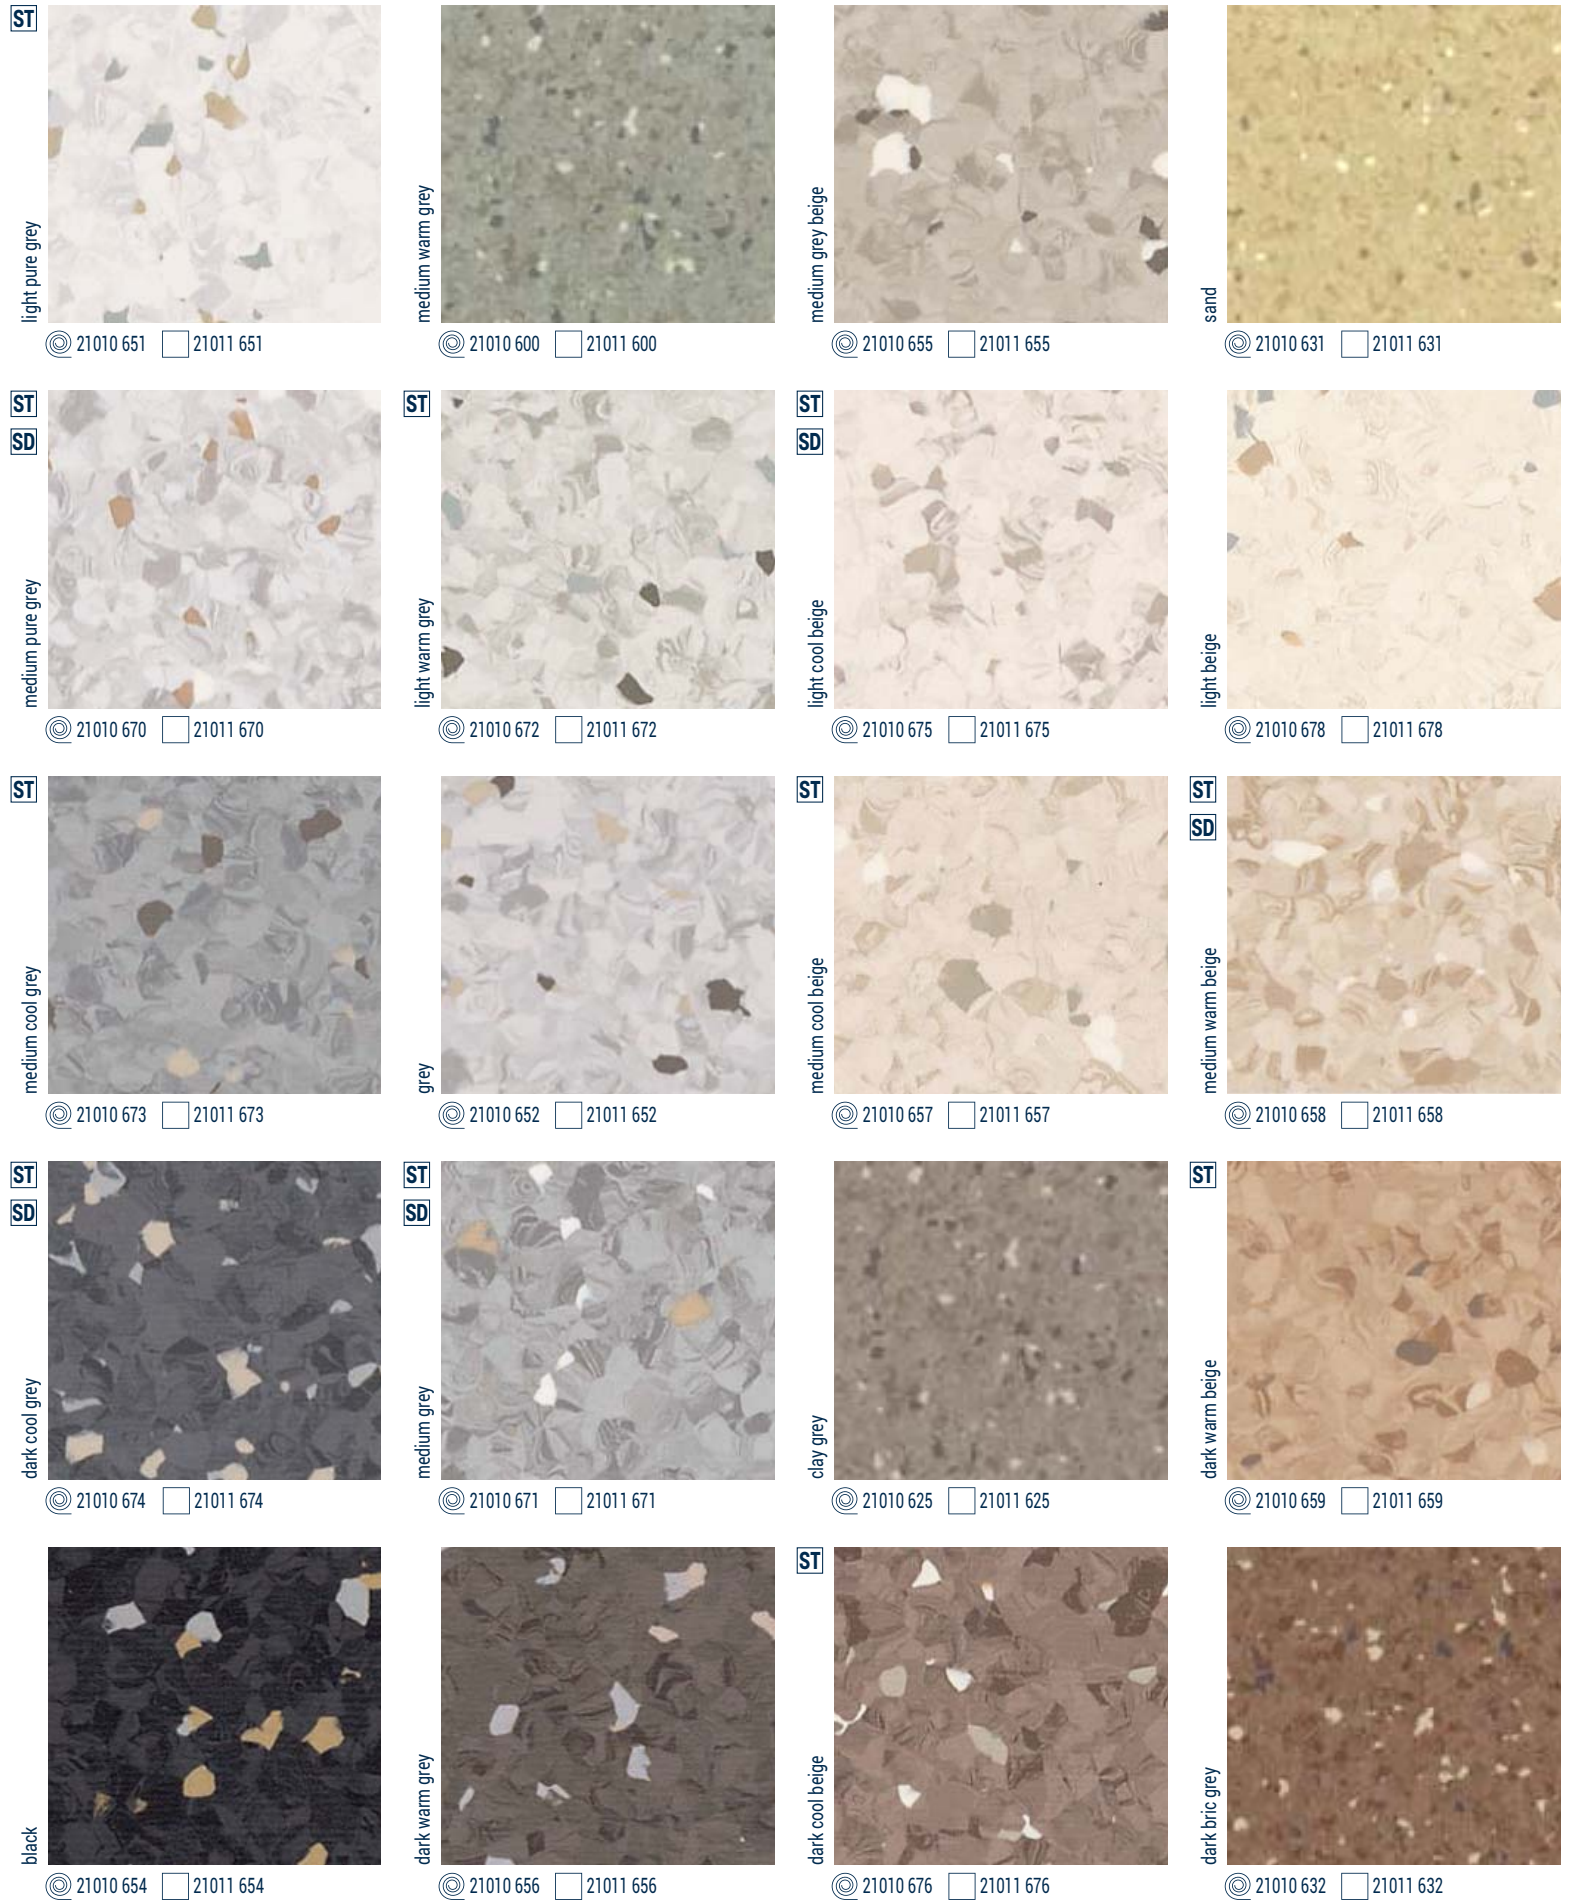

Primo Safe.T

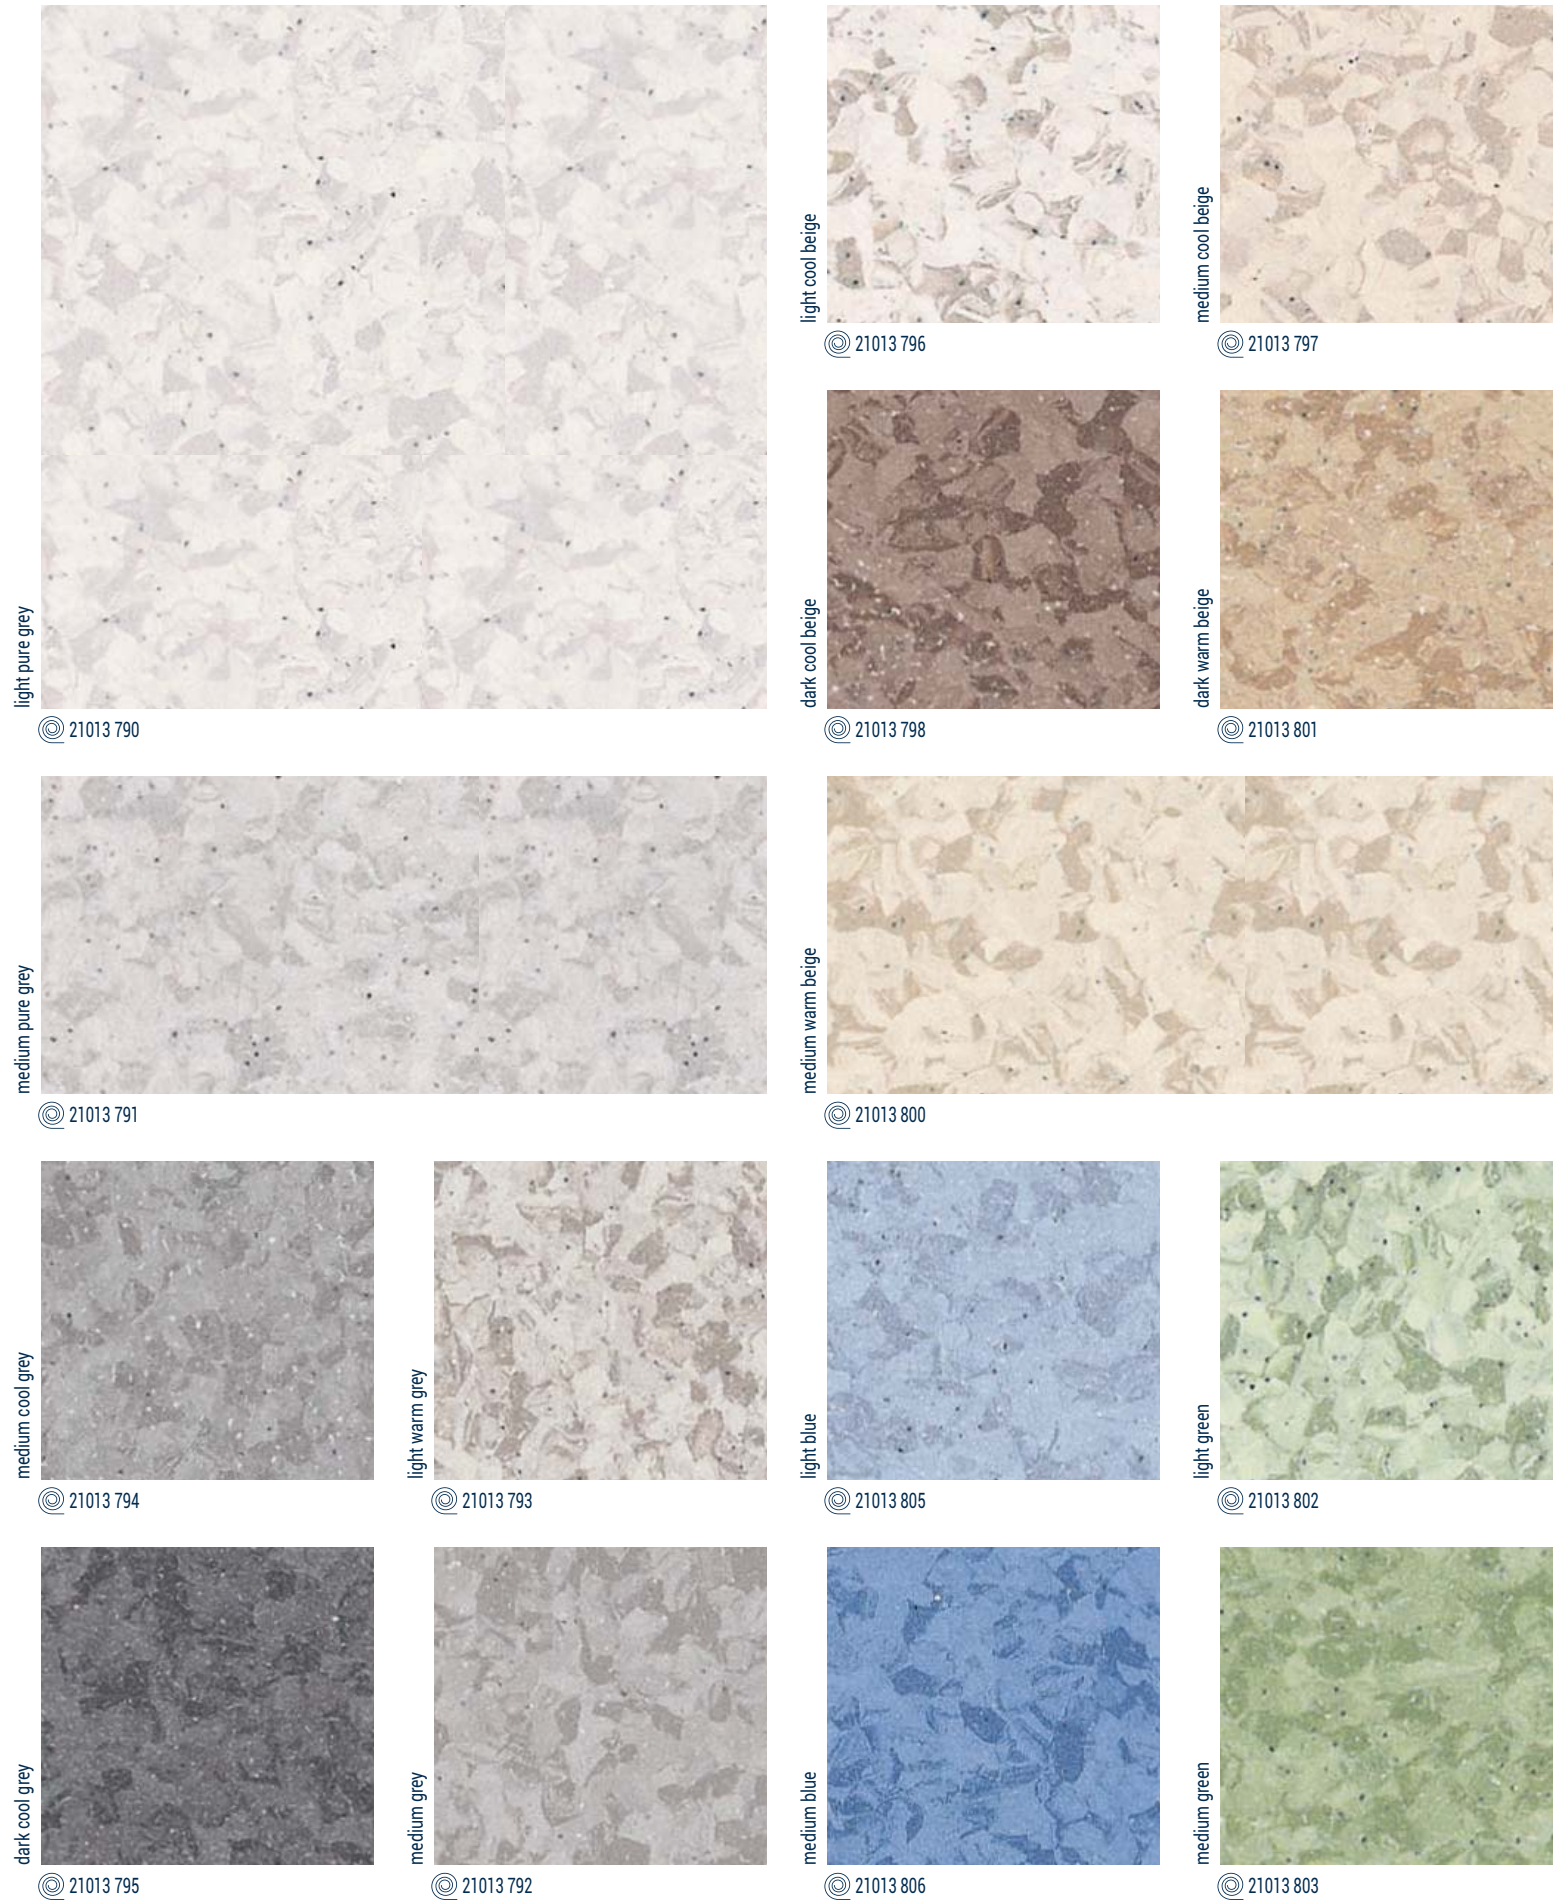

Primo SD

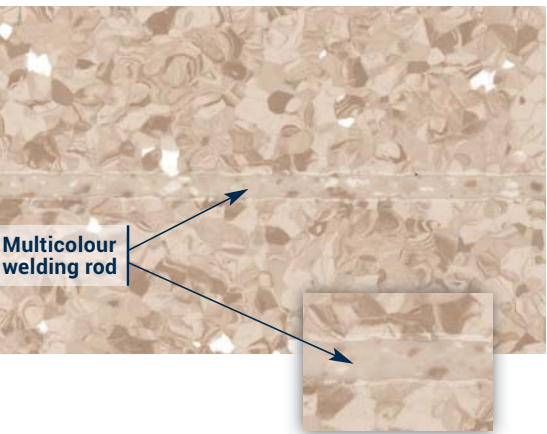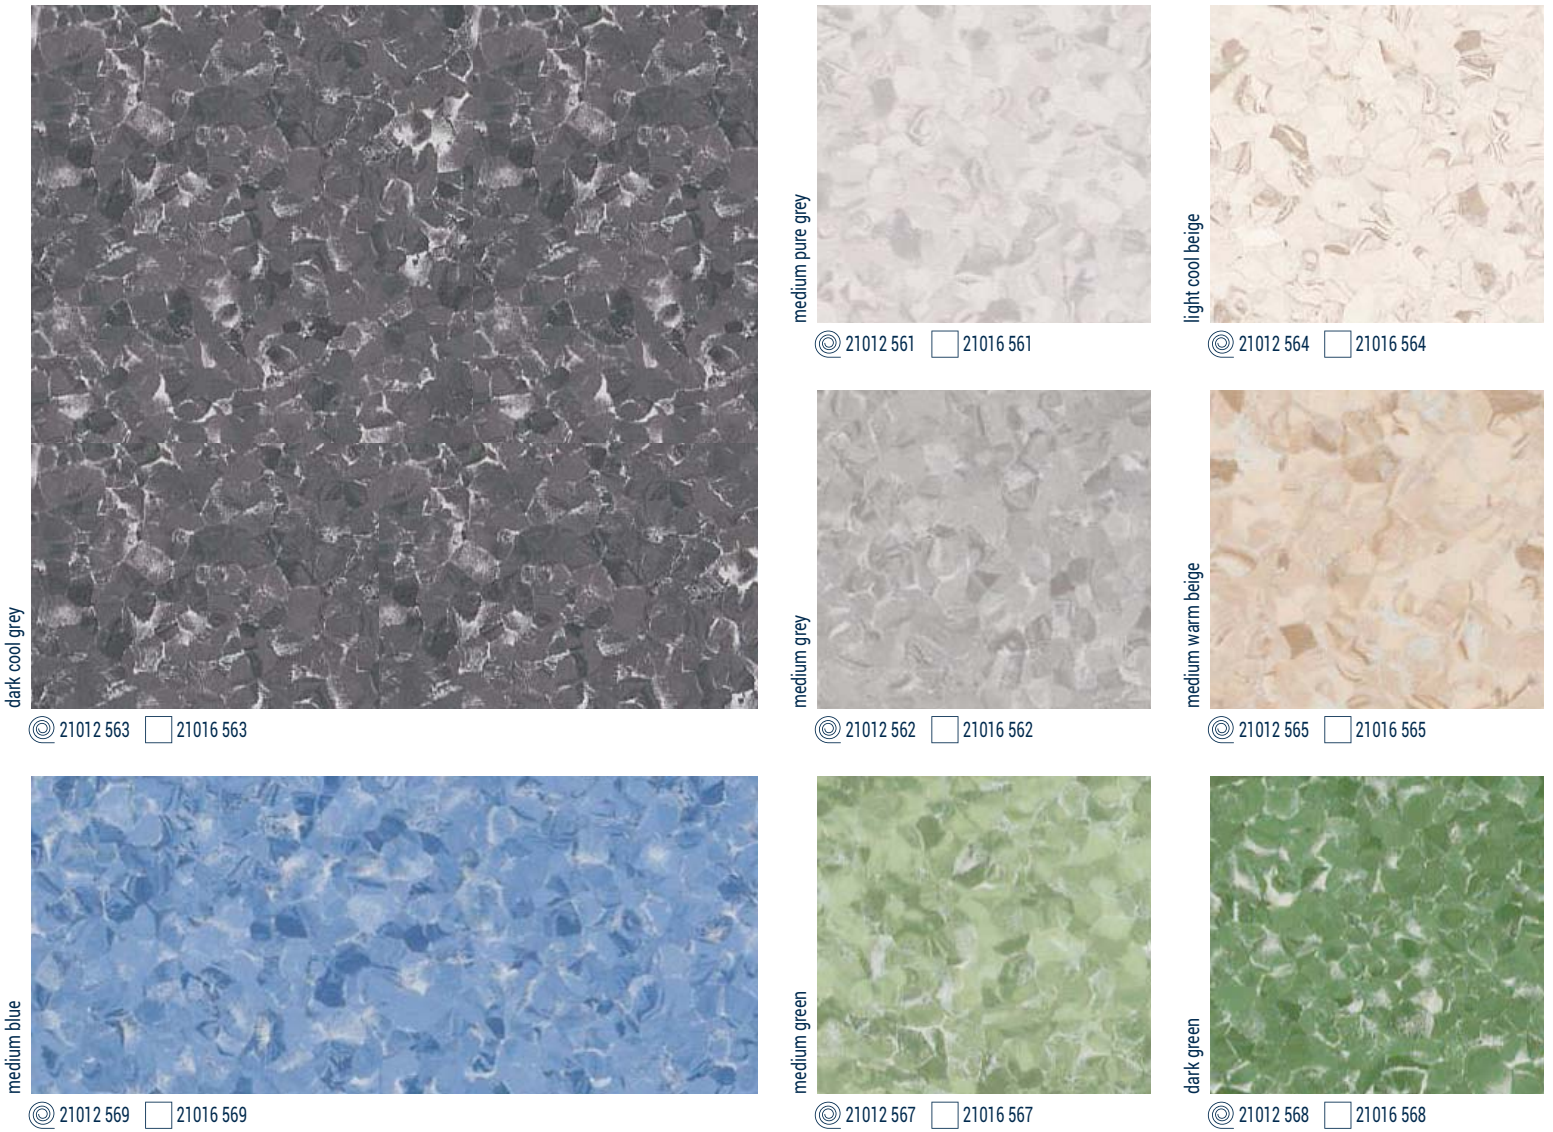

Multi-colour welding rods

Colour and pattern coordinated welding rods are available for every colour in the Premium collection. With contrasting colour chips that coordinate with the flooring's accent colour and design, the welding rods always provide the perfect finishing touch.