
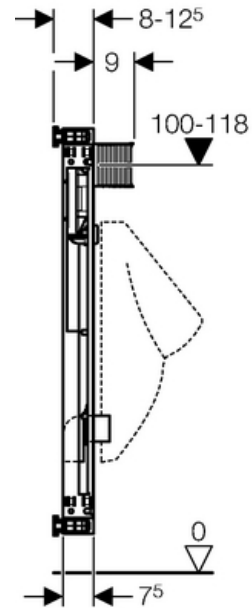


## element for urinal, 109-127 cm, Universal

PRO\_101295

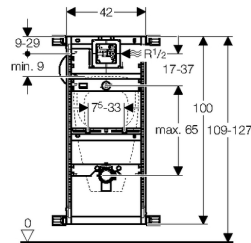

### Verwendungszwecke / Application Purposes

- For masonry walls
- For installation in part- or room-height prewall installations
- For mounting urinals
- For installation of Geberit urinal flush controls (from year of manufacture 2009)

### Eigenschaften / Characteristics

- Mounting frame, zinc-plated, with four fixing brackets
- Adjustable installation depth, 8–12.5 cm
- Installation depth without fixing bracket 7.5 cm
- Protection cover box for service opening protects against moisture and dirt
- Element height adjustable to urinal, 109–127 cm
- Universal concealed housing for Geberit urinal flush controls
- Terminal for electrical connection in concealed housing
- Water supply connection at right on concealed housing
- Water supply connection compatible with MeplaFix, can be mounted without tools
- Stop valve with throttle pre-mounted
- With built-in conduit pipe to rinse the pipeline
- Protection box for service opening 10.5 x 10.5 cm can be cut to length without tools
- Flexible flush hose with guide to prevent standing water
- Fastening for inlet  $\varnothing$  32 mm, height-adjustable
- Fastening for connection bend, height-adjustable and sound-absorbing
- Urinal fasteners M8 width- and height-adjustable
- Crossbars with centring marks, adjustable without tools
- Additional fastening possible for urinal with accessories
- Can be retrofitted with accessories to fit urinals with spray head

### Technische Daten / Technical Data

Flow pressure	100-800 kPa
Maximum test pressure, water	16 bar
Maximum test pressure, water	1600 kPa
Maximum test pressure, air / inert gas	3 bar
Maximum test pressure, air / inert gas	300 kPa
Maximum operating temperature, water	30 °C
Flow rate at 1 bar without flow limiter	0.3 l/s
Flow rate at 1 bar with flow limiter	0.24 l/s

### Lieferumfang / Scope of delivery

- Water supply connection R 1/2
- Protection box for service opening
- Connection set for urinal, with urinal trap

- Connection bend made of PE-HD, ø 50 / 63 mm
- Seal, ø 57 / 50 mm
- 2 protection plugs
- 2 threaded rods M8
- Fastening material

### Bestelltabelle / Order Table

Art. no.

457.611.00.1

### Zusätzlich zu bestellen / To order additionally

### Zubehör / Accessories

Accessory overview: Geberit Kombifix elements for urinals

---

### Interne Daten / Internal Data

Art. no.	Material short text	Sales launch date	GS	Assortment status
457.611.00.1	KF UR Universal H109-127 inst set	2009-01-01	50	Active

### Logistik Daten / Logistic Data

Art. no.	PU1[Pc.]	PU4[Pc.]	PU1 - L x W x H[mm]	VP4 - L x W x H[mm]	Gross weight[kg]	Net weight[kg]
457.611.00.1	1	14	1145 x 114 x 523	1200 x 800 x 1290	6.5	5.75