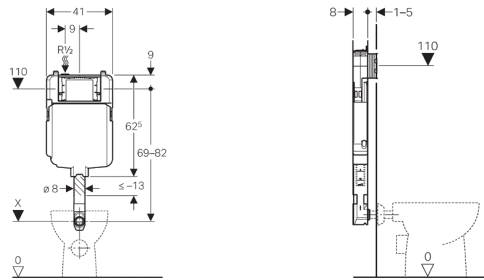


Geberit Sigma concealed cistern 8 cm, 6 / 3 litres

NEW


Application purposes

- For masonry walls
- For installation in part- or room-height prewall installations
- For installation in room-height installation walls
- For floor-standing WCs
- For single flush, dual flush or stop-and-go flush

Characteristics


- Series 2016
- Concealed cistern with front actuation, fully insulated against condensation
- Direct plastering netting, pre-mounted
- Immediate post flush possible with factory setting
- Flush bend fitted
- Flush bend adjustable 2 cm upwards and 1 cm downwards
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection at the top, offset to left side
- Protection box for service opening can be cut to length, suitable for surface-even actuator plates


Technical data

Flow pressure	0.1-10 bar
Flush volume, factory setting	6 and 3 l
Flush volume large, adjustment range	4.5 / 6 / 7.5 l
Flush volume small, adjustment range	3-4 l

Scope of delivery

- Water supply connection R 1/2, compatible with MeplaFix, with integrated angle stop valve and hand wheel
- Protection box for service opening
- Flush bend with recess shells
- Flush bend extension, \varnothing 45 mm
- Protection plug
- 2 slotted flat irons
- Fastening material

Article
Art. no.
109.791.00.1
 Actuator plate has to be ordered separately

 Available as of April 2016